




OIL ANALYSIS REPORT

Sample Rating Trend

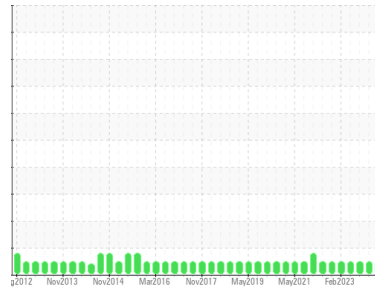

NORMAL



Area
Powerhouse Machine Room
 Machine Id
LBLUBE2
 Component
Bearing
 Fluid
SHELL TELLUS 46 (425 LTR)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC	WC	WC
Sample Date	Client Info	05 Jun 2024	12 Feb 2024	25 Oct 2023
Machine Age	mths Client Info	0	0	0
Oil Age	mths Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	0	0	0
Chromium	ppm ASTM D5185(m) >20	0	0	0
Nickel	ppm ASTM D5185(m) >20	<1	0	<1
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	0	0	<1
Aluminum	ppm ASTM D5185(m) >20	0	<1	0
Lead	ppm ASTM D5185(m) >20	<1	2	2
Copper	ppm ASTM D5185(m) >20	61	59	61
Tin	ppm ASTM D5185(m) >20	0	<1	<1
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES






method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0.0	0	0	<1
Barium	ppm ASTM D5185(m) 0	0	0	<1
Molybdenum	ppm ASTM D5185(m) 0	0	0	0
Manganese	ppm ASTM D5185(m)	0	0	0
Magnesium	ppm ASTM D5185(m) 11	5	4	5
Calcium	ppm ASTM D5185(m) 35	14	15	15
Phosphorus	ppm ASTM D5185(m) 266	232	235	230
Zinc	ppm ASTM D5185(m) 276	186	190	195
Sulfur	ppm ASTM D5185(m) 1847	1156	1242	1164
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	0	0	0
Sodium	ppm ASTM D5185(m)	0	0	<1
Potassium	ppm ASTM D5185(m) >20	0	<1	0

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	144	95	183
Particles >6µm	ASTM D7647 >2500	32	37	46
Particles >14µm	ASTM D7647 >160	4	6	6
Particles >21µm	ASTM D7647 >40	1	2	2
Particles >38µm	ASTM D7647 >10	0	0	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/14	14/12/9	14/12/10	15/13/10

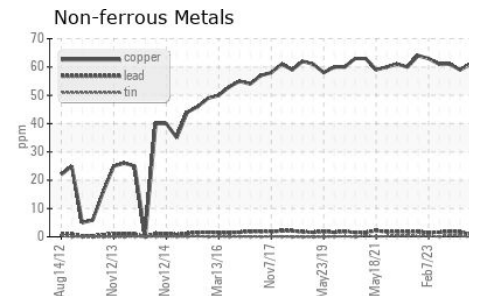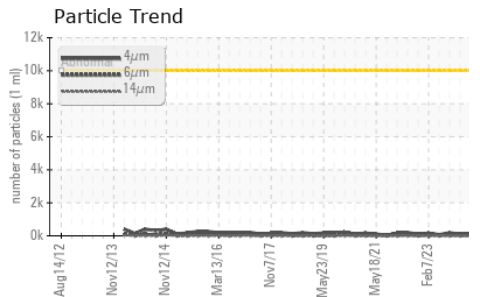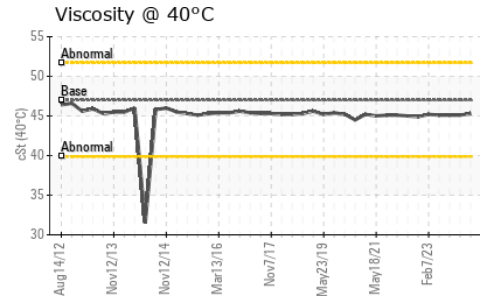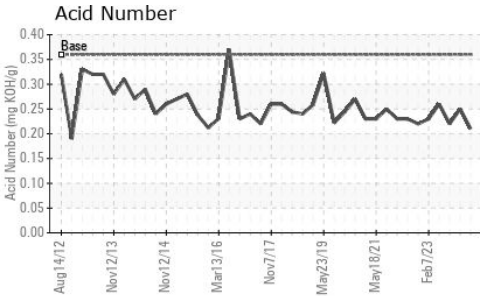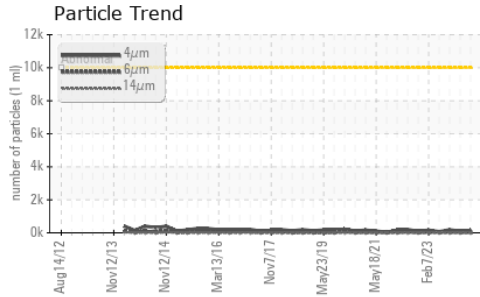


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.36	0.21	0.25	0.22






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.99	45.3	45.1	45.1

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

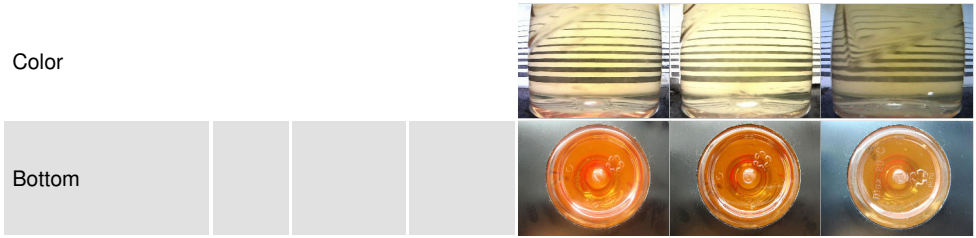

GRAPHS

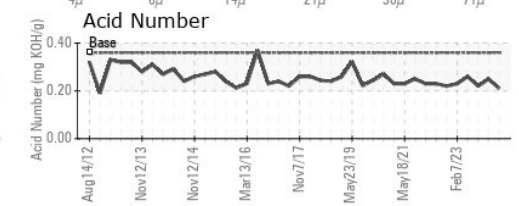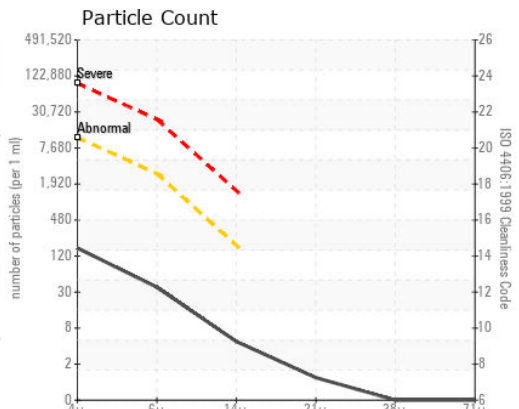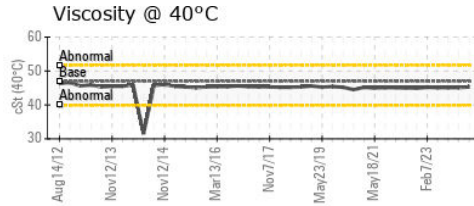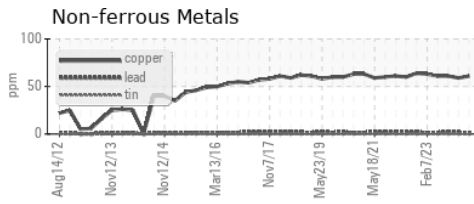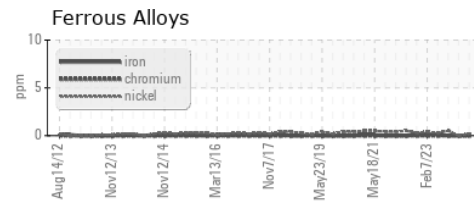

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC
Lab Number : 02641429
Unique Number : 5798968
Test Package : IND 2
Received : 12 Jun 2024
Tested : 13 Jun 2024
Diagnosed : 13 Jun 2024 - Kevin Marson

Bear Creek (Regional Power)
 2557 Miles Rd.
 Roberts Creek, BC
 CA V0N 2W4
 Contact: James Florence
 jflorance@cclinfrasturcture.com
 T: (604)741-8188
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.