



OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id
MTU C4-A
 Component
Transmission
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where dirt can enter the system. We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate concentration of dirt present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The fluid is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0940233	---	---
Sample Date	Client Info		08 Jun 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >200	17	---	---
Chromium	ppm	ASTM D5185(m) >10	0	---	---
Nickel	ppm	ASTM D5185(m)	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >50	2	---	---
Lead	ppm	ASTM D5185(m) >50	0	---	---
Copper	ppm	ASTM D5185(m) >200	1	---	---
Tin	ppm	ASTM D5185(m) >10	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	86	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	---	---
Manganese	ppm	ASTM D5185(m)	2	---	---
Magnesium	ppm	ASTM D5185(m)	2	---	---
Calcium	ppm	ASTM D5185(m)	28	---	---
Phosphorus	ppm	ASTM D5185(m)	181	---	---
Zinc	ppm	ASTM D5185(m)	7	---	---
Sulfur	ppm	ASTM D5185(m)	720	---	---
Lithium	ppm	ASTM D5185(m)	1	---	---

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	▲ 55	---	---
Sodium	ppm	ASTM D5185(m)	10	---	---
Potassium	ppm	ASTM D5185(m) >20	3	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.69	---	---



OIL ANALYSIS REPORT

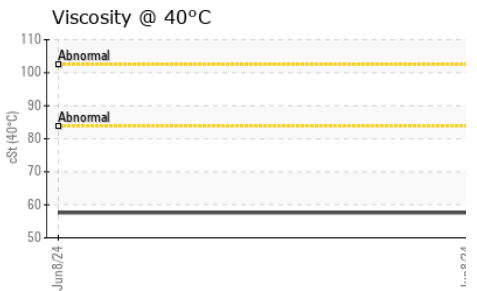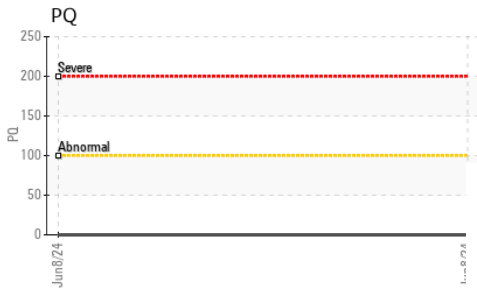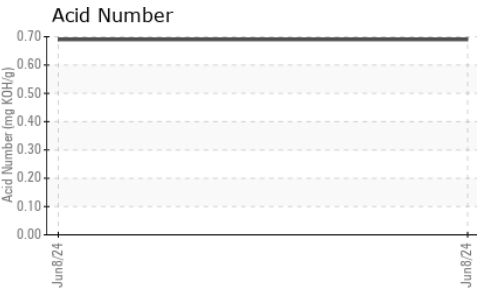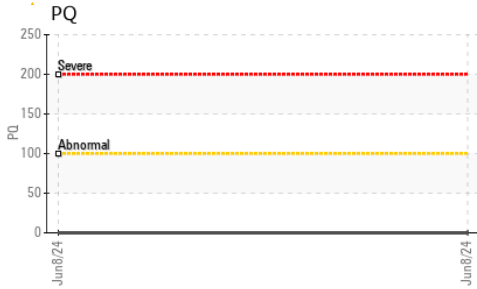









VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	57.6	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

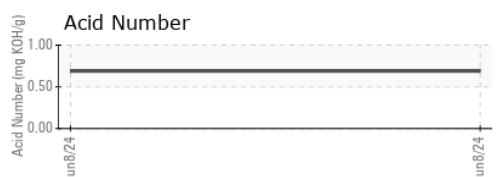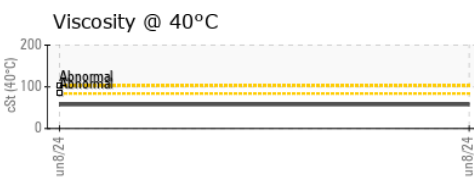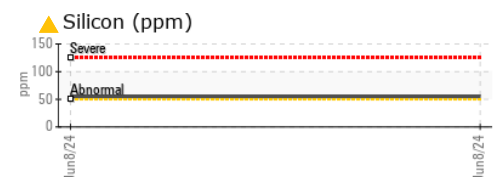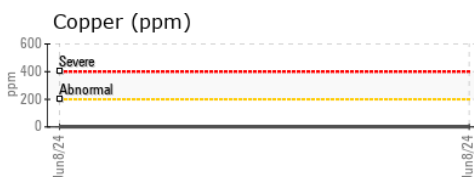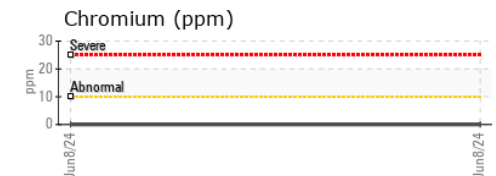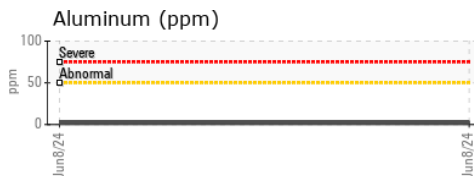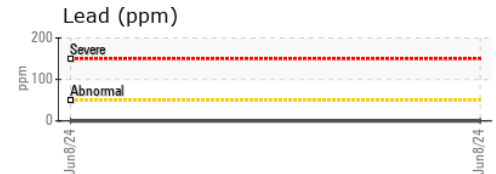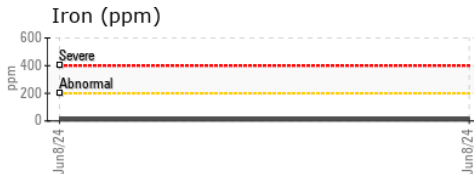

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0940233 **Received** : 12 Jun 2024
Lab Number : 02641452 **Tested** : 13 Jun 2024
Unique Number : 5798991 **Diagnosed** : 13 Jun 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: PQ)

TransitNext M&R Inc
 3110 Albion Road North
 Ottawa, ON
 CA K1V 9V9
 Contact: Glenn Skilton
 Glenn.Skilton@atkinsrealis.com
 T: (613)907-7100
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.