




# OIL ANALYSIS REPORT

Sample Rating Trend

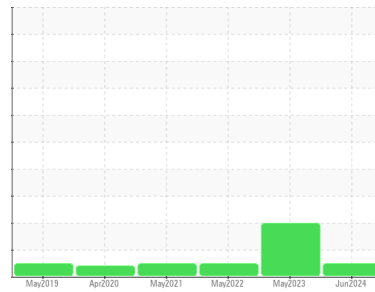

**NORMAL**



Machine Id  
**ERMAK POWERBEND PRO EM023294 (S/N 10785-KWPEFW)**  
 Component  
**Top Hydraulic System**  
 Fluid  
**CHEVRON HYDRAULIC OIL AW ISO 46 (200 LTR)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0806199</b>   | WC0773360   | WC0669665   |
| Sample Date   | Client Info |             | <b>03 Jun 2024</b> | 09 May 2023 | 13 May 2022 |
| Machine Age   | hrs         | Client Info | <b>16958</b>       | 15593       | 13900       |
| Oil Age       | hrs         | Client Info | <b>6858</b>        | 5493        | 3800        |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | N/A         | Not Chngd   |
| Sample Status |             |             | <b>NORMAL</b>      | ABNORMAL    | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Iron      | ppm    | ASTM D5185(m) >20 | <b>0</b>     | <1       | <1       |
| Chromium  | ppm    | ASTM D5185(m) >10 | <b>0</b>     | <1       | <1       |
| Nickel    | ppm    | ASTM D5185(m) >10 | <b>0</b>     | 0        | 0        |
| Titanium  | ppm    | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Silver    | ppm    | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Aluminum  | ppm    | ASTM D5185(m) >10 | <b>0</b>     | 0        | 0        |
| Lead      | ppm    | ASTM D5185(m) >10 | <b>0</b>     | <1       | 0        |
| Copper    | ppm    | ASTM D5185(m) >75 | <b>&lt;1</b> | <1       | <1       |
| Tin       | ppm    | ASTM D5185(m) >10 | <b>0</b>     | 0        | <1       |
| Antimony  | ppm    | ASTM D5185(m)     | <b>0</b>     | <1       | 0        |
| Vanadium  | ppm    | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Beryllium | ppm    | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Cadmium   | ppm    | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base    | current      | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) | <b>0</b>     | 0        | <1       |
| Barium     | ppm    | ASTM D5185(m) | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185(m) | <b>0</b>     | 0        | 0        |
| Manganese  | ppm    | ASTM D5185(m) | <b>0</b>     | 0        | 0        |
| Magnesium  | ppm    | ASTM D5185(m) | <b>&lt;1</b> | 0        | 0        |
| Calcium    | ppm    | ASTM D5185(m) | <b>41</b>    | 37       | 38       |
| Phosphorus | ppm    | ASTM D5185(m) | <b>326</b>   | 356      | 351      |
| Zinc       | ppm    | ASTM D5185(m) | <b>409</b>   | 398      | 412      |
| Sulfur     | ppm    | ASTM D5185(m) | <b>668</b>   | 704      | 706      |
| Lithium    | ppm    | ASTM D5185(m) | <b>&lt;1</b> | <1       | <1       |

## CONTAMINANTS






|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | 0        | 0        |
| Sodium    | ppm    | ASTM D5185(m)     | <b>0</b>     | <1       | <1       |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>0</b>     | <1       | <1       |

## FLUID CLEANLINESS

|                 | method       | limit/base | current         | history1   | history2 |
|-----------------|--------------|------------|-----------------|------------|----------|
| Particles >4µm  | ASTM D7647   | >5000      | <b>1647</b>     | ▲ 10021    | 1455     |
| Particles >6µm  | ASTM D7647   | >1300      | <b>514</b>      | ▲ 3447     | 330      |
| Particles >14µm | ASTM D7647   | >160       | <b>35</b>       | ▲ 372      | 19       |
| Particles >21µm | ASTM D7647   | >40        | <b>9</b>        | ▲ 92       | 4        |
| Particles >38µm | ASTM D7647   | >10        | <b>1</b>        | 2          | 0        |
| Particles >71µm | ASTM D7647   | >3         | <b>0</b>        | 0          | 0        |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14  | <b>18/16/12</b> | ▲ 21/19/16 | 18/16/11 |



# OIL ANALYSIS REPORT

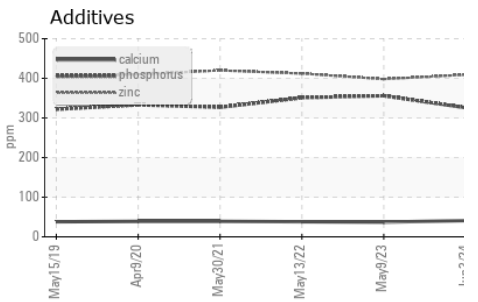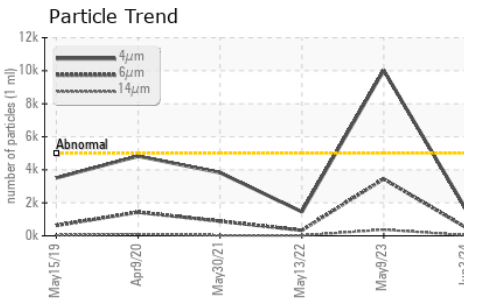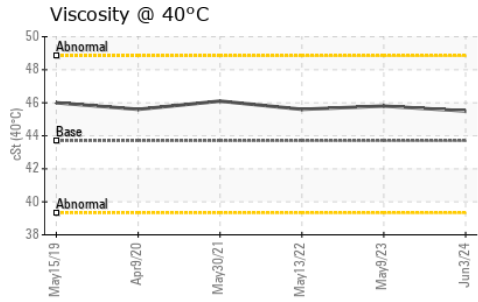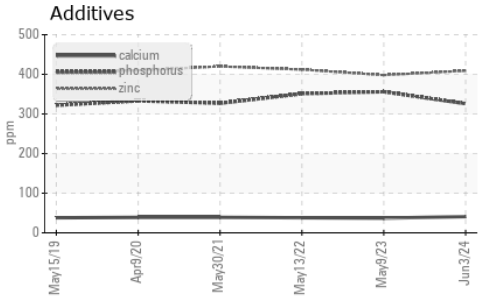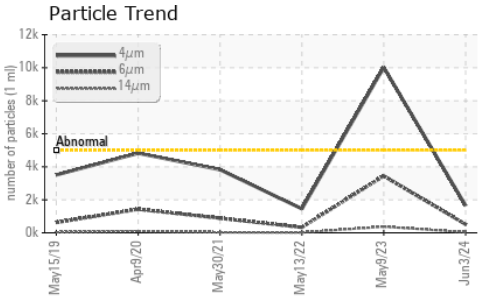


| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D974* |            | <b>0.41</b> | ---      | ---      |






| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Sand/Dirt        | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | Visual* | >0.1       | <b>NEG</b>   | NEG      | .2%      |
| Free Water       | scalar | Visual* |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES |     | method        | limit/base | current     | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 40°C      | cSt | ASTM D7279(m) | 43.7       | <b>45.5</b> | 45.8     | 45.6     |

| SAMPLE IMAGES |  | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

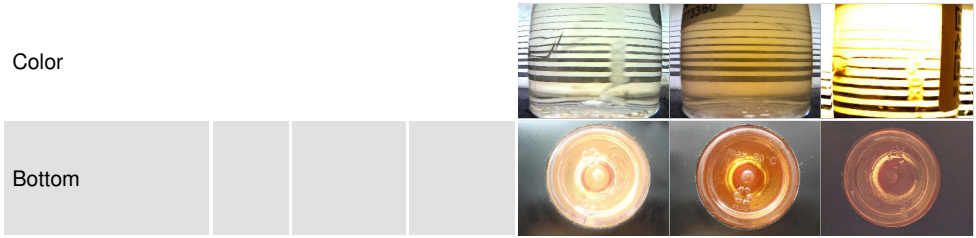

## GRAPHS

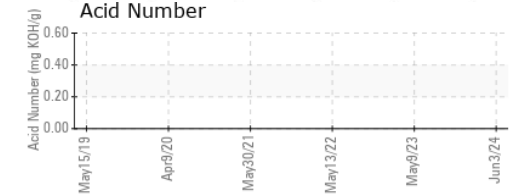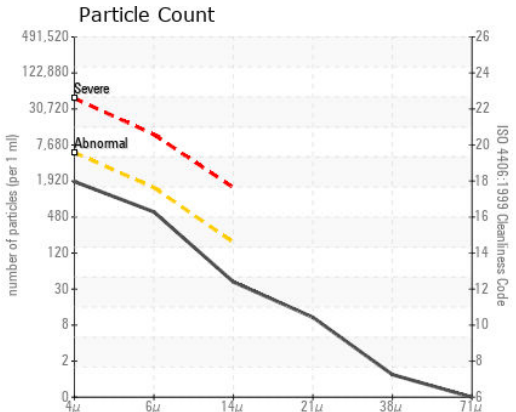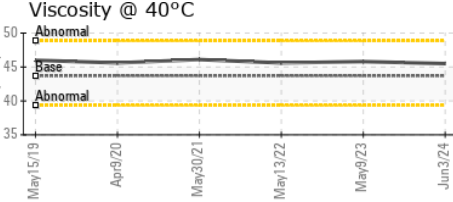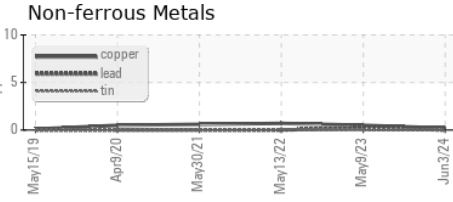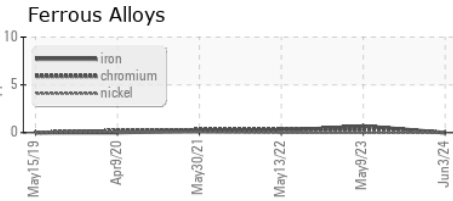

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0806199      **Received** : 13 Jun 2024  
**Lab Number** : **02641699**      **Tested** : 14 Jun 2024  
**Unique Number** : 5799238      **Diagnosed** : 14 Jun 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: TAN Auto, TAN Man )

**SUPREME INTERNATIONAL**  
 BOX 6450  
 WETASKIWIN, AB  
 CA T9A 2G2  
 Contact: LORNE EHLERT  
 lehlert@supremeinternational.com  
 T: (780)352-6061  
 F: (780)352-6056

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.