




# GREASE ANALYSIS

Sample Rating Trend

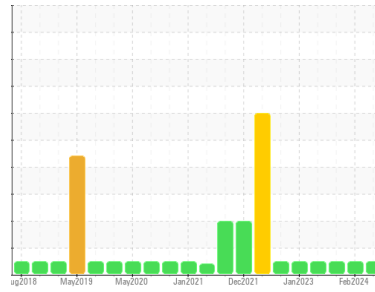

**NORMAL**



Area  
 Machine Id  
**Materials Handling/SE Pedestal Crane**  
**WPD471261 CRANE PEDESTAL SOUTH EAST**  
 Component  
**180° Grease**  
 Fluid  
**MOBIL MOBILGREASE XHP 222 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Grease Condition

The condition of the grease is acceptable for the time in service.

### Contaminants

There is no indication of any contamination in the grease.

## SAMPLE INFORMATION

|                 | method      | limit/base  | current            | history1    | history2    |
|-----------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number   | Client Info |             | <b>PP13994631</b>  | PP13961812  | PP13897520  |
| Sample Date     | Client Info |             | <b>26 May 2024</b> | 16 Feb 2024 | 01 Jul 2023 |
| Machine Age     | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Grease Age      | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Grease Serviced | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status   |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method      | limit/base    | current    | history1     | history2 |    |
|----------|-------------|---------------|------------|--------------|----------|----|
| PQ       | ASTM D8184* | >200          | <b>130</b> | 60           | 17       |    |
| Iron     | ppm         | ASTM D5185(m) | >250       | <b>24</b>    | 10       | 10 |
| Chromium | ppm         | ASTM D5185(m) | >10        | <b>0</b>     | 0        | 0  |
| Nickel   | ppm         | ASTM D5185(m) | >5         | <b>0</b>     | 0        | 0  |
| Cadmium  | ppm         | ASTM D5185(m) |            | <b>0</b>     | 0        | 0  |
| Titanium | ppm         | ASTM D5185(m) |            | <b>&lt;1</b> | 0        | 0  |
| Vanadium | ppm         | ASTM D5185(m) |            | <b>0</b>     | 0        | 0  |
| Lead     | ppm         | ASTM D5185(m) | >25        | <b>&lt;1</b> | 4        | 0  |
| Copper   | ppm         | ASTM D5185(m) | >75        | <b>&lt;1</b> | <1       | <1 |
| Tin      | ppm         | ASTM D5185(m) | >5         | <b>0</b>     | 0        | 0  |
| Silver   | ppm         | ASTM D5185(m) | >5         | <b>0</b>     | 0        | 0  |

## ADDITIVES

|            | method | limit/base    | current | history1     | history2 |     |
|------------|--------|---------------|---------|--------------|----------|-----|
| Boron      | ppm    | ASTM D5185(m) |         | <b>10</b>    | 10       | 9   |
| Magnesium  | ppm    | ASTM D5185(m) |         | <b>6</b>     | 2        | 1   |
| Manganese  | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 0        | 0   |
| Molybdenum | ppm    | ASTM D5185(m) |         | <b>57</b>    | 59       | 49  |
| Phosphorus | ppm    | ASTM D5185(m) |         | <b>88</b>    | 101      | 115 |
| Zinc       | ppm    | ASTM D5185(m) |         | <b>206</b>   | 188      | 191 |
| Antimony   | ppm    | ASTM D5185(m) |         | <b>11</b>    | 9        | 9   |

## THICKENER/SOAP

|          | method | limit/base    | current | history1     | history2 |     |
|----------|--------|---------------|---------|--------------|----------|-----|
| Aluminum | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | <1       | <1  |
| Barium   | ppm    | ASTM D5185(m) |         | <b>2</b>     | <1       | <1  |
| Calcium  | ppm    | ASTM D5185(m) |         | <b>38</b>    | 19       | 19  |
| Sodium   | ppm    | ASTM D5185(m) |         | <b>19</b>    | 11       | 5   |
| Lithium  | ppm    | ASTM D5185(m) |         | <b>237</b>   | 224      | 209 |
| Sulfur   | ppm    | ASTM D5185(m) |         | <b>729</b>   | 755      | 737 |


## CONTAMINANTS

|           | method | limit/base    | current | history1 | history2 |    |
|-----------|--------|---------------|---------|----------|----------|----|
| Silicon   | ppm    | ASTM D5185(m) | >150    | <b>1</b> | 0        | <1 |
| Potassium | ppm    | ASTM D5185(m) |         | <b>2</b> | <1       | <1 |

## GREASE CONDITION




|                  | method     | limit/base    | current        | history1    | history2    |
|------------------|------------|---------------|----------------|-------------|-------------|
| Grease Color     | Visual*    | Dk Blue       | <b>Green</b>   | Green       | Green       |
| Texture          | In-house*  |               | <b>Buttery</b> | Short fiber | Short fiber |
| NLGI Consistency | NLGI Scale | SKF Method* 2 | <b>2-3</b>     | 1-2         | 1-2         |

# GREASE ANALYSIS

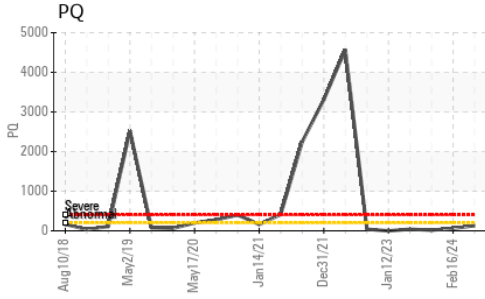

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         |          |          |
| Bottom        |        |            |         |          |          |
| PrtFilter     |        |            |         |          |          |

## GRAPHS

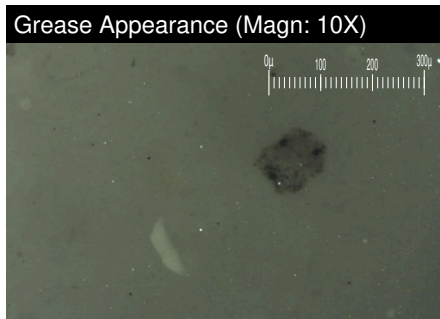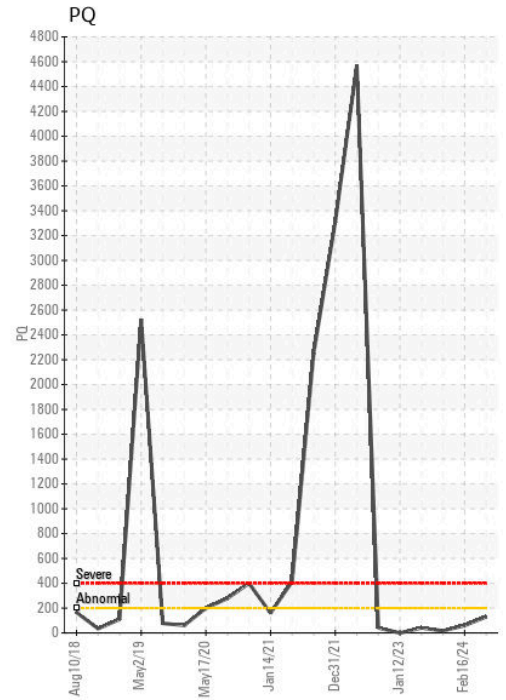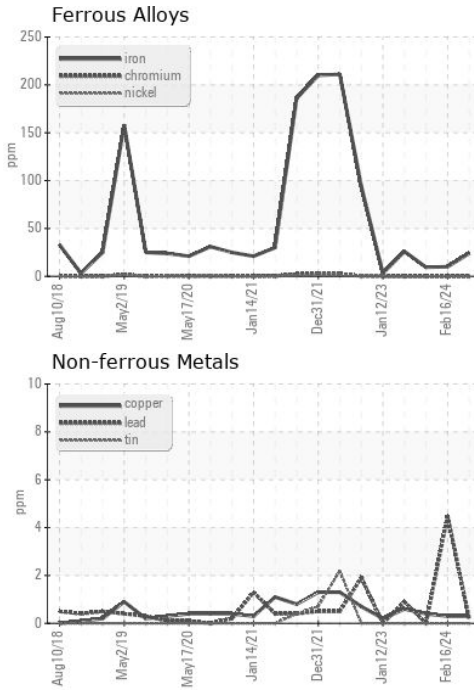

**CALA**  
ACCREDITED LABORATORY  
 ISO 17025:2017  
 Accredited  
 Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PP13994631      **Received** : 13 Jun 2024  
**Lab Number** : **02641882**      **Tested** : 24 Jun 2024  
**Unique Number** : 5799421      **Diagnosed** : 24 Jun 2024 - Bill Quesnel  
**Test Package** : GRS 1 ( Additional Tests: BottomAnalysis )

**ExxonMobil Canada East Ltd.**  
 Hebron-Materials and Repair Coordin, Suite 1000, 100 New Gow  
 St. John`s, NL  
 CA A1C 6K3  
 Contact: Liam Maher  
 liam.m.maher@exxonmobil.com  
 T: (709)273-3729  
 F:

*To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.*