




# OIL ANALYSIS REPORT

Sample Rating Trend

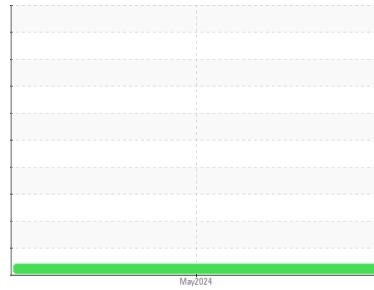

VISCOSITY



Machine Id

## Temsa 2301

Component

### Diesel Engine

Fluid

### DIESEL ENGINE OIL SAE 10W30 (40)

#### DIAGNOSIS

##### ▲ Recommendation

Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

##### Contaminants

There is no indication of any contamination in the oil.

##### ▲ Oil Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 40 range, advise investigate. The condition of the oil is suitable for further service.

#### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0939765</b>	---	---
Sample Date	Client Info		<b>29 May 2024</b>	---	---
Machine Age	hrs	Client Info	<b>22843</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

#### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

#### WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m) >100	<b>72</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >20	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>5</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

#### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	<b>76</b>	---	---
Barium	ppm	ASTM D5185(m) 10	<b>5</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 100	<b>63</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185(m) 450	<b>410</b>	---	---
Calcium	ppm	ASTM D5185(m) 3000	<b>1713</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	<b>928</b>	---	---
Zinc	ppm	ASTM D5185(m) 1350	<b>1102</b>	---	---
Sulfur	ppm	ASTM D5185(m) 4250	<b>2544</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

#### CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>10</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>5</b>	---	---

#### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0.2</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>7.9</b>	---	---
Sulfation	Abs.1mm	ASTM D7415* >30	<b>20.2</b>	---	---



# OIL ANALYSIS REPORT






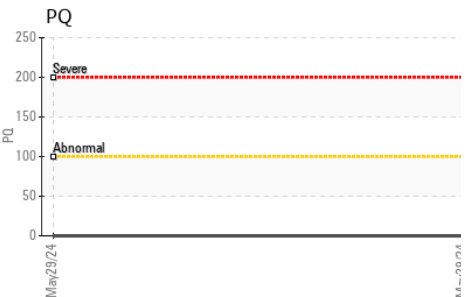
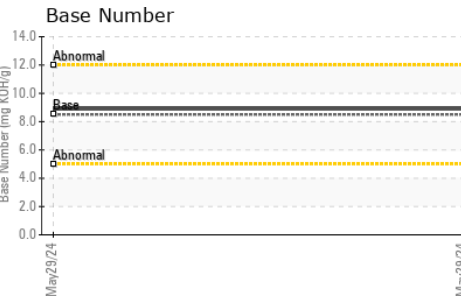
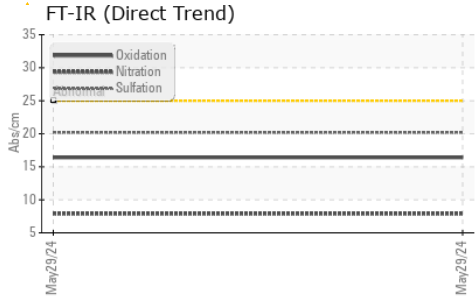


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>16.4</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	8.5	<b>8.90</b>	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>▲ 14.3</b>	---	---

## GRAPHS

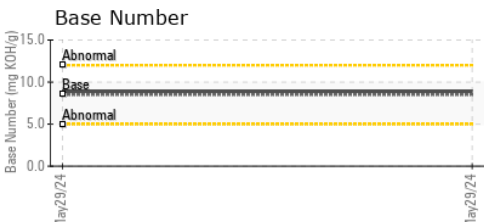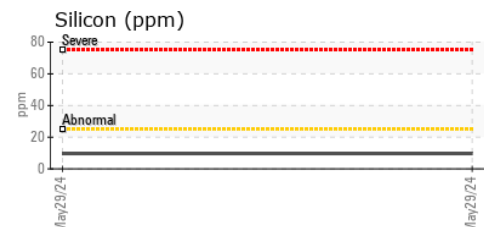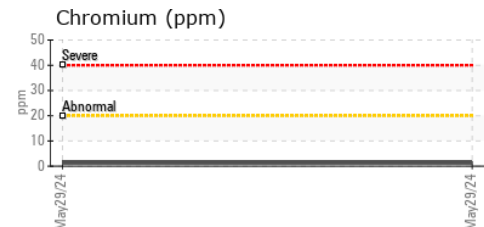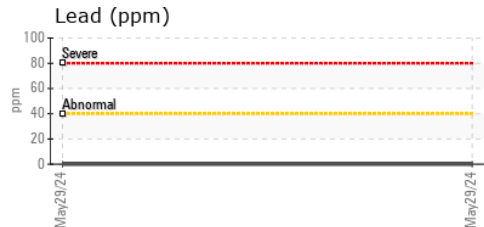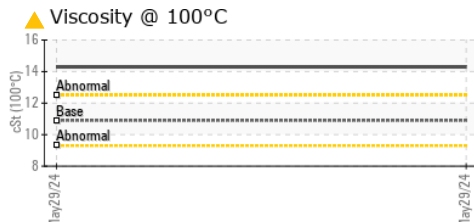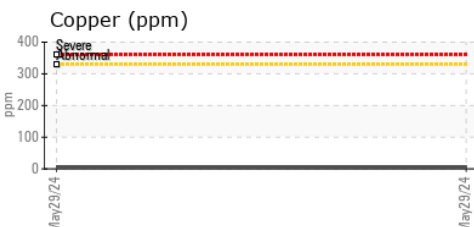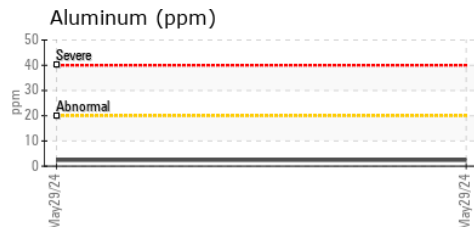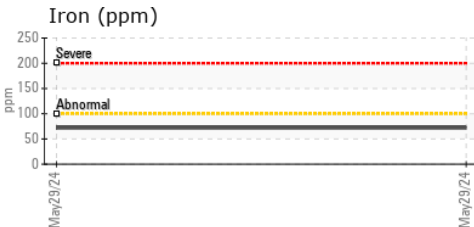

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0939765 **Received** : 14 Jun 2024  
**Lab Number** : **02641937** **Tested** : 17 Jun 2024  
**Unique Number** : 5799476 **Diagnosed** : 17 Jun 2024 - Kevin Marson  
**Test Package** : MOB 3

**ONTARIO NORTHLAND GARAGE**  
 567 WALLACE RD  
 NORTH BAY, ON  
 CA P1A 3T3  
 Contact: Alexandra Pavone  
 Alexandra.Pavone@ontarionorthland.ca  
 T: (705)472-4500  
 F: (705)475-5028

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.



# FERROGRAPHY REPORT

Machine Id



## Temsa 2301

Component

### Diesel Engine

Fluid

### DIESEL ENGINE OIL SAE 10W30 (40)

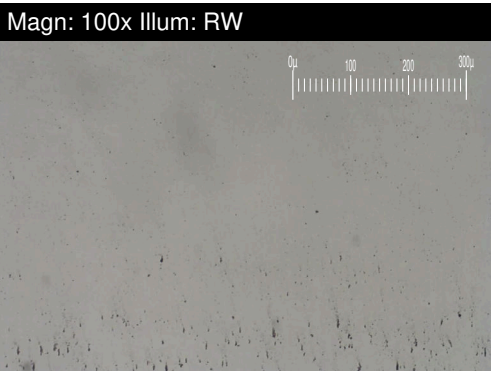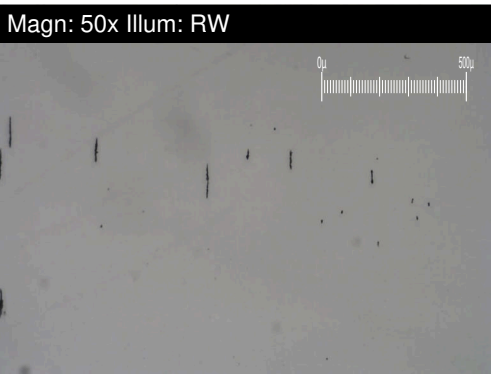


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		13.0	---	---
Small Particles		DR-Ferr*		6.7	---	---
Total Particles		DR-Ferr*	>---	19.7	---	---
Large Particles Percentage	%	DR-Ferr*		32	---	---
Severity Index		DR-Ferr*		82	---	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		2		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		2		

### WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

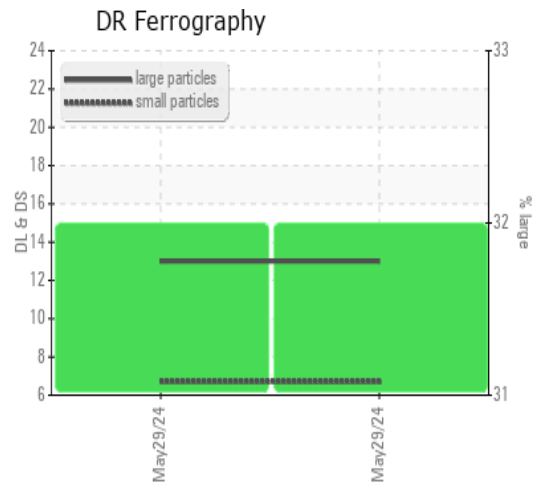

*This page left intentionally blank*