



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Area
Crown Cork & Seal - C1600
 Machine Id
A2406088
 Component
Unknown Component
 Fluid
GEAR OIL ISO 150 (--- GAL)

DIAGNOSIS

Recommendation
 We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

Wear
 Aluminum ppm levels are noted.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Batch #	Client Info		2024 05 0800	---	---
Department	Client Info		Production	---	---
Sample From	Client Info		Machine	---	---
Production Stage	Client Info		Final	---	---
Sent to WC	Client Info		06/12/2024	---	---
Sample Number	Client Info		E30002384	---	---
Sample Date	Client Info		12 Jun 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	2	---	---
Chromium	ppm	ASTM D5185(m)	0	---	---
Nickel	ppm	ASTM D5185(m)	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m)	33	---	---
Lead	ppm	ASTM D5185(m)	0	---	---
Copper	ppm	ASTM D5185(m)	2	---	---
Tin	ppm	ASTM D5185(m)	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---






ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	1	---	---
Barium	ppm	ASTM D5185(m) 15	0	---	---
Molybdenum	ppm	ASTM D5185(m) 15	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m) 50	8	---	---
Calcium	ppm	ASTM D5185(m) 50	11	---	---
Phosphorus	ppm	ASTM D5185(m) 350	342	---	---
Zinc	ppm	ASTM D5185(m) 100	11	---	---
Sulfur	ppm	ASTM D5185(m) 12500	14247	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1	---	---
Sodium	ppm	ASTM D5185(m)	5	---	---
Potassium	ppm	ASTM D5185(m) >20	<1	---	---
Water	%	ASTM D6304*	0.006	---	---
ppm Water	ppm	ASTM D6304*	62	---	---

OIL ANALYSIS REPORT

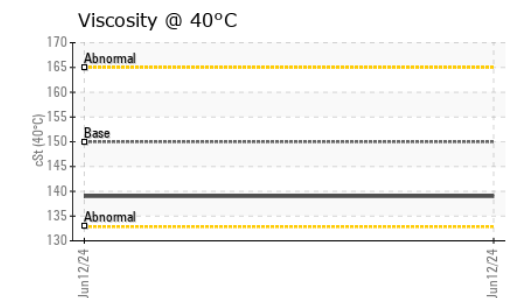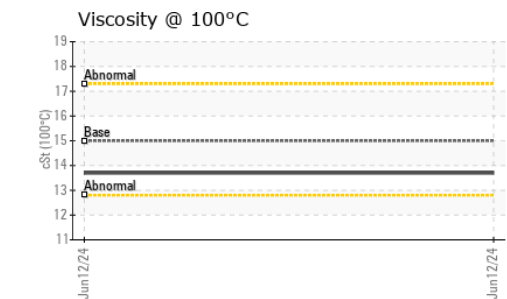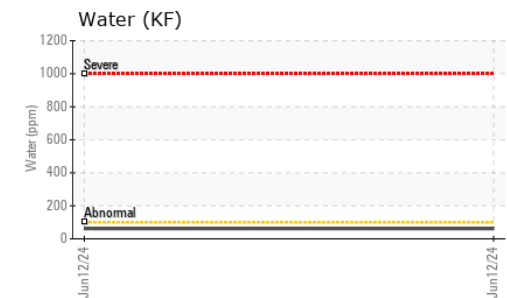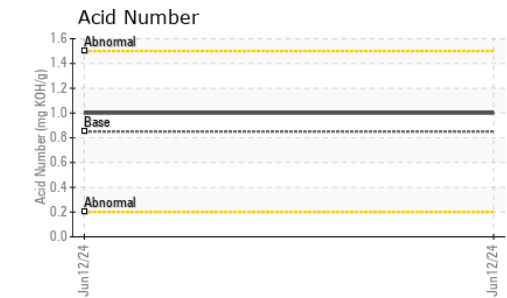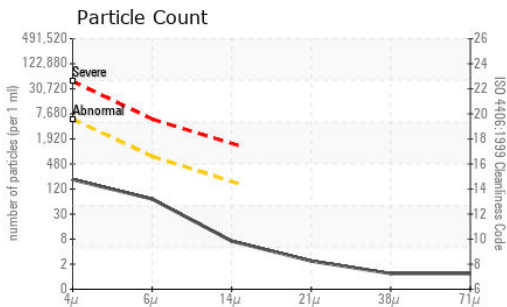

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	178	---	---
Particles >6µm	ASTM D7647	>640	61	---	---
Particles >14µm	ASTM D7647	>160	6	---	---
Particles >21µm	ASTM D7647	>40	2	---	---
Particles >38µm	ASTM D7647	>10	1	---	---
Particles >71µm	ASTM D7647	>3	1	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	15/13/10	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	1.00	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*		NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	150	139	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	13.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	99	93	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30002384
Lab Number : **02642007**
Unique Number : 5799546
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Tatiana Sorkina
 tsorkina@e360s.ca
 T: (800)263-3939
 F: (905)373-4950

Received : 14 Jun 2024
 Tested : 17 Jun 2024
 Diagnosed : 17 Jun 2024 - Tatiana Sorkina
 To discuss this sample report, contact Customer Service at 1-905-372-2251.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.