


# **OIL ANALYSIS REPORT**

Sample Rating Trend

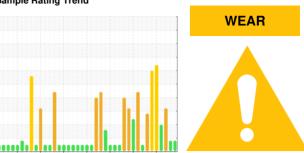

Machine Id

# **DSC194 HERK WAY LUBE**

**Gear Lube System** 

Fluid

{not provided} (--- GAL)

## DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## Wear

Iron ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

### Contamination

There is no indication of any contamination in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number	717 (11014	Client Info	III III DAGC	WC0931159	WC0780545	WC0813572
Sample Date		Client Info		11 Jun 2024	21 Apr 2024	28 Feb 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	1110	Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATION	VI	method	limit/base	current	history1	history2
Water	•	WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		30	28	30
Iron	ppm	ASTM D5185(m)	>150	<u> </u>	<u>△</u> 179	△ 176
Chromium	ppm	ASTM D5185(m)	>100	<1	<1	<1
Nickel	ppm	ASTM D5185(m)		2	2	2
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	0	0	<1
Lead	ppm	ASTM D5185(m)	>100	0	0	0
Copper	ppm	ASTM D5185(m)	>50	2	2	2
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Antimony	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		2	2	1
Magnesium	ppm	ASTM D5185(m)		2	2	2
Calcium	ppm	ASTM D5185(m)		6	5	4
Phosphorus	ppm	ASTM D5185(m)		11	11	12
Zinc	ppm	ASTM D5185(m)		2	1	1
Sulfur	ppm	ASTM D5185(m)		2900	2915	3142
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	4	3	4
Sodium	ppm	ASTM D5185(m)		10	9	9
Potassium	ppm	ASTM D5185(m)	>20	3	3	3
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.09	0.07	0.08



## **OIL ANALYSIS REPORT**

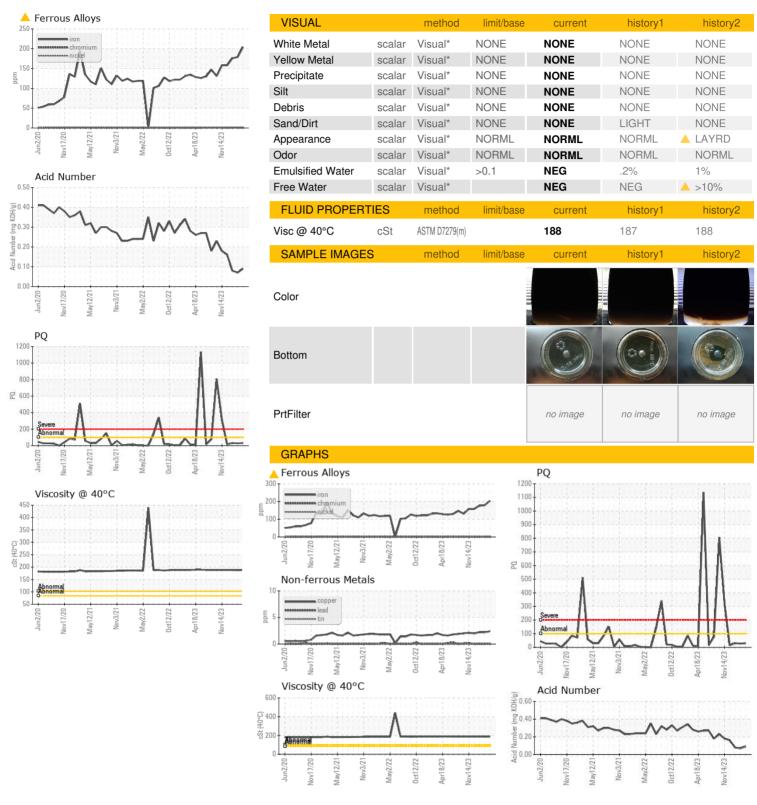



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number Unique Number : 5799651

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 ALGOMA STEEL INC. - STORES DEPT. : 02642112

: WC0931159

Received **Tested** Diagnosed

: 14 Jun 2024 Test Package : IND 2 ( Additional Tests: TAN Man )

: 17 Jun 2024 - Kevin Marson

: 14 Jun 2024

**CA P6C 1K8** Contact: Algoma Reliability algomareliability@algoma.com T: (705)206-1059

301 WALLACE TERRACE

SAULT STE MARIE, ON

F: (705)945-3585

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.