

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area EAST CRANE [MH-9163A] 170831 (S/N MH-9163A)

3 Slewing Gearbox Fluid GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | | Sep2022 | Mar2023 | Jun2023 Apr2024 | Jun2024 | |
|----------------------------|------------|--------------------------------|------------|-------------------|------------------|-------------------|
| SAMPLE INFORM | AATION | method | limit/base | | | history? |
| | | | iimi/base | | history1 | history2 |
| Sample Number | | Client Info Client Info | | PP 13 Jun 2024 | PP | PP 26 Jun 2023 |
| Sample Date Machine Age | hrs | Client Info | | 13 Jun 2024 0 | 18 Apr 2024 0 | 26 Juli 2023 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | 1110 | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184* | | 0 | 0 | 0 |
| Iron | ppm | ASTM D5185(m) | >50 | 13 | 10 | 12 |
| Chromium | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >10 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | | <1 | <1 | 1 |
| Lead | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) | | 18 | 14 | 16 |
| Tin | ppm | ASTM D5185(m) | | <1 | <1 | 1 |
| Antimony | ppm | ASTM D5185(m) | >5 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium Cadmium | ppm ppm | ASTM D5185(m) ASTM D5185(m) | | 0 | 0 | 0 |
| | ррпі | | | | | |
| ADDITIVES | | method | limit/base | | history1 | history2 |
| Boron | ppm | ASTM D5185(m) | 400 | 291 | 281 | 315 |
| Barium Molybdenum | ppm | ASTM D5185(m) ASTM D5185(m) | 200 12 | 0 | 0 | 0 |
| Manganese | ppm ppm | ASTM D5185(m) | 12 | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185(m) | 12 | 18 | 18 | 95 |
| Calcium | ppm | ASTM D5185(m) | 150 | 2 | 2 | 6 |
| Phosphorus | ppm | ASTM D5185(m) | 1650 | - 1375 | 1345 | 1432 |
| Zinc | ppm | ASTM D5185(m) | 125 | 6 | 5 | 6 |
| Sulfur | ppm | ASTM D5185(m) | 22500 | 22404 | 22348 | 22577 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185(m) | >25 | <1 | <1 | 3 |
| Sodium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | <1 | <1 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D974* | 2.00 | 2.12 | 2.13 | 2.21 |



OIL ANALYSIS REPORT

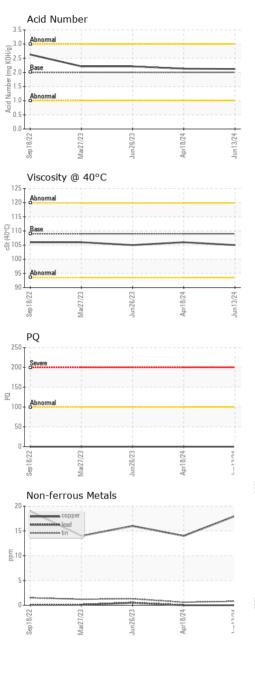

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------------------|------------|-------------------------|-------------------|----------------|-----------------|-----------------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | VLITE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | VLITE |
| Debris | scalar | Visual* | NONE | NONE | VLITE | VLITE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |
| | | | | | | |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| FLUID PROPERT Visc @ 40°C | IES cSt | method ASTM D7279(m) | limit/base 109 | current 105 | history1 106 | history2 105 |
| | cSt | | | | | |
| Visc @ 40°C | cSt | ASTM D7279(m) | 109 | 105 | 106 | 105 |

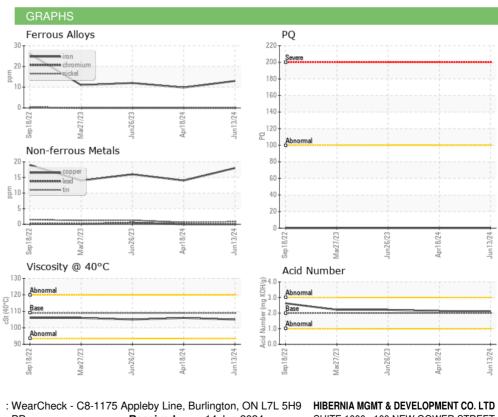

Laboratory CALA SUITE 1000,, 100 NEW GOWER STREET Sample No. : PP Received : 14 Jun 2024 Lab Number : 02642122 Tested : 18 Jun 2024 ST.JOHNS, NL ISO 17025:2017 Accredited Laboratory Diagnosed Unique Number : 5799661 : 18 Jun 2024 - Kevin Marson CA A1C 6K3 Test Package : IND 2 (Additional Tests: TAN Man) Contact: Sam Nash To discuss this sample report, contact Customer Service at 1-800-268-2131. samantha.m.nash@exxonmobil.com Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T: F: (709)722-3766 Validity of results and interpretation are based on the sample and information as supplied.

Report Id: HIBSTJ [WCAMIS] 02642122 (Generated: 06/18/2024 15:53:30) Rev: 1

Contact/Location: Sam Nash - HIBSTJ Page 2 of 2