

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area **EAST CRANE [M9132B]** 170832 AGG #2

Distribution Gear Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC	PP	
Sample Date		Client Info		13 Jun 2024	14 Dec 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>200	0	1	
Iron	ppm	ASTM D5185(m)	>185	17	20	
Chromium	ppm	ASTM D5185(m)	>5	0	0	
Nickel	ppm	ASTM D5185(m)	>10	0	<1	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	<1	
Aluminum	ppm	ASTM D5185(m)	>10	0	<1	
Lead	ppm	ASTM D5185(m)	>35	0	<1	
Copper	ppm	ASTM D5185(m)	>35	11	13	
Tin	ppm	ASTM D5185(m)	>5	0	0	
Antimony	ppm	ASTM D5185(m)	>5	0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		3	2	
Barium	ppm	ASTM D5185(m)		1	1	
Molybdenum	ppm	ASTM D5185(m)		0	0	
Manganese	ppm	ASTM D5185(m)		<1	<1	
Magnesium	ppm	ASTM D5185(m)		<1	0	
Calcium	ppm	ASTM D5185(m)		4	6	
Phosphorus	ppm	ASTM D5185(m)		460	477	
Zinc	ppm	ASTM D5185(m)		70	58	
Sulfur	ppm	ASTM D5185(m)		4821	4951	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>150	9	11	
Sodium	ppm	ASTM D5185(m)		1	1	
Potassium	ppm	ASTM D5185(m)	>20	<1	0	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.74	0.90	



OIL ANALYSIS REPORT

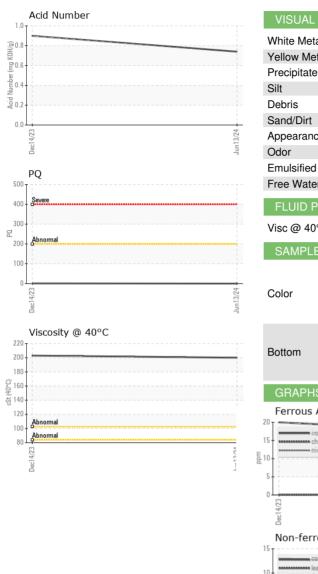

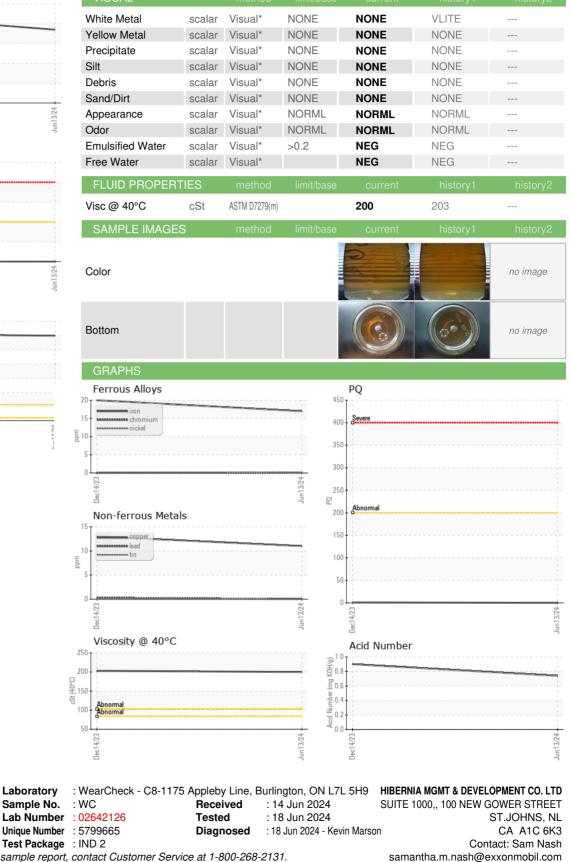

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Report Id: HIBSTJ [WCAMIS] 02642126 (Generated: 06/18/2024 17:09:39) Rev: 1

CALA

ISO 17025:2017 Accredited

Laboratory

Laboratory

Contact/Location: Sam Nash - HIBSTJ Page 2 of 2

T:

F: (709)722-3766