

OIL ANALYSIS REPORT

Area **EAST CRANE** 170832 AGG #2

Luffing Drive Fluid GEAR OIL LS 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Sample Rating Trend

NORMAL


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		wc	PP	PP
Sample Date		Client Info		13 Jun 2024	18 Apr 2024	07 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	0	38
Iron	ppm	ASTM D5185(m)	>200	21	11	88
Chromium	ppm	ASTM D5185(m)	>10	0	0	1
Nickel	ppm	ASTM D5185(m)	>10	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)		<1	0	<1
Lead	ppm	ASTM D5185(m)		0	0	0
Copper	ppm	ASTM D5185(m)		<1	<1	1
Tin	ppm	ASTM D5185(m)		0	0	0
Antimony	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	150	3	2	11
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	10	1	<1	3
Calcium	ppm	ASTM D5185(m)	70	214	77	193
Phosphorus	ppm	ASTM D5185(m)	2000	298	272	392
Zinc	ppm	ASTM D5185(m)	50	5	5	19
Sulfur	ppm	ASTM D5185(m)	20000	21809	21564	21667
Lithium	ppm	ASTM D5185(m)		<1	<1	1
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		1	0	3
Sodium	ppm	ASTM D5185(m)		<1	1	<1
Potassium	ppm	ASTM D5185(m)	>20	0	0	<1
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.71	0.73	0.80



OIL ANALYSIS REPORT

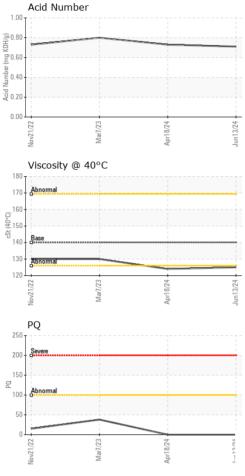

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	140	125	124	130
	cSt	ASTM D7279(m) method	140 limit/base	125 current		
Visc @ 40°C	cSt	()	-	-	124	130

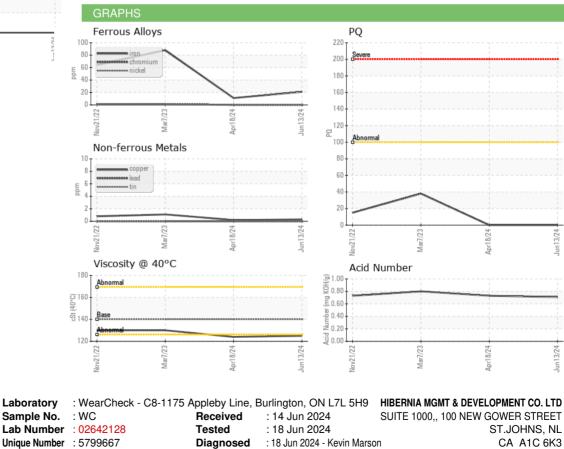



 Test Package
 : IND 2

 To discuss this sample report, contact Customer Service at 1-800-268-2131.

 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

 Validity of results and interpretation are based on the sample and information as supplied.

Report Id: HIBSTJ [WCAMIS] 02642128 (Generated: 06/18/2024 17:09:46) Rev: 1

CALA

ISO 17025:2017 Accredited Laboratory

> Contact/Location: Sam Nash - HIBSTJ Page 2 of 2

samantha.m.nash@exxonmobil.com

Contact: Sam Nash

F: (709)722-3766

T: