




# OIL ANALYSIS REPORT

Sample Rating Trend

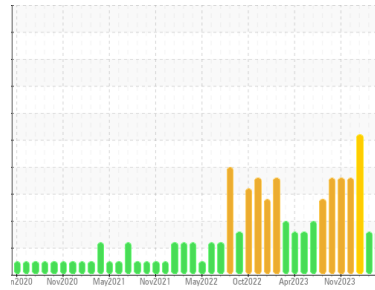

DEGRADATION



Area

Direct Strip Mill/Caster

Machine Id  
**CH1 HYDRAULIC SYSTEM (DSC024) (S/N 1000024394)**

Component

Hydraulic System

Fluid

HOUGHTON HOUGHTON SAFE 616 (3080 LTR)

## DIAGNOSIS

### Recommendation

Due to the low reserve alkalinity it is advised that you contact HOUGHTON to assist in restoring the proper amine concentration. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

### Wear

Component wear rates appear to be normal (unconfirmed).

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The reserve alkalinity of this fluid is lower than acceptable. Viscosity of sample indicates oil is within ISO 32 range, advise investigate. The AN level is acceptable for this fluid. The pH level of this fluid is within the acceptable limits. The water concentration level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0931160</b>	WC0780546	WC0837563
Sample Date	Client Info		<b>11 Jun 2024</b>	16 Apr 2024	29 Feb 2024
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	SEVERE

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)		<b>1</b>	1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Phosphorus	ppm	ASTM D5185(m)		<b>0</b>	<1	1
Zinc	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Sulfur	ppm	ASTM D5185(m)		<b>48</b>	44	59
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185(m)		<b>30</b>	5	26
Potassium	ppm	ASTM D5185(m)	>20	<b>26</b>	0	23
Water	%	ASTM D6304*	>55	<b>44.4</b>	46.4	42.6
ppm Water	ppm	ASTM D6304*	>55000	<b>444000</b>	464000	426000


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	<b>62</b>	246	▲ 3019
Particles >6µm	ASTM D7647	>160	<b>0</b>	79	▲ 1116
Particles >14µm	ASTM D7647	>20	<b>0</b>	22	▲ 151
Particles >21µm	ASTM D7647	>4	<b>0</b>	4	▲ 59
Particles >38µm	ASTM D7647	>3	<b>3</b>	0	2
Particles >71µm	ASTM D7647	>3	<b>2</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>16/14/11	<b>13/7/7</b>	15/13/12	▲ 19/17/14




# OIL ANALYSIS REPORT


### ▲ Reserve Alkalinity

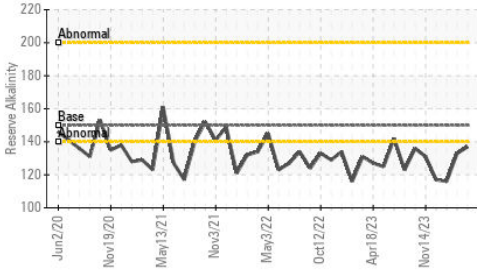


### ▲ Viscosity @ 40°C

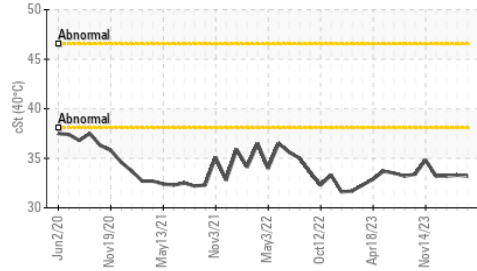


### Particle Count

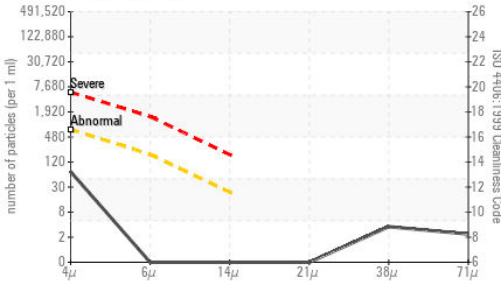

### Acid Number

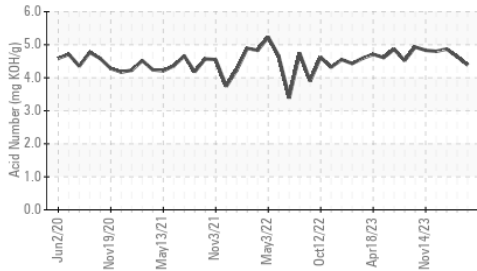

### Water (KF)

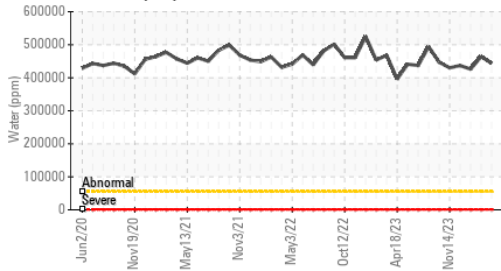


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>4.39</b>	4.64	4.87
Alkiline Reserve (Oils)	ml KOH/g	ASTM D1121*	150	▲ <b>137</b>	▲ 133	▲ 116

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>FRGLY</b>	FRGLY	FRGLY
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>55	<b>NEG</b>	>10%	>10%
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
pH	Scale 0-14	ASTM D1287*		<b>9.52</b>	9.37	9.47
Visc @ 40°C	cSt	ASTM D7279(m)		▲ <b>33.2</b>	▲ 33.3	▲ 33.2

### SAMPLE IMAGES

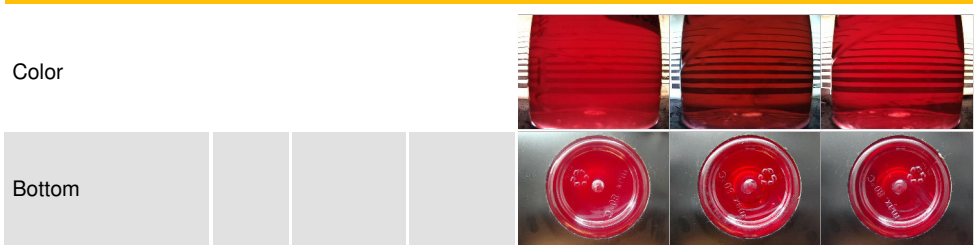

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0931160  
**Lab Number** : **02642160**  
**Unique Number** : 5799699  
**Test Package** : IND 2 ( Additional Tests: KF, pH, ReserveAlk, TAN Man )

**ALGOMA STEEL INC. - STORES DEPT.**  
 301 WALLACE TERRACE  
 SAULT STE MARIE, ON  
 CA P6C 1K8  
 Contact: Algoma Reliability  
 algomareliability@algoma.com  
 T: (705)206-1059  
 F: (705)945-3585

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.