


FUEL REPORT

Sample Rating Trend



Machine Id

BOEING 737-800 C-GLRN

Right Jet Fuel

JET FUEL Type A (--- GAL)

DIAGNOSIS

Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

Contamination

There is no bacteria or fungus (yeast and/or mold) present in the sample. The water content is negligible. The fuel phase was tested for microbes, as there was no separate water phase present in the sample. The MicrobMonitor2 test kit was used to test for microbiological contamination in the sample. There is no indication of any contamination in the jet fuel.


Fluid Condition

All laboratory tests indicate that this sample appears to be Jet Fuel Type A.

		Sep 201	8 Jul2020	May2024 Ju	ın2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0899295	WC0899296	WC0441651
Sample Date		Client Info		13 Jun 2024	28 May 2024	30 Jul 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	1113	Client Info		N/A	N/A	N/A
Sample Status		CHCIII IIIIO		NORMAL	NORMAL	NORMAL
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*		0.807	0.800	0.815
Fuel Color	text	Visual Screen*		Clear	Clear	Yllow
Visc @ 40°C	cSt	ASTM D7279(m)	<8.0	1.4	1.3	1.3
Pensky-Martens Flash Point	°C	ASTM D7215*	38	46	43.1	53
Pour Point	°C	ASTM D97*	-45	-57	-54	-54
SULFUR CONTE	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	<3000	331	242	378
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*		153	151	164
5% Distillation Point	°C	ASTM D2887*		170	165	177
10% Distill Point	°C	ASTM D2887*	205	176	170	180
15% Distillation Point	°C	ASTM D2887*		181	175	183
20% Distill Point	°C	ASTM D2887*		185	179	187
30% Distill Point	°C	ASTM D2887*		193	188	193
40% Distill Point	°C	ASTM D2887*		202	197	200
50% Distill Point	°C	ASTM D2887*		211	207	208
60% Distill Point	°C	ASTM D2887*		219	216	216
70% Distill Point	°C	ASTM D2887*		228	225	224
80% Distill Point	°C	ASTM D2887*		240	237	236
85% Distillation Point	°C	ASTM D2887*		248	245	245
90% Distill Point	°C	ASTM D2887*		257	254	254
95% Distillation Point	°C	ASTM D2887*		271	268	269
Final Boiling Point	°C	ASTM D2887*	300	313	302	297
Distillation Residue	%	ASTM D86(e)*	1.5			
Distillation Loss	%	ASTM D86(e)*	1.5			
IGNITION QUALIT	ΓΥ	method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	44	43	45	
Cetane Index		ASTM D4737*	<40.0	47	48	43
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	0	0	<1
Sodium	ppm	ASTM D5185(m)	<0.1	<1	<1	<1
Potassium	ppm	ASTM D5185(m)	<0.1	0	0	<1
Water	%	ASTM D6304*	< 0.05	0.003	0.003	0.003
ppm Water	ppm	ASTM D6304*	<500	40	32	32.6
MICROBIAL		method	limit/base	current	history1	history2
Microbes	CFU/L	ASTM D6469*	>=100000	0	0	



FUEL REPORT

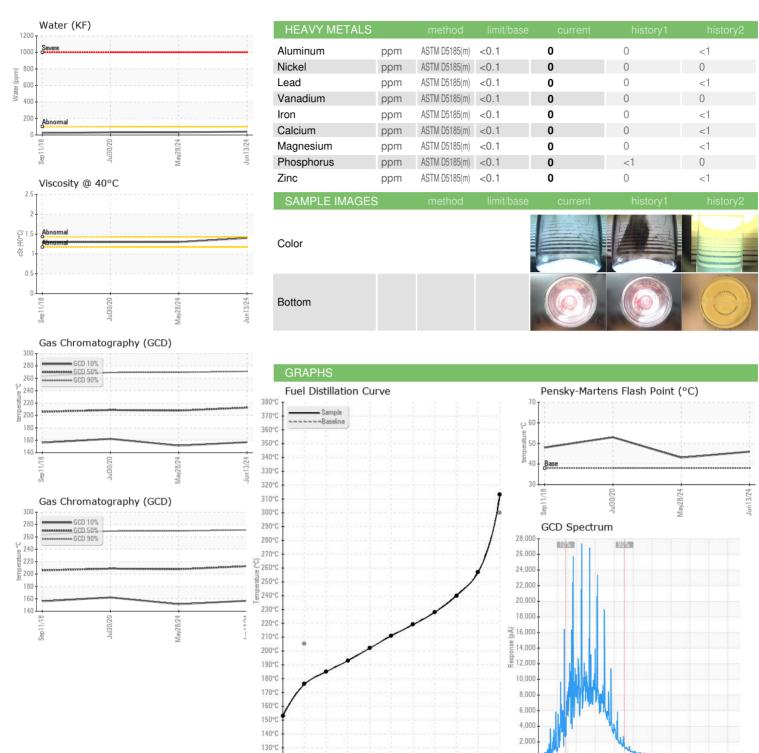





Laboratory

Laboratory

Sample No. Lab Number : 02642170

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0899295

120°C

Unique Number : 5799709

Received **Tested**

Diagnosed : 19 Jun 2024 - Kevin Marson

: 14 Jun 2024

: 19 Jun 2024

Test Package : FUEL (Additional Tests: CC Flash) To discuss this sample report, contact Customer Service at 1-800-268-2131.

20%

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

SUNWING AIRLINES

44 FASKEN DRIVE, UNIT 12/13 ETOBICOKE, ON CA M9W 5M8 Contact: Geoff Carroll

gcarroll@flysunwing.com T: (416)802-9643

F: (416)640-1595