

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

GREGORIAN III

Port Diesel Engine

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 15W40. Please confirm.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jun 2024		
0.44DL = 11.50DL						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PP0001445		
Sample Date		Client Info		13 Jun 2024		
Machine Age	hrs	Client Info		1521		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>100	9		
Chromium	ppm	ASTM D5185(m)	>20	<1		
Nickel	ppm	ASTM D5185(m)	>2	<1		
Titanium	ppm	ASTM D5185(m)	>2	0		
Silver	ppm	ASTM D5185(m)	>2	<1		
Aluminum	ppm	ASTM D5185(m)	>25	1		
_ead	ppm	ASTM D5185(m)	>40	0		
Copper	ppm	ASTM D5185(m)	>330	<1		
Γin	ppm	ASTM D5185(m)	>15	0		
Antimony	ppm	ASTM D5185(m)		0		
√anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	38		
Barium	ppm	ASTM D5185(m)	10	0		
Molybdenum	ppm	ASTM D5185(m)	100	69		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	450	201		
Calcium	ppm	ASTM D5185(m)	3000	1918		
Phosphorus	ppm	ASTM D5185(m)	1150	968		
Zinc	ppm	ASTM D5185(m)	1350	1137		
Sulfur	ppm	ASTM D5185(m)	4250	2882		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	3		
Sodium	ppm	ASTM D5185(m)	>158	3		
Potassium	ppm	ASTM D5185(m)	>20	3		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.5		
	A.L. /	ACTM D7CO4*	>20	0.0		
Nitration	Abs/cm	ASTM D7624*	>20	8.0		



OIL ANALYSIS REPORT

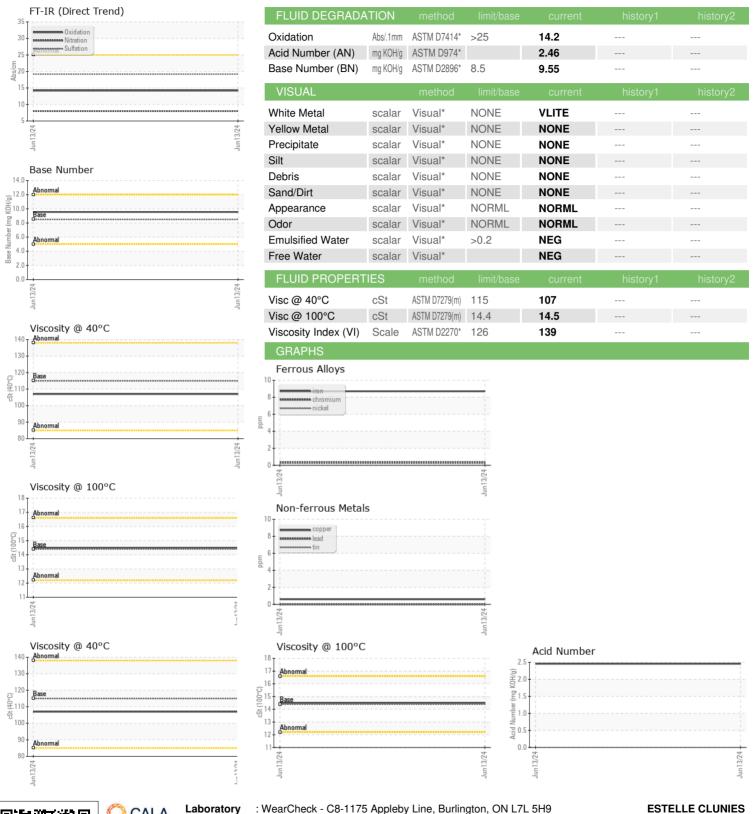



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number

: PP0001445 : 02642244

Unique Number : 5799783

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 17 Jun 2024

Tested : 18 Jun 2024 Diagnosed

: 18 Jun 2024 - Wes Davis Test Package : MAR 2 (Additional Tests: KV40, TAN Auto, TAN Man, VI, Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

11 SILVER COURT WATERDOWN, ON **CA L8B 0H9**

Contact: Estelle Clunies estelle.clunies@gmail.com T: (905)531-1994