



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id

**74203656**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 15W40. Please confirm.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number      | Client Info |             |            | <b>CU0023403</b>   | ---      | ---      |
| Sample Date        | Client Info |             |            | <b>13 Jun 2024</b> | ---      | ---      |
| Machine Age        | kms         | Client Info |            | <b>68639</b>       | ---      | ---      |
| Oil Age            | kms         | Client Info |            | <b>0</b>           | ---      | ---      |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | ---      | ---      |
| Sample Status      |             |             |            | <b>NORMAL</b>      | ---      | ---      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method |        | >3.0       | <b>&lt;1.0</b> | ---      | ---      |
| Water         | WC Method |        | >0.2       | <b>NEG</b>     | ---      | ---      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | ---      | ---      |

| WEAR METALS |     | method        | limit/base | current      | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185(m) | >90        | <b>23</b>    | ---      | ---      |
| Chromium    | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | ---      | ---      |
| Nickel      | ppm | ASTM D5185(m) | >2         | <b>&lt;1</b> | ---      | ---      |
| Titanium    | ppm | ASTM D5185(m) | >2         | <b>&lt;1</b> | ---      | ---      |
| Silver      | ppm | ASTM D5185(m) | >2         | <b>&lt;1</b> | ---      | ---      |
| Aluminum    | ppm | ASTM D5185(m) | >20        | <b>13</b>    | ---      | ---      |
| Lead        | ppm | ASTM D5185(m) | >40        | <b>0</b>     | ---      | ---      |
| Copper      | ppm | ASTM D5185(m) | >330       | <b>1</b>     | ---      | ---      |
| Tin         | ppm | ASTM D5185(m) | >15        | <b>0</b>     | ---      | ---      |
| Antimony    | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |
| Vanadium    | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |
| Beryllium   | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |
| Cadmium     | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |




| ADDITIVES  |     | method        | limit/base | current      | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185(m) | 250        | <b>51</b>    | ---      | ---      |
| Barium     | ppm | ASTM D5185(m) | 10         | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm | ASTM D5185(m) | 100        | <b>52</b>    | ---      | ---      |
| Manganese  | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm | ASTM D5185(m) | 450        | <b>717</b>   | ---      | ---      |
| Calcium    | ppm | ASTM D5185(m) | 3000       | <b>1339</b>  | ---      | ---      |
| Phosphorus | ppm | ASTM D5185(m) | 1150       | <b>803</b>   | ---      | ---      |
| Zinc       | ppm | ASTM D5185(m) | 1350       | <b>951</b>   | ---      | ---      |
| Sulfur     | ppm | ASTM D5185(m) | 4250       | <b>2244</b>  | ---      | ---      |
| Lithium    | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | ---      | ---      |

| CONTAMINANTS |     | method        | limit/base | current   | history1 | history2 |
|--------------|-----|---------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185(m) | >25        | <b>10</b> | ---      | ---      |
| Sodium       | ppm | ASTM D5185(m) | >158       | <b>7</b>  | ---      | ---      |
| Potassium    | ppm | ASTM D5185(m) | >20        | <b>22</b> | ---      | ---      |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | ASTM D7844* | >6         | <b>0</b>    | ---      | ---      |
| Nitration | Abs/cm   | ASTM D7624* | >20        | <b>8.0</b>  | ---      | ---      |
| Sulfation | Abs./1mm | ASTM D7415* | >30        | <b>19.7</b> | ---      | ---      |



# OIL ANALYSIS REPORT





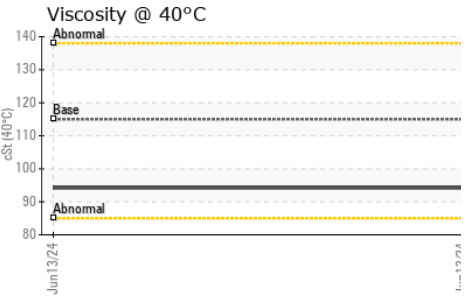
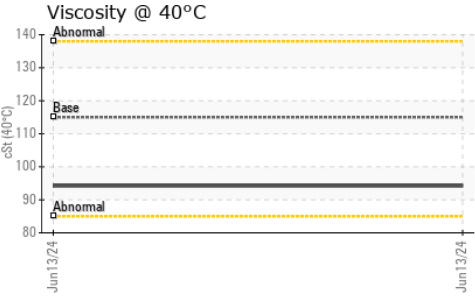
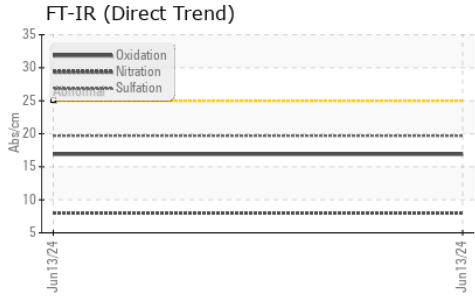


| FLUID DEGRADATION | method   | limit/base  | current | history1    | history2 |     |
|-------------------|----------|-------------|---------|-------------|----------|-----|
| Oxidation         | Abs./1mm | ASTM D7414* | >25     | <b>16.9</b> | ---      | --- |

| VISUAL           | method | limit/base | current | history1     | history2 |     |
|------------------|--------|------------|---------|--------------|----------|-----|
| White Metal      | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Yellow Metal     | scalar | Visual*    | NONE    | <b>VLITE</b> | ---      | --- |
| Precipitate      | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Silt             | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Debris           | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Sand/Dirt        | scalar | Visual*    | NONE    | <b>NONE</b>  | ---      | --- |
| Appearance       | scalar | Visual*    | NORML   | <b>NORML</b> | ---      | --- |
| Odor             | scalar | Visual*    | NORML   | <b>NORML</b> | ---      | --- |
| Emulsified Water | scalar | Visual*    | >0.2    | <b>NEG</b>   | ---      | --- |
| Free Water       | scalar | Visual*    |         | <b>NEG</b>   | ---      | --- |

| FLUID PROPERTIES     | method | limit/base    | current | history1    | history2 |     |
|----------------------|--------|---------------|---------|-------------|----------|-----|
| Visc @ 40°C          | cSt    | ASTM D7279(m) | 115     | <b>94.2</b> | ---      | --- |
| Visc @ 100°C         | cSt    | ASTM D7279(m) | 14.4    | <b>13.0</b> | ---      | --- |
| Viscosity Index (VI) | Scale  | ASTM D2270*   | 126     | <b>135</b>  | ---      | --- |

### GRAPHS

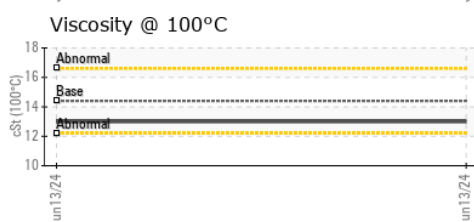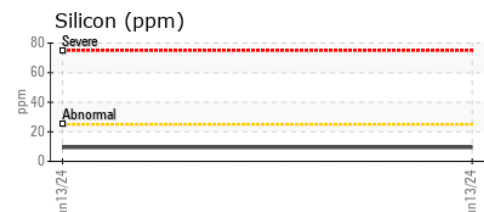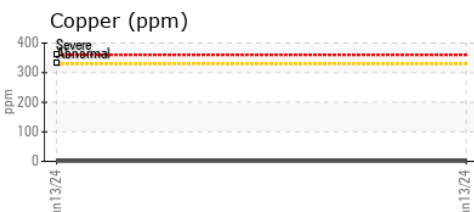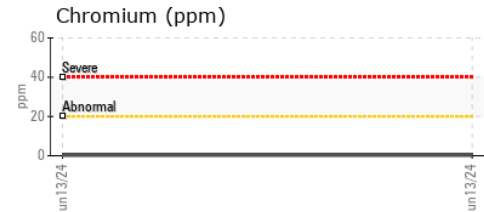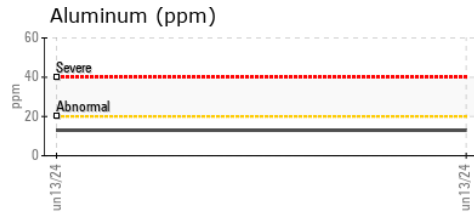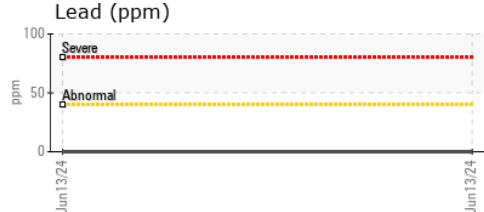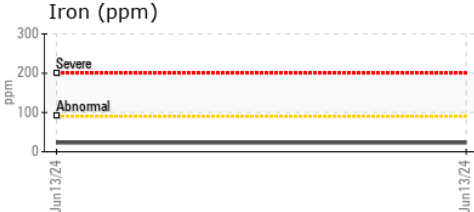

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CU0023403      **Received** : 17 Jun 2024  
**Lab Number** : **02642248**      **Tested** : 18 Jun 2024  
**Unique Number** : 5799787      **Diagnosed** : 18 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI, Visual )

**CUMMINS EASTERN CANADA LP**  
 3189 SWANSEA CRESCENT  
 OTTAWA, ON  
 CA K1G 3W5  
 Contact: Cindy Harrison  
 cindy.harrison@cummins.com  
 T: (613)736-1146  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.