


# **OIL ANALYSIS REPORT**

Sample Rating Trend

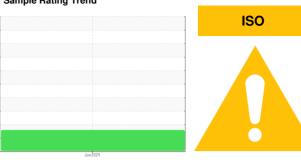

Machine Id

# A104000083

Tank Hydraulic System

PETRO CANADA ATF D3M (--- GAL)

## DIAGNOSIS

#### Recommendation

The component was not specified, however we determined the component was a hydraulic system based on the type of fluid used. Please specify component type with your next sample. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

#### **Fluid Condition**


The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

				Jun2024		`
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0610834		
Sample Date		Client Info		13 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
	n.n.m			<1	,	
Iron	ppm	ASTM D5185(m)	>20	0		
Chromium Nickel	ppm	ASTM D5185(m)	>20	-		
	ppm	ASTM D5185(m)	>20	<1		
Titanium Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	. 00	ں <1		
	ppm	ASTM D5185(m)	>20			
Lead	ppm	ASTM D5185(m)	>20	0 <1		
Copper	ppm	ASTM D5185(m)	>20	0		
Tin	ppm	ASTM D5185(m)	>20	-		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
		AOTAL DELOC()		^		
Cadmium	ppm	ASTM D5185(m)		0		
Cadmium  ADDITIVES	ppm	ASTM D5185(m)  method	limit/base	<b>o</b> current	history1	history2
	ppm	` '	limit/base 98			
ADDITIVES		method		current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185(m)	98	current 87	history1	history2
ADDITIVES  Boron  Barium	ppm ppm	method ASTM D5185(m) ASTM D5185(m)	98	current 87 <1	history1	history2
ADDITIVES  Boron  Barium  Molybdenum	ppm ppm	method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	98	current 87 <1 0	history1	history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese	ppm ppm ppm	method  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)	98 <0.00	87 <1 0 0	history1	history2   
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium	ppm ppm ppm ppm	method  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)	98 <0.00	current  87 <1 0 2	history1	history2   
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium	ppm ppm ppm ppm ppm	method  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)	98 <0.00 <1 70	current  87 <1 0 0 2 75	history1	history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus	ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)	98 <0.00 <1 70	current  87 <1 0 2 75 220	history1	history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc	ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)	98 <0.00 <1 70 220	current  87  <1 0 0 2 75 220 33	history1	history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method  ASTM D5185(m)	98 <0.00 <1 70 220	current  87  <1 0 0 2 75 220 33 745	history1	history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)	98 <0.00 <1 70 220	current  87 <1 0 0 2 75 220 33 745 <1	history1	history2
ADDITIVES  Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium  CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)	98 <0.00 <1 70 220 710	current  87 <1 0 0 2 75 220 33 745 <1 current	history1 history1	history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)	98 <0.00 <1 70 220 710	current  87  <1 0 0 2 75 220 33 745 <1 current 7	history1 history1	history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)	98 <0.00 <1 70 220 710  limit/base >15	current  87 <1 0 0 2 75 220 33 745 <1 current 7 <1	history1 history1	history2 history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium  Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)	98 <0.00 <1 70 220 710  limit/base >15 >20	current  87 <1 0 0 2 75 220 33 745 <1 current 7 <1	history1 history1	history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium  Potassium  FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)  method  ASTM D5185(m)	98 <0.00 <1 70 220 710  limit/base >15 >20  limit/base	current  87 <1 0 0 2 75 220 33 745 <1 current  7 <1 1	history1 history1 history1	history2 history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium  Potassium  FLUID CLEANLIN  Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)  method ASTM D5185(m) ASTM D5185(m)  ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	98 <0.00 <1 70 220 710  limit/base >15  >20  limit/base >40000	current  87 <1 0 0 2 75 220 33 745 <1 current 7 <1 1 current 35210	history1 history1 history1	history2 history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium  Potassium  FLUID CLEANLIN  Particles >4µm  Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)  method  ASTM D5185(m) ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)	98 <0.00 <1 70 220 710  limit/base >15 >20  limit/base >40000 >2500	current  87 <1 0 0 2 75 220 33 745 <1 current 7 <1 1 current 35210 ▲ 6595	history1 history1 history1 history1	history2 history2 history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium  Potassium  FLUID CLEANLIN  Particles >4µm  Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)  method  ASTM D5185(m) ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m) ASTM D5185(m)  ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)  ASTM D5185(m) ASTM D5185(m)  ASTM D7647 ASTM D7647	98 <0.00 <1 70 220 710  limit/base >15 >20 limit/base >40000 >2500 >80	current  87 <1 0 0 2 75 220 33 745 <1 current 7 <1 1 current 35210 △ 6595 △ 192	history1 history1 history1	history2 history2 history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium  Potassium  FLUID CLEANLIN  Particles >4µm  Particles >14µm  Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)  METHOD  METHOD  ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	98 <0.00  <1 70 220  710  limit/base >15 >20  limit/base >40000 >2500 >80 >20	current  87  <1 0 0 2 75 220 33 745 <1 current 7 <1 1 current 35210  ▲ 6595 ▲ 192 ■ 33	history1 history1 history1	history2 history2 history2
ADDITIVES  Boron  Barium  Molybdenum  Manganese  Magnesium  Calcium  Phosphorus  Zinc  Sulfur  Lithium  CONTAMINANTS  Silicon  Sodium  Potassium  FLUID CLEANLIN  Particles >4µm  Particles >14µm  Particles >21µm  Particles >38µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method  ASTM D5185(m)  method ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	98 <0.00  <1 70 220  710  limit/base >15 >20  limit/base >40000 >2500 >80 >20 >4	current  87  <1 0 0 2 75 220 33 745 <1 current 7 <1 1 current 35210  ▲ 6595  ▲ 192  ③ 33 2	history1 history1 history1	history2 history2 history2

Contact/Location: Vishal Kanwar - SKYGUE



## **OIL ANALYSIS REPORT**

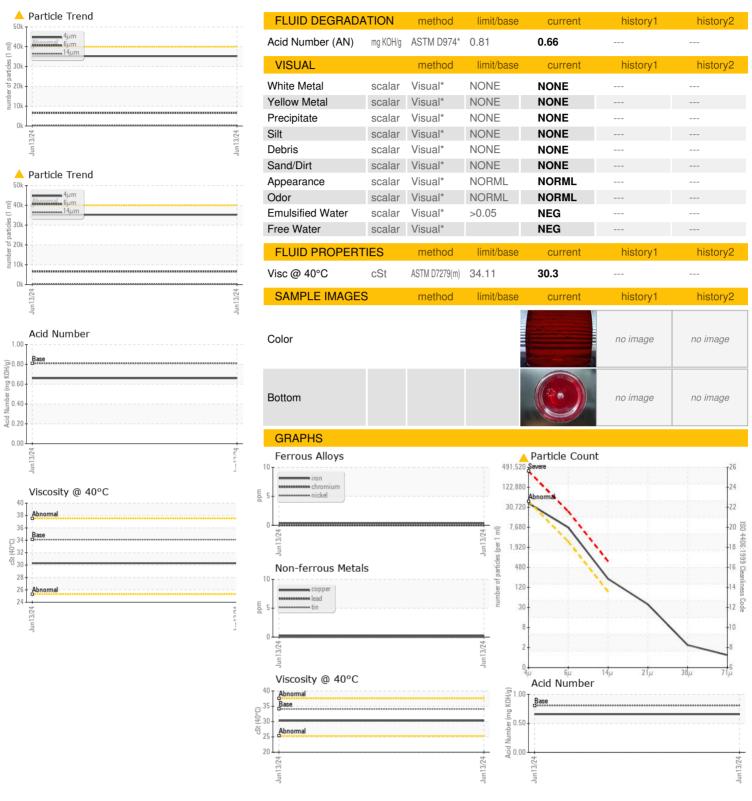



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number Unique Number : 5799868

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0610834 : 02642329

Test Package : IND 2

Received : 17 Jun 2024 **Tested** : 18 Jun 2024 Diagnosed

: 18 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Skyjack - Plant 2 (div of Linamar)

201 Woodlawn Rd. W. Guelph, ON

**CA N1H 1B8** Contact: Vishal Kanwar vishal.kanwar@skyjack.com

F: (519)837-4895

Contact/Location: Vishal Kanwar - SKYGUE

T: