

## **OIL ANALYSIS REPORT**

Sample Number

Sample Date

Machine Age

Oil Changed

Sample Status

WEAR METALS

Oil Age

Iron

Nickel

Silver

Lead

Zinc

Sulfur

Titanium

Aluminum

Chromium

Area Project [Project] IERA 0002D24890

**Tank Return Test Point** SKYDROL LD-4 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear


All component wear rates are normal.

#### Contamination

The water content is negligible. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

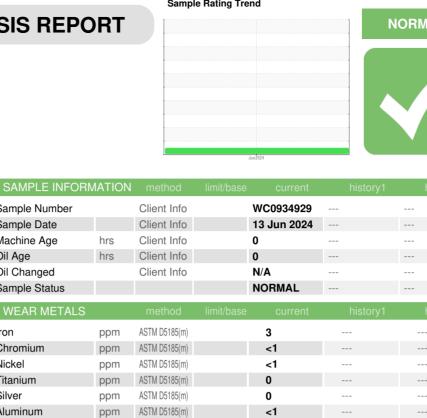

0

11

1652

Copper	ppm	ASTM D5185(m)		13		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		<1		
ADDITIVES		method	limit/base	current	history1	history2
					<b>j</b>	,
Boron	ppm	ASTM D5185(m)	0	2		
	ppm ppm	ASTM D5185(m) ASTM D5185(m)				
Boron		ASTM D5185(m)		2		
Boron Barium	ppm	ASTM D5185(m)	0	2 <1		
Boron Barium Molybdenum	ppm ppm	ASTM D5185(m) ASTM D5185(m)	0	2 <1 0		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	0 0 0 0	2 <1 0 0		

ASTM D5185(m)

ASTM D5185(m) O

ASTM D5185(m) 1900

ppm

ppm

ppm

Lithium	ppm	ASTM D5185(m)		<1			
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)		<1			
Sodium	ppm	ASTM D5185(m)		4			
Potassium	ppm	ASTM D5185(m)	>20	18			
Water	%	ASTM D6304*	>0.45	0.402			
ppm Water	ppm	ASTM D6304*	>4500	4020			

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>32000	5526		
Particles 15-25µm	count	NAS 1638	>5700	473		
Particles 25-50µm	count	NAS 1638	>1012	320		
Particles 50-100µm	count	NAS 1638	>180	7		
Particles >100µm	count	NAS 1638	>32	0		
NAS 1638	Class	NAS 1638	>7	6		





# **OIL ANALYSIS REPORT**

Water (KF)	FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
5000 Severe	Acid Number (AN)		ASTM D974*	0.10	0.08		
E 4000	VISUAL		method	limit/base	current	history1	history2
di 3000 - ≫ 2000 -	White Metal	scalar	Visual*	NONE	NONE		
	Yellow Metal	scalar	Visual*	NONE	NONE		
1000-	Precipitate	scalar	Visual*	NONE	NONE		
14 15 15 15 10	Silt	scalar	Visual*	NONE	NONE		
Jun13/24	Debris	scalar	Visual*	NONE	NONE		
	Sand/Dirt	scalar	Visual*	NONE	NONE		
Acid Number	Appearance	scalar	Visual*	NORML	NORML		
© 0.48	Odor	scalar	Visual*	NORML	NORML		
Solution Contraction Contracti	Emulsified Water	scalar	Visual*	>0.45	NEG		
臣0.36 - 월	Free Water	scalar	Visual*		NEG		
an 0.24 pp 0.12 - Base	FLUID PROPER	TIES	method	limit/base	current	history1	history2
9 0.12 Base	Visc @ 40°C	cSt	ASTM D7279(m)	11.42	8.9		
Jun 13/24	SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Water (KF) Soud	Color					no image	no image
4000 augusta 2000 1000	Bottom					no image	no image
	GRAPHS						
Jun13/24	Ferrous Alloys				Particle Count		
ыл	10 iron 1			1,024,00			1 <sup>12</sup>
Viscosity @ 40°C	E 5-			256,00			10
14 Severe				128,00	0		9
12 - Basemal	0						8 ≥
Ç 10 -	Jun 13/2 <sup>4</sup>			Jun13/24 (per 100 m)) 16,00 16,00			7 163
(J. 10 	,	-		- <u>-</u> 3 <u>4</u> 16,00			6 Cont
Abnormal 6 + Severe	Non-ferrous Meta	IS		4,00			MAS 1638 Contamination Le
	10 -			 		· · · · · · · · · · · · · · · · · · ·	tion Le
Jun13/24	E. 5			E 1,00			2
Jun J	0			50		-	1
	3/24			47/EI 12			
	Jun13/2			E	0.	05.50	800
	Viscosity @ 40°C				Acid Number	25-\$0µ 50-	100μ >100μ
	14 12 Severe			() HOX Bu 0.40	Severe		
	0-0-0 753 8 <b>Abnormal</b>			Ĕ0.40·	Abnormal		-
	45 8 Abnormal Severe			4	Base		
	4 L				9	****	
	Jun 13/24			Jun 13/24	Jun 13/24		Jun13/24
	Jur			Jur	Jur		Jun
Laboratory Sample No. Lab Number Unique Number Test Package To discuss this sample report Test denoted (*) outside scop Validity of results and interpret	: 5799986 : IND 2 ( Additional Tes t, contact Customer Serv be of accreditation, (m) m	Recei Teste Diagr sts: KF, P fice at 1-8 nethod mo	ived : 17 id : 20 nosed : 20 PrtCount, Prt0 800-268-213 iodified, (e) te	' Jun 2024 ) Jun 2024 Jun 2024 - Kevii CountNAS, TA (. sted at extern	n Marson AN Man ) nal lab.	57 Con rob.zane@sa	ding Systems 4 Monarch Ave Ajax, ON CA L1S 2G8 tact: Rob Zane frangroup.com T: (905)683-6983

Report Id: SAFAJA [WCAMIS] 02642447 (Generated: 06/20/2024 08:20:18) Rev: 1

Submitted By: Rob Zane Page 2 of 2