




# OIL ANALYSIS REPORT

Area  
**GRANULEUSE RETECH**  
 Machine Id  
**709279: UNITE HYDRAULIQUE 10HP, RETECH**  
 Component  
**Hydraulic Power Pack**  
 Fluid  
**CHEVRON CLARITY HYDRAULIC AW 32 (180 LTR)**

Sample Rating Trend

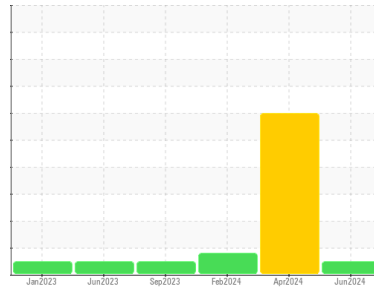

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>CB0031609</b>   | CB0031831   | CB0031635   |
| Sample Date        | Client Info |             |            | <b>17 Jun 2024</b> | 23 Apr 2024 | 01 Feb 2024 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | SEVERE      | ABNORMAL    |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.05      | <b>NEG</b> | NEG      | NEG      |





| WEAR METALS |     | method        | limit/base | current      | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | 1        | <1       |
| Chromium    | ppm | ASTM D5185(m) | >20        | <b>0</b>     | 0        | 0        |
| Nickel      | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | 0        | 0        |
| Titanium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | 0        | 0        |
| Aluminum    | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | 0        | <1       |
| Lead        | ppm | ASTM D5185(m) | >20        | <b>0</b>     | 0        | 0        |
| Copper      | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | 0        | <1       |
| Tin         | ppm | ASTM D5185(m) | >20        | <b>0</b>     | 0        | 0        |
| Antimony    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Vanadium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Beryllium   | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method        | limit/base | current      | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185(m) |            | <b>0</b>     | 2        | 0        |
| Barium     | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Manganese  | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Magnesium  | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | 0        | <1       |
| Calcium    | ppm | ASTM D5185(m) |            | <b>54</b>    | <1       | 52       |
| Phosphorus | ppm | ASTM D5185(m) |            | <b>336</b>   | 262      | 339      |
| Zinc       | ppm | ASTM D5185(m) |            | <b>421</b>   | 1        | 420      |
| Sulfur     | ppm | ASTM D5185(m) |            | <b>799</b>   | 7072     | 833      |
| Lithium    | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | <1       |

| CONTAMINANTS |     | method        | limit/base | current      | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185(m) | >15        | <b>&lt;1</b> | 0        | <1       |
| Sodium       | ppm | ASTM D5185(m) |            | <b>0</b>     | 1        | 0        |
| Potassium    | ppm | ASTM D5185(m) | >20        | <b>0</b>     | <1       | <1       |

| FLUID CLEANLINESS |              | method    | limit/base      | current    | history1   | history2 |
|-------------------|--------------|-----------|-----------------|------------|------------|----------|
| Particles >4µm    | ASTM D7647   | >5000     | <b>2365</b>     | ▲ 63528    | ▲ 10596    |          |
| Particles >6µm    | ASTM D7647   | >1300     | <b>449</b>      | ▲ 18743    | 1253       |          |
| Particles >14µm   | ASTM D7647   | >160      | <b>36</b>       | ▲ 1035     | 42         |          |
| Particles >21µm   | ASTM D7647   | >40       | <b>9</b>        | ▲ 226      | 14         |          |
| Particles >38µm   | ASTM D7647   | >10       | <b>1</b>        | ● 15       | 1          |          |
| Particles >71µm   | ASTM D7647   | >3        | <b>0</b>        | 0          | 1          |          |
| Oil Cleanliness   | ISO 4406 (c) | >19/17/14 | <b>18/16/12</b> | ▲ 23/21/17 | ▲ 21/17/13 |          |

# OIL ANALYSIS REPORT

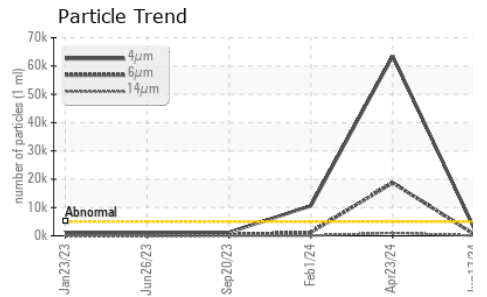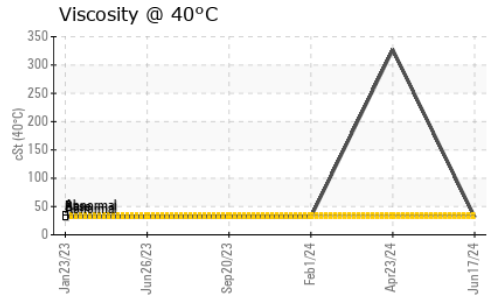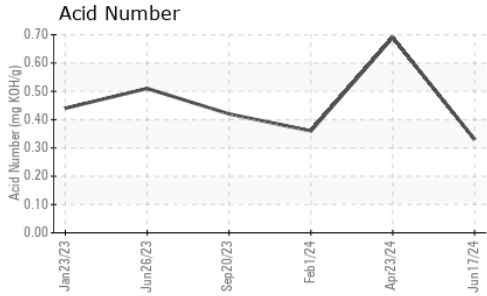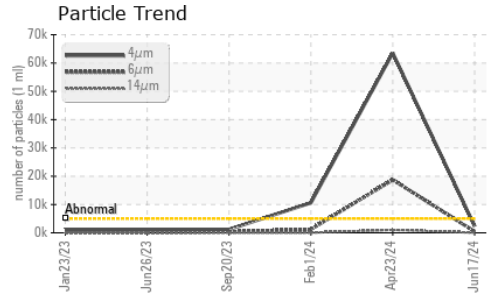


| FLUID DEGRADATION | method   | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D974* | <b>0.33</b> | 0.69     | 0.36     |





| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | Visual*    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | Visual*    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | Visual*    | NONE    | NONE     | NONE     |
| Silt             | scalar | Visual*    | NONE    | NONE     | NONE     |
| Debris           | scalar | Visual*    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | Visual*    | NONE    | NONE     | NONE     |
| Appearance       | scalar | Visual*    | NORML   | NORML    | NORML    |
| Odor             | scalar | Visual*    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | Visual*    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | Visual*    | NEG     | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base    | current     | history1 | history2 |
|------------------|--------|---------------|-------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D7279(m) | <b>31.5</b> | ▲ 327    | 31.6     |

## SAMPLE IMAGES

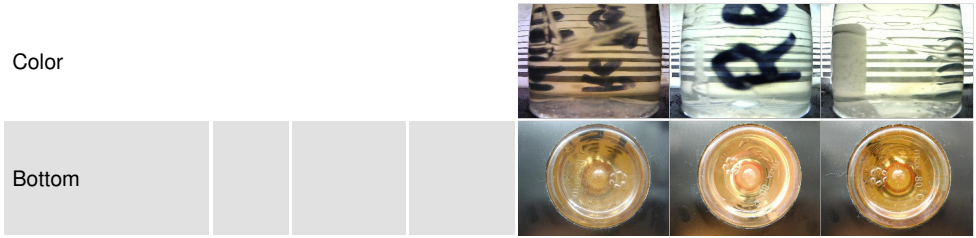

## GRAPHS

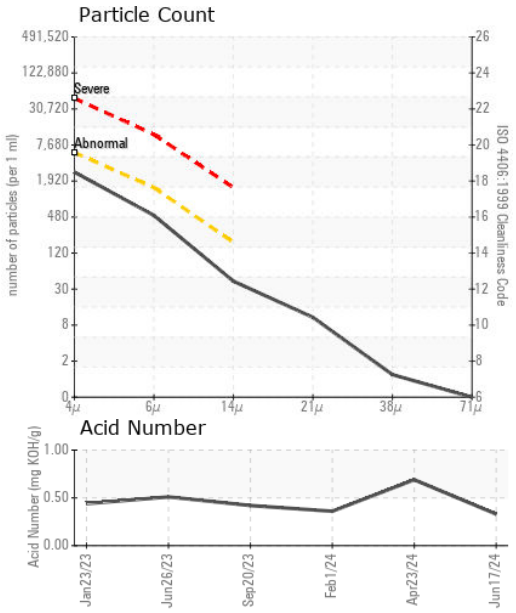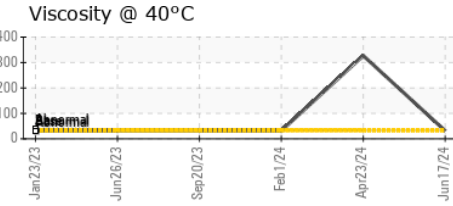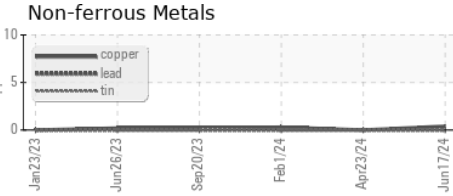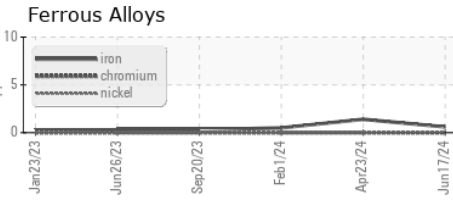

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CB0031609 **Received** : 18 Jun 2024  
**Lab Number** : **02642588** **Tested** : 19 Jun 2024  
**Unique Number** : 5800127 **Diagnosed** : 19 Jun 2024 - Kevin Marson  
**Test Package** : IND 2

**Owens Corning Celfortec LP**  
 542, rue Gaetan  
 Salaberry de Valleyfield, QC  
 CA J6S 0A7  
 Contact: Hugo Duguay  
 hugo.duguay@owenscorning.com  
 T: (450)377-1725 E X:T 7531  
 F: (450)377-2973

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.