




OIL ANALYSIS REPORT

Sample Rating Trend

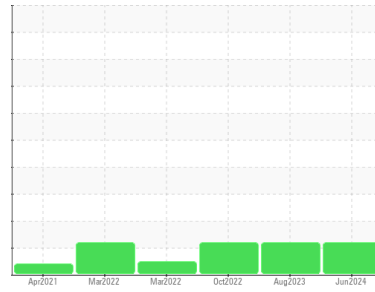

FUEL



Machine Id
VOLVO A30F 82324
 Component
Diesel Engine
 Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0940294	WC0849279	VCP273427
Sample Date	Client Info		13 Jun 2024	28 Aug 2023	19 Oct 2022
Machine Age	hrs	Client Info	9507	8969	8537
Oil Age	hrs	Client Info	500	500	500
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	13	10	8
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>10	<1	0	<1
Titanium	ppm	ASTM D5185(m)		<1	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>30	5	3	3
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>20	3	2	2
Tin	ppm	ASTM D5185(m)	>20	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2.5	34	37	40
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0.7	41	38	38
Manganese	ppm	ASTM D5185(m)	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	256	493	483	494
Calcium	ppm	ASTM D5185(m)	2057	1596	1622	1808
Phosphorus	ppm	ASTM D5185(m)	935	906	934	974
Zinc	ppm	ASTM D5185(m)	1223	1035	1030	1042
Sulfur	ppm	ASTM D5185(m)	4079	2332	2357	2449
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	11	9	7
Sodium	ppm	ASTM D5185(m)		4	3	3
Potassium	ppm	ASTM D5185(m)	>20	1	<1	<1
Fuel	%	ASTM D7593*	>3.0	▲ 2.8	▲ 3.3	▲ 3.5

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	8.5	8.0	8.0
Sulfation	Abs./1mm	ASTM D7415*	>30	22.5	23.7	22.8



OIL ANALYSIS REPORT






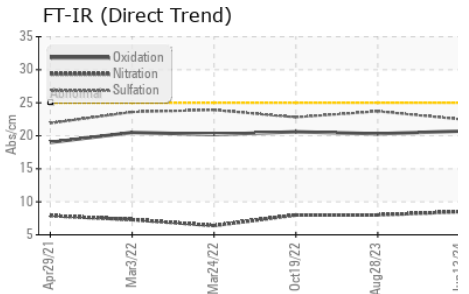
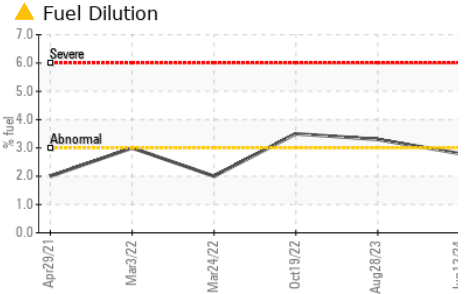
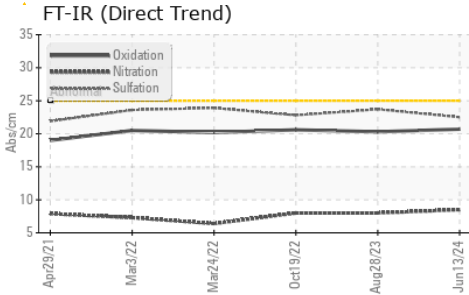


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	20.7	20.3	20.6

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	▲ 11.7	▲ 11.9	▲ 12.0

GRAPHS

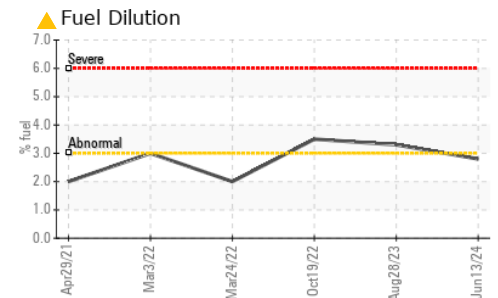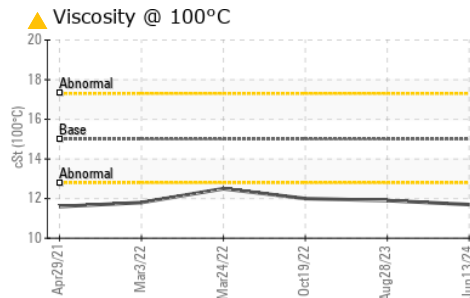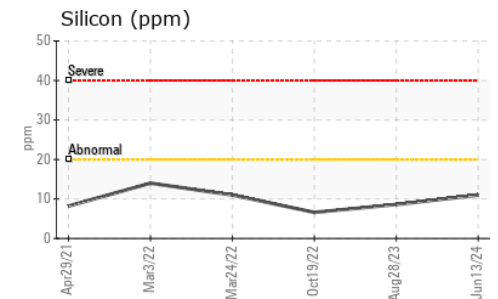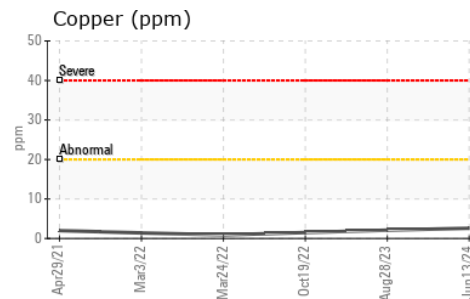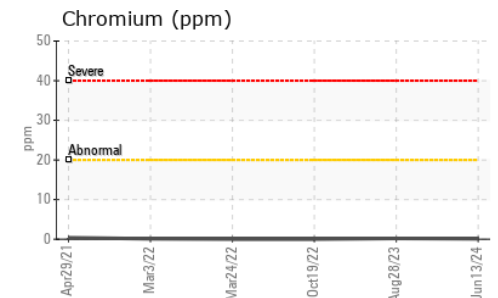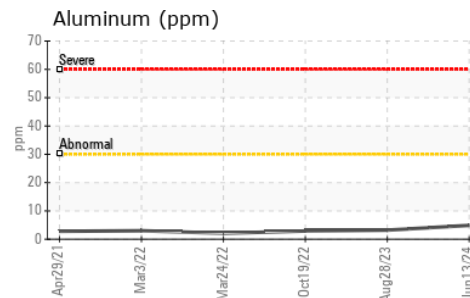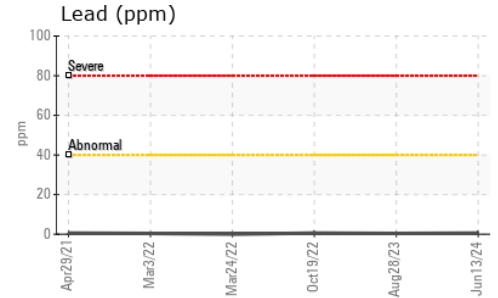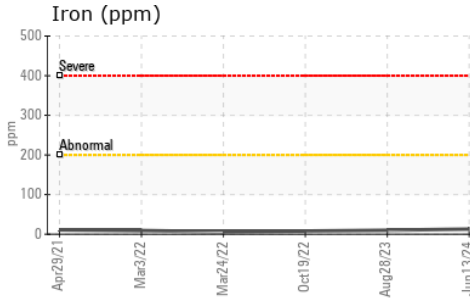

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0940294 **Received** : 19 Jun 2024
Lab Number : 02642825 **Tested** : 20 Jun 2024
Unique Number : 5800364 **Diagnosed** : 21 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: PercentFuel)

STRONGCO EQUIPMENT
 255 BAIG BOULEVARD
 MONCTON, NB
 CA E1E 1E1
 Contact: Greg Ward
 gward@strongco.com
 T: (506)857-8425
 F: (506)857-0851

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.