




OIL ANALYSIS REPORT

Sample Rating Trend

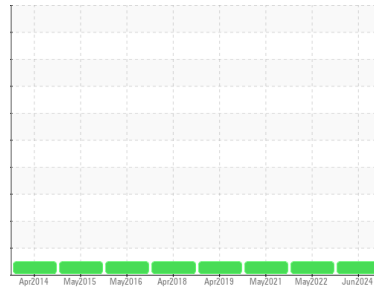

NORMAL



Machine Id
JOHN DEERE H0007
 Component
Diesel Engine
 Fluid
DISEL ENGINE OIL SAE 15W40 (24 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0918791	WC0581975	WC0510673
Sample Date	Client Info		05 Jun 2024	25 May 2022	13 May 2021
Machine Age	hrs	Client Info	320	288	279
Oil Age	hrs	Client Info	22	32	23
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	<1.0
Water	WC Method	>0.21	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>51	2	2	2
Chromium	ppm	ASTM D5185(m)	>11	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>31	1	2	2
Lead	ppm	ASTM D5185(m)	>26	0	<1	<1
Copper	ppm	ASTM D5185(m)	>26	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	11	63	61
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	9	75	73
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	450	19	87	82
Calcium	ppm	ASTM D5185(m)	3000	2094	2022	2016
Phosphorus	ppm	ASTM D5185(m)	1150	844	1038	975
Zinc	ppm	ASTM D5185(m)	1350	923	1126	1145
Sulfur	ppm	ASTM D5185(m)	4250	2892	3306	3359
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>22	2	2	2
Sodium	ppm	ASTM D5185(m)	>158	1	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	5.5	7.4	6.9
Sulfation	Abs./1mm	ASTM D7415*	>30	15.4	18.7	17.4



OIL ANALYSIS REPORT







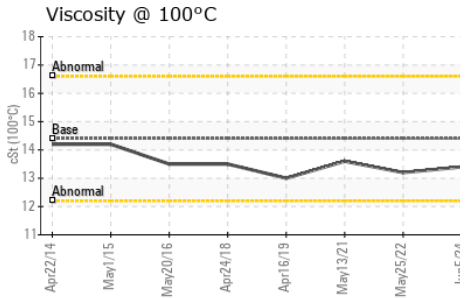
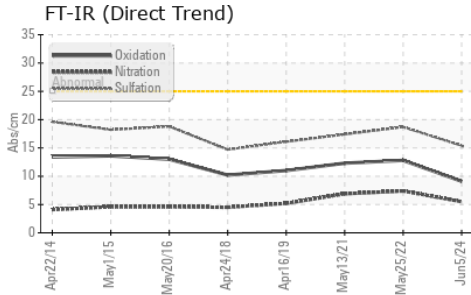


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	9.1	12.8	12.3

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.21	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.4	13.2	13.6

GRAPHS

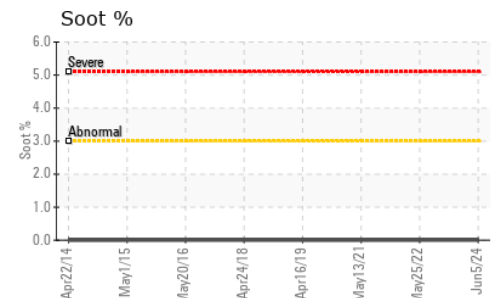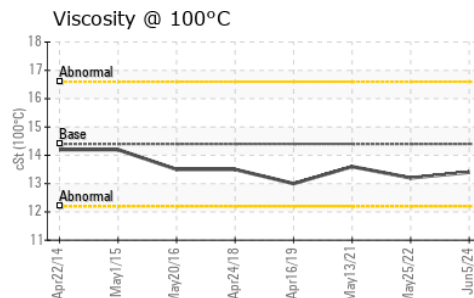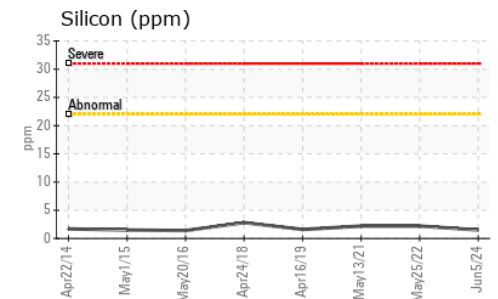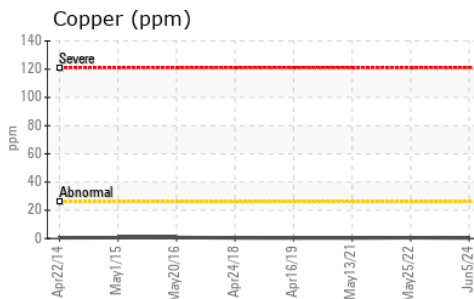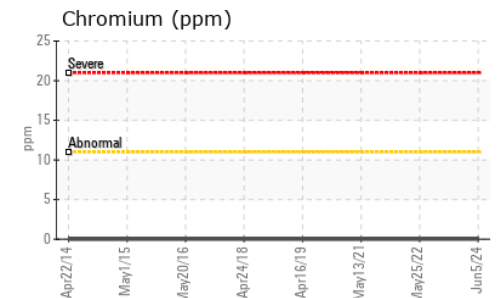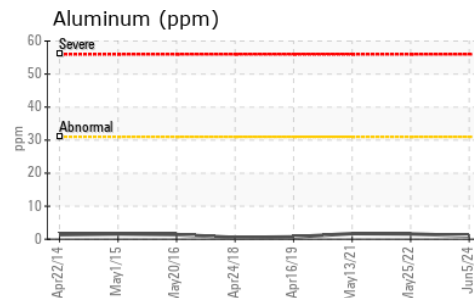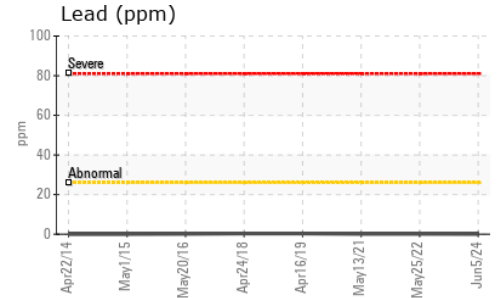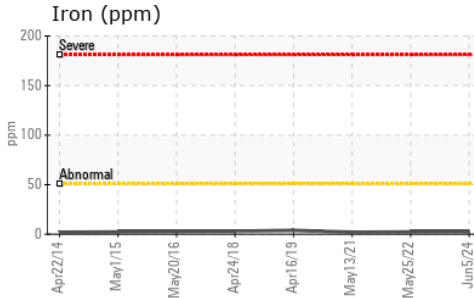

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0918791
Lab Number : 02642840
Unique Number : 5800379
Test Package : MOB 1

Received : 19 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

GENCARE SERVICES LTD.
 360 SOVEREIGN ROAD
 LONDON, ON
 CA N6M 1A8
 Contact: Teresa Matthews
 tmatthews@gencare.com
 T: (519)659-7118
 F: (519)451-1707

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.