




# OIL ANALYSIS REPORT

Sample Rating Trend

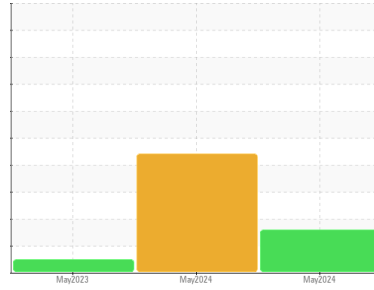

ISO



Machine Id  
**SC #2**  
 Component  
**Unknown Component**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Please note that this sample was received without a component ID. Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please provide more complete information on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the sample.

### Fluid Condition

The AN level is acceptable for this fluid. The sample is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0916262</b>	WC0916261	WC0802970
Sample Date	Client Info			<b>29 May 2024</b>	26 May 2024	02 May 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	SEVERE	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			<b>NEG</b>	NEG	NEG






WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185(m)		<b>3</b>	3	2
Copper	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Phosphorus	ppm	ASTM D5185(m)		<b>3</b>	3	2
Zinc	ppm	ASTM D5185(m)		<b>3</b>	3	2
Sulfur	ppm	ASTM D5185(m)		<b>210</b>	178	700
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Sodium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1



# OIL ANALYSIS REPORT

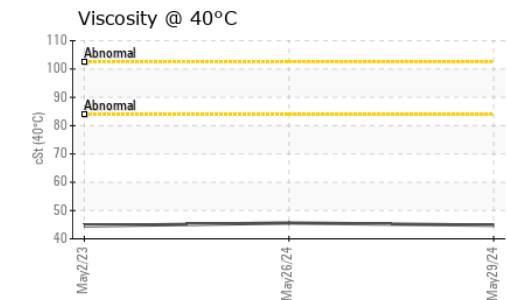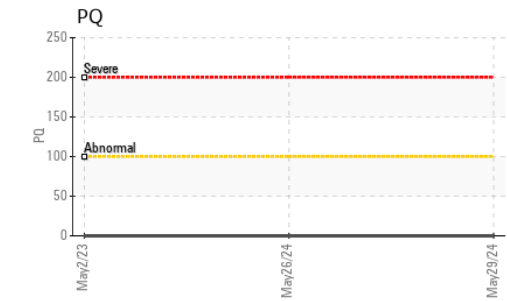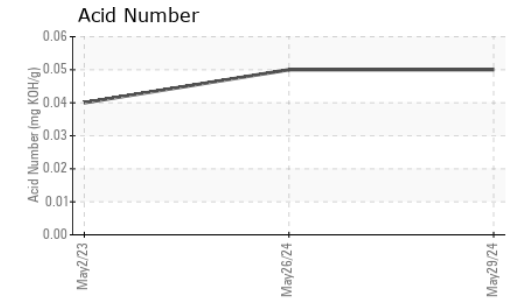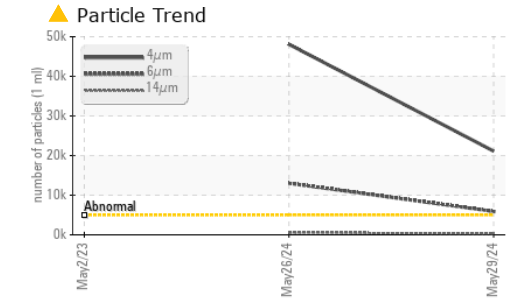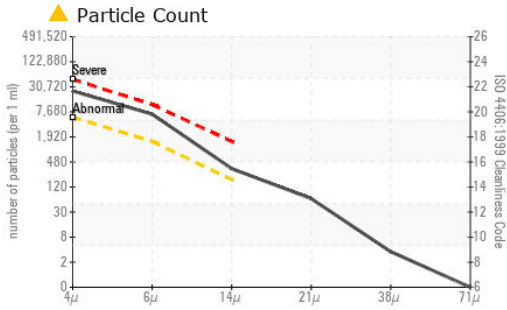

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 21132	▲ 48087	---
Particles >6µm	ASTM D7647	>1300	▲ 5896	▲ 13018	---
Particles >14µm	ASTM D7647	>160	● 293	▲ 536	---
Particles >21µm	ASTM D7647	>40	56	▲ 90	---
Particles >38µm	ASTM D7647	>10	3	4	---
Particles >71µm	ASTM D7647	>3	0	1	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/20/15	▲ 23/21/16	---


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.05	0.05	0.04

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	NEG	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	44.8	45.6	44.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color



Bottom



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0916262  
**Lab Number** : 02642895  
**Unique Number** : 5800434  
**Test Package** : IND 2 ( Additional Tests: PQ, PRTCOUNT )

**Received** : 19 Jun 2024  
**Tested** : 21 Jun 2024  
**Diagnosed** : 21 Jun 2024 - Kevin Marson

**Voith Group**  
 2030 Bristol Circle - Unit 115  
 Oakville, ON  
 CA L6H 6P5  
 Contact: Gazal Choudhary  
 Gazal.Choudhary@voith.com  
 T: (905)287-5828  
 F: (905)855-0249

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.