




# OIL ANALYSIS REPORT

## Sample Rating Trend

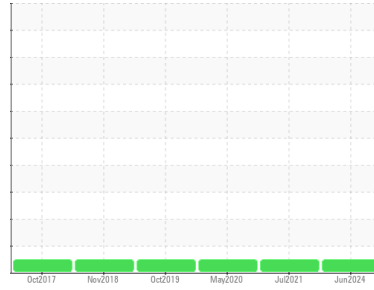

**NORMAL**



Machine Id

**VILTER ENG #5.2 C1**

Component

**Refrigeration Compressor**

Fluid

**VILTER 717 COMPRESSOR OIL ISO 68 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0946955</b>	WC0459288	WC0459272
Sample Date	Client Info		<b>17 Jun 2024</b>	15 Jul 2021	11 May 2020
Machine Age	hrs	Client Info	<b>325</b>	20192	10131
Oil Age	hrs	Client Info	<b>325</b>	20192	10131
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	5
Iron	ppm	ASTM D5185(m) >8	<b>&lt;1</b>	4	0
Chromium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185(m) >2	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m) >8	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Phosphorus	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Zinc	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Sulfur	ppm	ASTM D5185(m)	<b>15</b>	8	12
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

### CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	<1	<1
Water	%	ASTM D6304* >0.01	<b>0.001</b>	0.001	0.001
ppm Water	ppm	ASTM D6304* >100	<b>7</b>	11.4	3.7

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.2	<b>0.01</b>	0.04	0.01



# OIL ANALYSIS REPORT

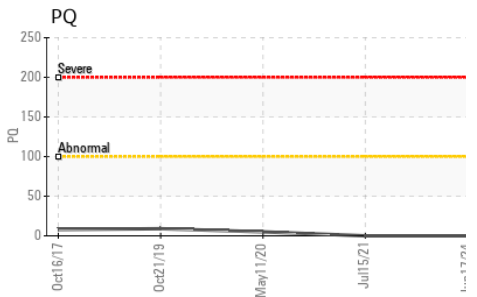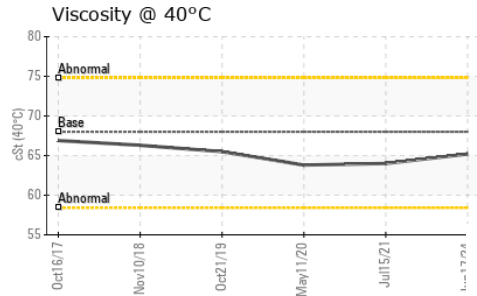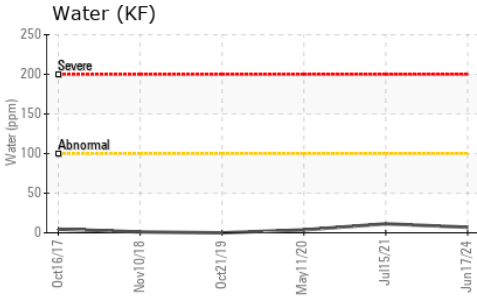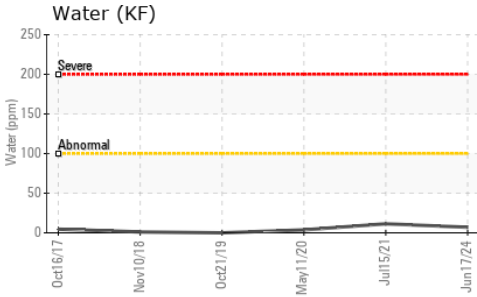


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.01	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	65.2	64.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------






Color

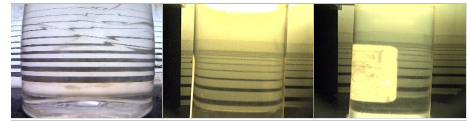

Bottom



## GRAPHS

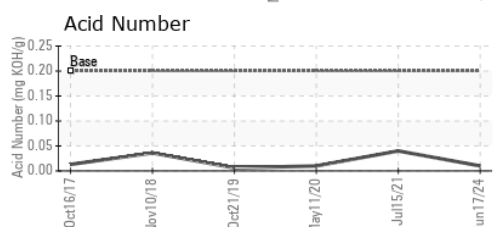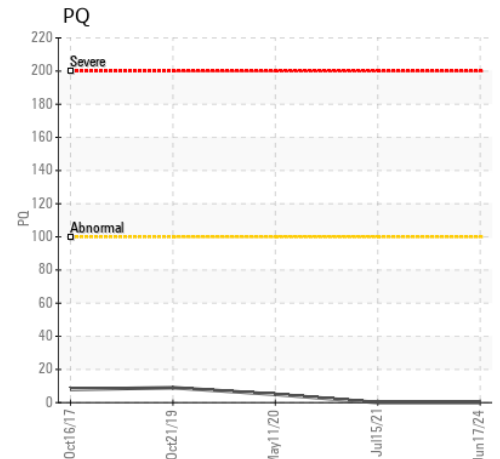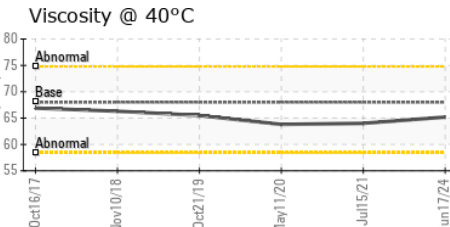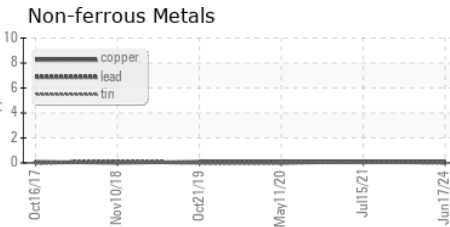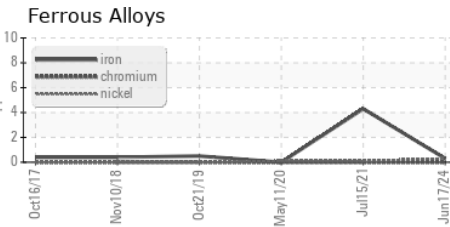

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0946955 **Received** : 19 Jun 2024  
**Lab Number** : 02642964 **Tested** : 20 Jun 2024  
**Unique Number** : 5800503 **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**CONESTOGA COLD STORAGE**  
 2660 MEADOWPINE BLVD., DOOR 57, CALL EXT. 2317  
 MISSISSAUGA, ON  
 CA L5N 7E6  
 Contact: Jeremy Koziol  
 jkoziol@coldstorage.com  
 T: (519)748-4086  
 F: (905)567-1844

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.