

OIL ANALYSIS REPORT

Area
Chem-Ecol A2406126

Hydraulic System

CHEM-ECOL PUREPROTECT 32 AW (--- GAL)

Sample Rating Trend



Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

AL)				Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		3119-A		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		06/18/2024		
Sample Number		Client Info		E30002435		
Sample Date		Client Info		18 Jun 2024		
Machine Age	hrs	Client Info		0		
Dil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Fitanium	ppm	ASTM D5185(m)	<i>></i> 20	0		
Silver		ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
	ppm	ASTM D5185(m)		0		
Lead	ppm		>20			
Copper	ppm	ASTM D5185(m)	>20	<1		
Γin National III	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
/anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
/lagnesium	ppm	ASTM D5185(m)		138		
Calcium	ppm	ASTM D5185(m)		127		
Phosphorus	ppm	ASTM D5185(m)		409		
Zinc	ppm	ASTM D5185(m)		524		
Sulfur	ppm	ASTM D5185(m)		1049		
₋ithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	; 	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Nater	%	ASTM D6304*	>0.05	0.004		


ppm Water

ppm ASTM D6304* >500

47



OIL ANALYSIS REPORT

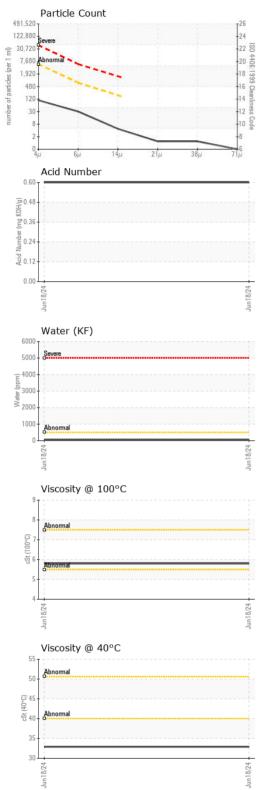

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	93		
Particles >6µm		ASTM D7647	>640	27		
Particles >14µm		ASTM D7647	>160	4		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	14/12/9		
FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.60		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		32.9		
Visc @ 100°C	cSt	ASTM D7279(m)		5.8		
Viscosity Index (VI)	Scale	ASTM D2270*		118		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: E30002435 Lab Number : 02643206 Unique Number : 5800745

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : 20 Jun 2024 Received **Tested** : 21 Jun 2024

: 25 Jun 2024 - Aylwin Lee Diagnosed Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950