


OIL ANALYSIS REPORT

IMT Corporation - 102600 AM1011-R

Component Quench Oil

QUENCH OIL K-9 (--- GAL)

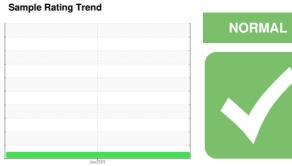

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		mmbasc	Furnace #1458		
Machine ID		Client Info				
Department		Client Info		Sales		
Sample From		Client Info		Machine		
Production Stage Sent to WC		Client Info		Lab Reclaim 06/18/2024		
Sample Number		Client Info		E30002429		
		Client Info		18 Jun 2024		
Sample Date	hrs	Client Info		0		
Machine Age		Client Info		0		
Oil Age	hrs			N/A		
Oil Changed		Client Info		NORMAL		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)		14		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Γitanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
_ead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		<1		
Γin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
/anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		3		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		1		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		15		
Phosphorus	ppm	ASTM D5185(m)		8		
Zinc	ppm	ASTM D5185(m)		4		
Sulfur	ppm	ASTM D5185(m)		324		
_ithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<1		
Sodium	ppm	ASTM D5185(m)		4		
Potassium	ppm	ASTM D5185(m)	>20	8		
Water	%	ASTM D6304*		0.001		
ann Matar	10 10 100	ACTM DCCC4*		10		

ppm Water


ASTM D6304*

ppm

10



OIL ANALYSIS REPORT

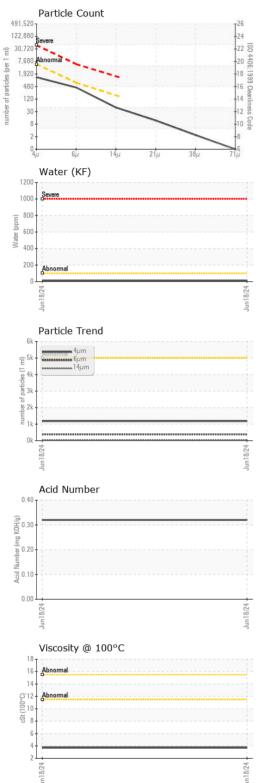

Particles >4μm Particles >6μm		method	limit/base	current	history1	history2
Particles >6µm		ASTM D7647	>5000	1183		
		ASTM D7647	>640	382		
Particles >14µm		ASTM D7647	>160	42		
Particles >21μm		ASTM D7647	>40	10		
Particles >38μm		ASTM D7647	>10	2		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	17/16/13		
FLUID DEGRADAT	ION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.32		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate s	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt s	scalar	Visual*	NONE	NONE		
Appearance s	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water s	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERTIE	ES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		16.9		
Visc @ 100°C	cSt	ASTM D7279(m)		3.7		
Viscosity Index (VI)	Scale	ASTM D2270*		104		
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image





Laboratory

Sample No.

: E30002429 Lab Number : 02643207 Unique Number : 5800746

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received **Tested**

: 20 Jun 2024 Diagnosed

: 24 Jun 2024 : 24 Jun 2024 - Tatiana Sorkina

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950