




PROBLEM SUMMARY

Sample Rating Trend



VISUAL METAL

Area
UNASSIGNED
Machine Id
XH24040010

Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

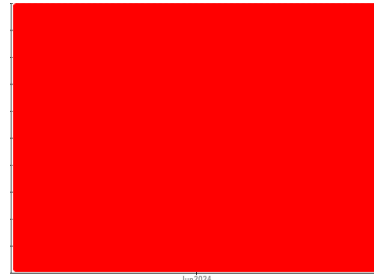

COMPONENT CONDITION SUMMARY

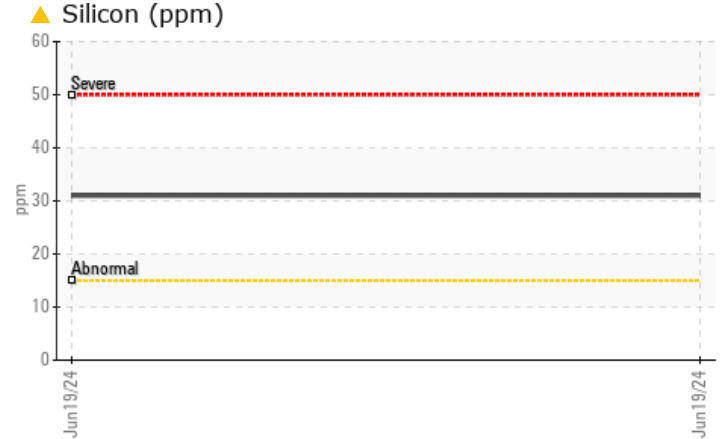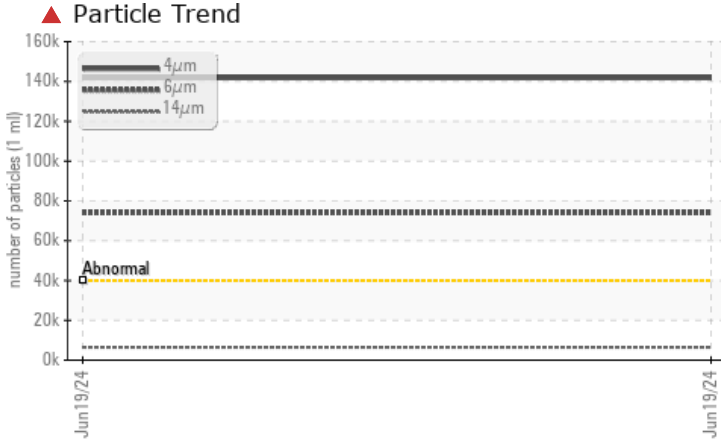

RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you check for visible metal particles in the oil. We recommend that you drain the oil from the component if this has not already been done. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Silicon	ppm	ASTM D5185(m)	>15	▲ 31	---	---
Particles >4µm		ASTM D7647	>40000	▲ 141781	---	---
Particles >6µm		ASTM D7647	>2500	▲ 74002	---	---
Particles >14µm		ASTM D7647	>80	▲ 6439	---	---
Particles >21µm		ASTM D7647	>20	▲ 1278	---	---
Particles >38µm		ASTM D7647	>4	▲ 68	---	---
Oil Cleanliness		ISO 4406 (c)	>22/18/13	▲ 24/23/20	---	---
White Metal	scalar	Visual*	NONE	▲ LTMOD	---	---
PrtFilter					no image	no image

Customer Id: SKYGUE
 Sample No.: WC0610821
 Lab Number: 02643213
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Check For Visual Metal	---	---	?	We advise that you check for visible metal particles in the oil.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend


VISUAL METAL

Area
UNASSIGNED

Machine Id
XH24040010

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

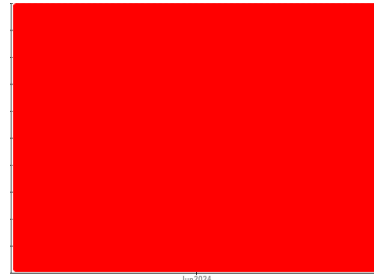

DIAGNOSIS

▲ Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you check for visible metal particles in the oil. We recommend that you drain the oil from the component if this has not already been done. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

▲ Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. There is a moderate concentration of dirt present in the oil. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Particle Filter (Magn: 100 x)



SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0610821	---	---
Sample Date	Client Info			19 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				SEVERE	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	3	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>20	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>20	0	---	---
Copper	ppm	ASTM D5185(m)	>20	2	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	1	---	---
Barium	ppm	ASTM D5185(m)	5	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	25	<1	---	---
Calcium	ppm	ASTM D5185(m)	200	12	---	---
Phosphorus	ppm	ASTM D5185(m)	300	209	---	---
Zinc	ppm	ASTM D5185(m)	370	242	---	---
Sulfur	ppm	ASTM D5185(m)	2500	697	---	---
Lithium	ppm	ASTM D5185(m)		1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	▲ 31	---	---
Sodium	ppm	ASTM D5185(m)		6	---	---
Potassium	ppm	ASTM D5185(m)	>20	13	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>40000	▲ 141781	---	---
Particles >6µm		ASTM D7647	>2500	▲ 74002	---	---
Particles >14µm		ASTM D7647	>80	▲ 6439	---	---
Particles >21µm		ASTM D7647	>20	▲ 1278	---	---
Particles >38µm		ASTM D7647	>4	▲ 68	---	---
Particles >71µm		ASTM D7647	>3	3	---	---
Oil Cleanliness		ISO 4406 (c)	>22/18/13	▲ 24/23/20	---	---



OIL ANALYSIS REPORT

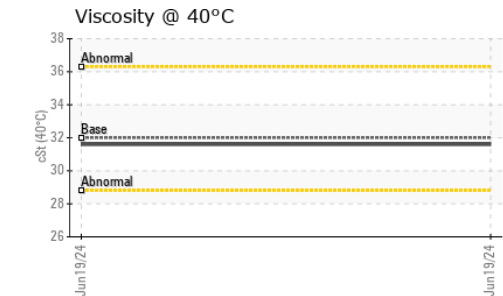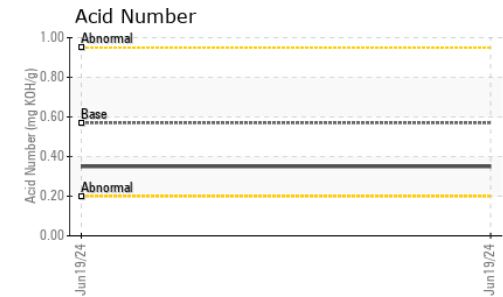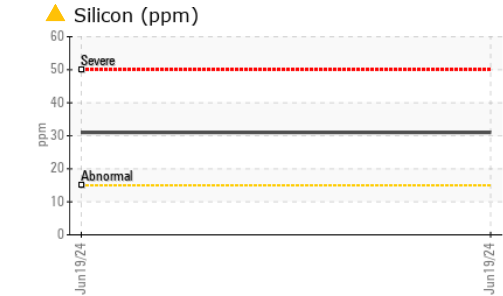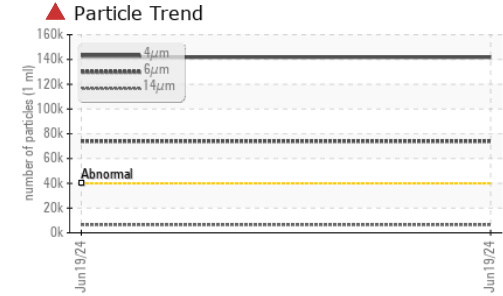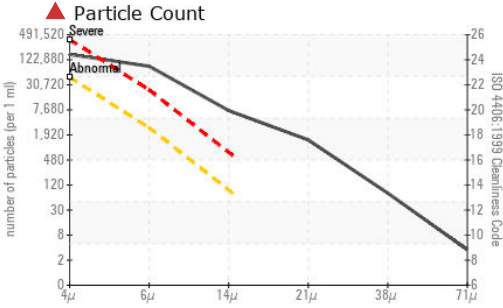

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.35	---	---




VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	▲ LTMOD	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES

	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	32	31.6	---	---

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0610821
Lab Number : **02643213**
Unique Number : 5800752
Test Package : IND 2 (Additional Tests: BottomAnalysis, FILTERPATCH, PrtFilter)

Skyjack - Plant 2 (div of Linamar)
 201 Woodlawn Rd. W.
 Guelph, ON
 CA N1H 1B8
 Contact: Vishal Kanwar
 vishal.kanwar@skyjack.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (519)837-4895