




# OIL ANALYSIS REPORT

Sample Rating Trend

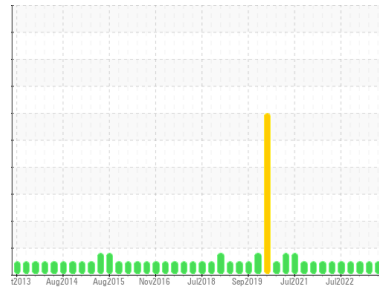

**NORMAL**



Machine Id

**STBD SSG**

Component

**Starboard Diesel Engine**

Fluid

**MOBIL DELVAC 1300 SUPER 15W40 (36 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0711976</b>   | WC0711968   | WC0611591   |
| Sample Date   | Client Info |             | <b>12 Jun 2024</b> | 13 Dec 2023 | 29 Oct 2023 |
| Machine Age   | hrs         | Client Info | <b>19462</b>       | 18558       | 17612       |
| Oil Age       | hrs         | Client Info | <b>500</b>         | 397         | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | N/A         | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|           | method | limit/base    | current | history1     | history2 |    |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron      | ppm    | ASTM D5185(m) | >100    | <b>6</b>     | 8        | 6  |
| Chromium  | ppm    | ASTM D5185(m) | >20     | <b>0</b>     | 0        | 0  |
| Nickel    | ppm    | ASTM D5185(m) | >4      | <b>2</b>     | <1       | 2  |
| Titanium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Silver    | ppm    | ASTM D5185(m) | >3      | <b>&lt;1</b> | <1       | <1 |
| Aluminum  | ppm    | ASTM D5185(m) | >20     | <b>1</b>     | 1        | 2  |
| Lead      | ppm    | ASTM D5185(m) | >40     | <b>&lt;1</b> | <1       | <1 |
| Copper    | ppm    | ASTM D5185(m) | >330    | <b>7</b>     | 1        | 4  |
| Tin       | ppm    | ASTM D5185(m) | >15     | <b>0</b>     | 0        | 0  |
| Antimony  | ppm    | ASTM D5185(m) |         | <b>0</b>     | <1       | 0  |
| Vanadium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Beryllium | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Cadmium   | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |

## ADDITIVES

|            | method | limit/base    | current | history1     | history2 |      |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron      | ppm    | ASTM D5185(m) | 0       | <b>43</b>    | 54       | 47   |
| Barium     | ppm    | ASTM D5185(m) | 0       | <b>&lt;1</b> | <1       | <1   |
| Molybdenum | ppm    | ASTM D5185(m) | 0       | <b>41</b>    | 41       | 41   |
| Manganese  | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 0        | 0    |
| Magnesium  | ppm    | ASTM D5185(m) | 0       | <b>509</b>   | 519      | 506  |
| Calcium    | ppm    | ASTM D5185(m) |         | <b>1646</b>  | 1739     | 1693 |
| Phosphorus | ppm    | ASTM D5185(m) |         | <b>709</b>   | 720      | 709  |
| Zinc       | ppm    | ASTM D5185(m) |         | <b>859</b>   | 872      | 873  |
| Sulfur     | ppm    | ASTM D5185(m) |         | <b>2026</b>  | 2005     | 1996 |
| Lithium    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | <1       | <1   |

## CONTAMINANTS

|           | method | limit/base    | current | history1 | history2 |   |
|-----------|--------|---------------|---------|----------|----------|---|
| Silicon   | ppm    | ASTM D5185(m) | >25     | <b>8</b> | 6        | 4 |
| Sodium    | ppm    | ASTM D5185(m) |         | <b>2</b> | 3        | 3 |
| Potassium | ppm    | ASTM D5185(m) | >20     | <b>0</b> | 0        | 0 |


## INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | ASTM D7844* | >3      | <b>0</b>    | 0        | 0    |
| Nitration | Abs/cm   | ASTM D7624* | >20     | <b>7.5</b>  | 6.7      | 7.7  |
| Sulfation | Abs./1mm | ASTM D7415* | >30     | <b>22.6</b> | 22.6     | 22.9 |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

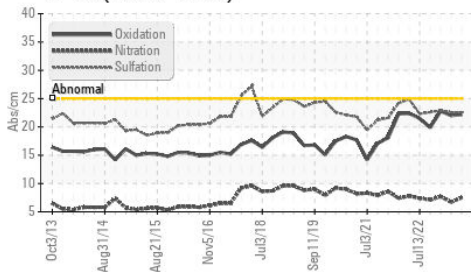

Base Number

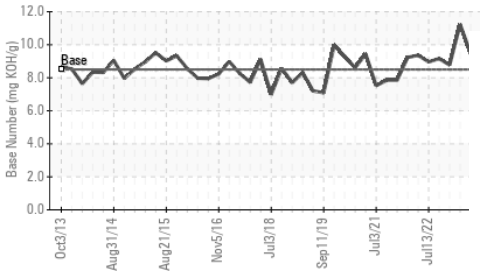

Viscosity @ 100°C

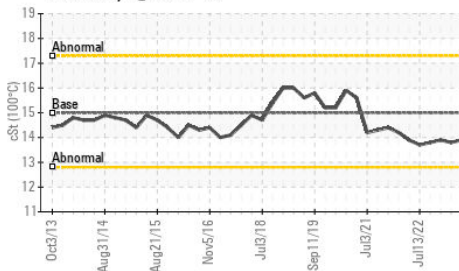


| FLUID DEGRADATION | method   | limit/base  | current | history1    | history2 |      |
|-------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation         | Abs/.1mm | ASTM D7414* | >25     | <b>22.2</b> | 22.0     | 22.8 |
| Base Number (BN)  | mg KOH/g | ASTM D2896* | 8.5     | <b>9.47</b> | 11.23    | 8.77 |

| VISUAL           | method | limit/base | current | history1   | history2 |     |
|------------------|--------|------------|---------|------------|----------|-----|
| Emulsified Water | scalar | Visual*    | >0.2    | <b>NEG</b> | NEG      | NEG |
| Free Water       | scalar | Visual*    |         | <b>NEG</b> | NEG      | NEG |


| FLUID PROPERTIES | method | limit/base    | current | history1    | history2 |      |
|------------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D7279(m) | 15.0    | <b>13.9</b> | 13.8     | 13.9 |

## GRAPHS


Ferrous Alloys

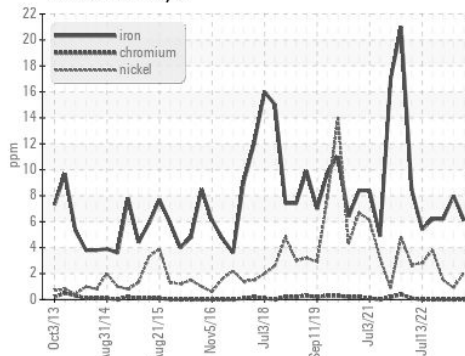


Non-ferrous Metals

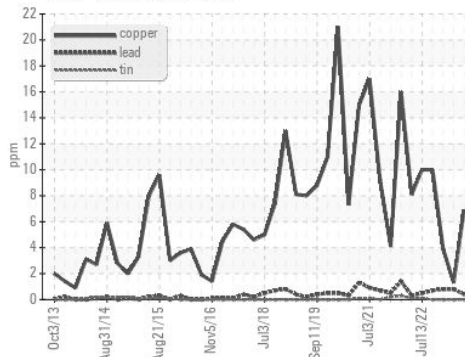

Viscosity @ 100°C

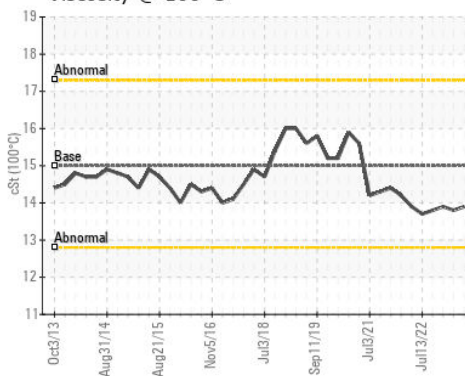

Base Number

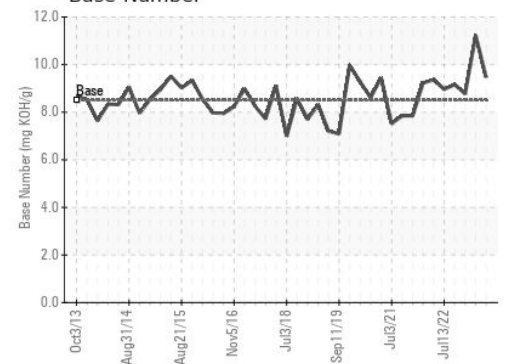

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0711976  
**Lab Number** : **02643313**  
**Unique Number** : 5800852  
**Test Package** : MAR 2

**Canadian Coast Guard - CCGS Constable Carriere**  
 867 Lakeshore Road  
 Burlington, ON  
 CA L7R 4A6

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Chief Engineer  
 constablecarriereCE@ccgs-ngcc.gc.ca  
 T: (705)542-2737  
 F: x: