




# OIL ANALYSIS REPORT

Sample Rating Trend

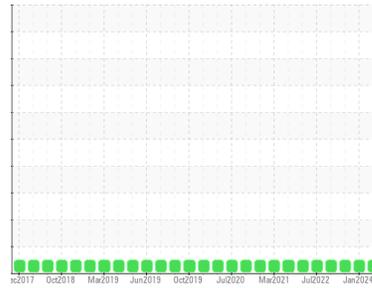

**NORMAL**



Area

**(C-GMME)**

Machine Id

**[C-GMME] CESSNA 172M L-30769-27A**

Component

**Piston Aircraft Engine**

Fluid

**SHELL AEROSHELL W 15W50 MGR (8 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0931003</b>	WC0892292	WC0760301
Sample Date	Client Info		<b>30 May 2024</b>	24 Jan 2024	17 Nov 2022
TSN	hrs	Client Info	<b>0</b>	0	0
TSO	hrs	Client Info	<b>440</b>	342	4497
Oil Age	hrs	Client Info	<b>48</b>	50	50
Oil Changed		Client Info	<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	<b>26</b>	31	20
Chromium	ppm	ASTM D5185(m)	>20	<b>4</b>	6	2
Nickel	ppm	ASTM D5185(m)	>15	<b>2</b>	2	2
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>7</b>	7	4
Lead	ppm	ASTM D5185(m)	>20000	<b>4577</b>	4130	3754
Copper	ppm	ASTM D5185(m)	>25	<b>12</b>	17	17
Tin	ppm	ASTM D5185(m)	>30	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	5	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	10	<b>&lt;1</b>	2	0
Calcium	ppm	ASTM D5185(m)	10	<b>&lt;1</b>	3	<1
Phosphorus	ppm	ASTM D5185(m)	1280	<b>997</b>	1150	1194
Zinc	ppm	ASTM D5185(m)	10	<b>2</b>	6	3
Sulfur	ppm	ASTM D5185(m)	1800	<b>1492</b>	1356	1044
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>5</b>	5	3
Sodium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0






# OIL ANALYSIS REPORT

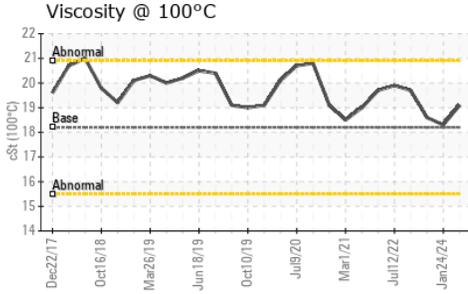

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	.2%
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	<b>19.1</b>	18.3	18.6

## GRAPHS

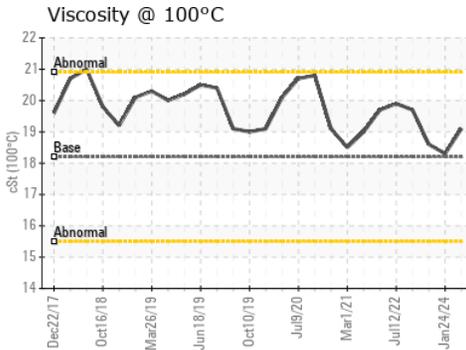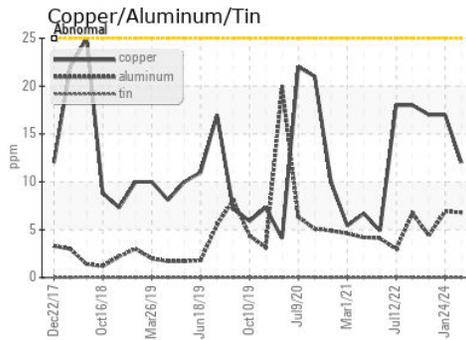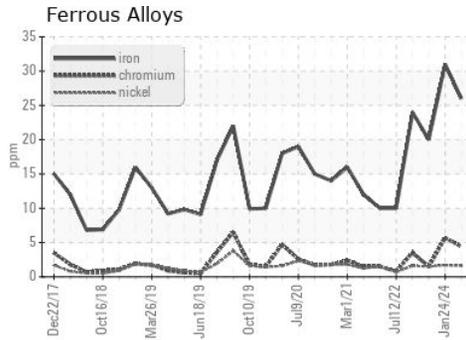

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0931003  
**Lab Number** : **02643392**  
**Unique Number** : 5800931  
**Test Package** : AVI 1

**ROCKCLIFFE FLYING CLUB**  
 1495 SIR GEORGE-ETIENNE, CARTIER PARKWAY MAINTENANCE  
 OTTAWA, ON  
 CA K1K 4Y5  
 Contact: Patrick Giunta  
 maintenance@rfc.ca  
 T: (613)746-4425  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.