

OIL ANALYSIS REPORT

Kingsville Stamping - 888100 **RB035**

Hydraulic System

ACTIVELUBE HYD ISO 320 (--- GAL)

Sample Rating Trend ISO

Recommendation

The sample submitted is 2 times dirtier than the ISO dirt count recommendation of 19/16/14.


Contamination

Particles >6µm and oil cleanliness are notably high.

				Jun2024		
SAMPLE INFORI	MATION	us sales el	line it/lenene	a	histom d	la i a ta uu . O
	VIATION	method	limit/base	current	history1	history2
Department		Client Info		Sales		
Sample From		Client Info		Tote		
Production Stage		Client Info		Virgin		
Sent to WC		Client Info		06/19/2024		
Sample Number		Client Info		E30002440		
Sample Date		Client Info		17 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>20	0		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Γitanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
_ead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	0		
Γin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
/anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		11		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
//agnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		16		
Phosphorus	ppm	ASTM D5185(m)		330		
Zinc	ppm	ASTM D5185(m)		400		
Sulfur	ppm	ASTM D5185(m)		874		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
Nater	%	ASTM D6304*	>0.05	0.001		
opm Water	ppm	ASTM D6304*	>500	9		



OIL ANALYSIS REPORT

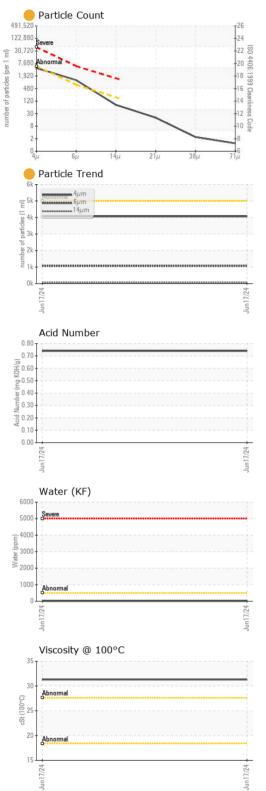

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	4066		
Particles >6µm		ASTM D7647	>640	<u> </u>		
Particles >14µm		ASTM D7647	>160	70		
Particles >21µm		ASTM D7647	>40	17		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	19/17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.74		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		339		
Visc @ 100°C	cSt	ASTM D7279(m)		31.3		
Viscosity Index (VI)	Scale	ASTM D2270*		129		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image





Laboratory Sample No.

: E30002440

Lab Number : 02643400 Unique Number : 5800939

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 21 Jun 2024

Tested : 24 Jun 2024 : 25 Jun 2024 - Aylwin Lee Diagnosed

Test Package : IND 2 (Additional Tests: KF, KV100, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950