

OIL ANALYSIS REPORT

Kingsville Stamping - 888100 **RB036**

Unknown Component

ACTIVE DRAW 225 (--- GAL)

Sample Rating Trend **VISCOSITY**

DIAGNOSIS

Recommendation

PLEASE NOTE: Viscosity does not match the oil

The sample submitted is 2 times dirtier than the ISO dirt count recommendation of 19/16/14.


Contamination

Particles >6µm and oil cleanliness are abnormally high. Particles >4µm are notably high.

				Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Department		Client Info		Sales		
Sample From		Client Info		Drum		
Production Stage		Client Info		Virgin		
Sent to WC		Client Info		06/19/2024		
Sample Number		Client Info		E30002441		
Sample Date		Client Info		17 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		0		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		0		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		<1		
Phosphorus	ppm	ASTM D5185(m)		<1		
Zinc	ppm	ASTM D5185(m)		<1		
Sulfur	ppm	ASTM D5185(m)		129		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.005		
ppm Water	ppm	ASTM D6304*		54		



OIL ANALYSIS REPORT

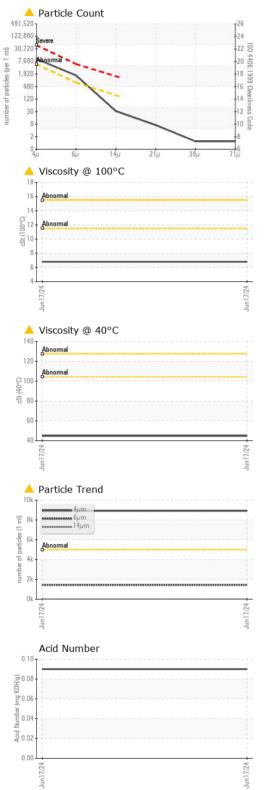

					history2
	ASTM D7647	>5000	8914		
	ASTM D7647	>640	1428		
	ASTM D7647	>160	28		
	ASTM D7647	>40	6		
	ASTM D7647	>10	1		
	ASTM D7647	>3	1		
	ISO 4406 (c)	>19/16/14	<u>^</u> 20/18/12		
FLUID DEGRADATION		limit/base	current	history1	history2
mg KOH/g	ASTM D974*		0.09		
	method	limit/base	current	history1	history2
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NORML	NORML		
scalar	Visual*	NORML	NORML		
scalar	Visual*		NEG		
scalar	Visual*		NEG		
IES	method	limit/base	current	history1	history2
cSt	ASTM D7279(m)		44.8		
cSt	ASTM D7279(m)		△ 6.8		
Scale	ASTM D2270*		106		
3	method	limit/base	current	history1	history2
				no image	no image
				no image	no image
	scalar sc	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c) TION method mg KOH/g ASTM D974* method scalar Visual* scalar ASTM D7279(m) cSt ASTM D7279(m) Scale ASTM D2270*	ASTM D7647 >640 ASTM D7647 >160 ASTM D7647 >40 ASTM D7647 >10 ASTM D7647 >3 ISO 4406 (c) >19/16/14 TION	ASTM D7647 >640	ASTM D7647 >640



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02643401

: E30002441

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 21 Jun 2024

Tested Unique Number : 5800940 Diagnosed

: 25 Jun 2024 - Aylwin Lee Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

: 24 Jun 2024

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950