

OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Hyd. shack # 2 Q400#1 (S/N 8424)

Hydraulic System

ESSO NUTO H ISO 32 (200 GAL)

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

n2011 Mny2012 Mny2013 Nov2014 Jan2016 Ap/2017 Dnx2019 Mny2023									
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		PP0899848	PP	PP			
Sample Date		Client Info		18 Jun 2024	08 Apr 2024	26 Mar 2024			
Machine Age	hrs	Client Info		0	0	0			
Oil Age	hrs	Client Info		0	0	0			
Oil Changed		Client Info		N/A	N/A	N/A			
Sample Status				ATTENTION	NORMAL	NORMAL			
CONTAMINATION	J	method	limit/base	current	history1	history2			
Water		WC Method	>0.05	NEG	NEG	NEG			
WEAR METALS		method	limit/base	current	history1	history2			
ron	ppm	ASTM D5185(m)	>20	1					
Chromium	ppm	ASTM D5185(m)	>10	0					
Nickel	ppm	ASTM D5185(m)	>10	<1					
Titanium	ppm	ASTM D5185(m)		0					
Silver	ppm	ASTM D5185(m)		0					
Aluminum	ppm	ASTM D5185(m)	>10	<1					
_ead	ppm	ASTM D5185(m)	>20	0					
Copper	ppm	ASTM D5185(m)	>20	3					
Γin	ppm	ASTM D5185(m)	>10	0					
Antimony	ppm	ASTM D5185(m)		0					
/anadium	ppm	ASTM D5185(m)		0					
Beryllium	ppm	ASTM D5185(m)		0					
Cadmium	ppm	ASTM D5185(m)		0					
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185(m)	0	<1					
) - ul									
Barium	ppm	ASTM D5185(m)	0	0					
	ppm ppm	ASTM D5185(m) ASTM D5185(m)	0	0					
Molybdenum		()							
Molybdenum Manganese	ppm	ASTM D5185(m)		0					
Molybdenum Manganese Magnesium	ppm	ASTM D5185(m) ASTM D5185(m)	0	0					
Molybdenum Manganese Magnesium Calcium	ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5	0 0 0					
Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5 50	0 0 0 19					
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5 50 330	0 0 0 19 304	 				
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	5 50 330 420	0 0 0 19 304 266					
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 50 330 420	0 0 0 19 304 266 3478					
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 50 330 420 2700	0 0 0 19 304 266 3478					
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 50 330 420 2700	0 0 0 19 304 266 3478 <1	 history1	 history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	5 50 330 420 2700	0 0 0 19 304 266 3478 <1 current	 history1	history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Gulfur Lithium CONTAMINANTS Silicon Godium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	0 5 50 330 420 2700 limit/base >15	0 0 0 19 304 266 3478 <1 current 0	history1	history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	0 5 50 330 420 2700 limit/base >15 >20	0 0 0 19 304 266 3478 <1 current 0 3	history 1	history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) MASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	0 5 50 330 420 2700 limit/base >15 >20 limit/base	0 0 0 19 304 266 3478 <1 current 0 3 2	history1 history1	history2 history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	0 5 50 330 420 2700 limit/base >15 >20 limit/base >320	0 0 0 19 304 266 3478 <1 current 0 3 2 current	history1 history1	history2 history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m)	0 5 50 330 420 2700 limit/base >15 >20 limit/base >320 >80	0 0 19 304 266 3478 <1 current 0 3 2 current 258 100	history1 history1	history2 history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) MEthod ASTM D5185(m) ASTM D7647 ASTM D7647	0 5 50 330 420 2700 limit/base >15 >20 limit/base >320 >80 >10	0 0 19 304 266 3478 <1 current 0 3 2 current 258 100 12	history1 history1	history2 history2			
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) METHOD ASTM D5185(m) METHOD ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647	0 5 50 330 420 2700 limit/base >15 >20 limit/base >320 >80 >10 >3	0 0 0 19 304 266 3478 <1 current 0 3 2 current 258 100 12 3	history1 history1	history2 history2			



OIL ANALYSIS REPORT

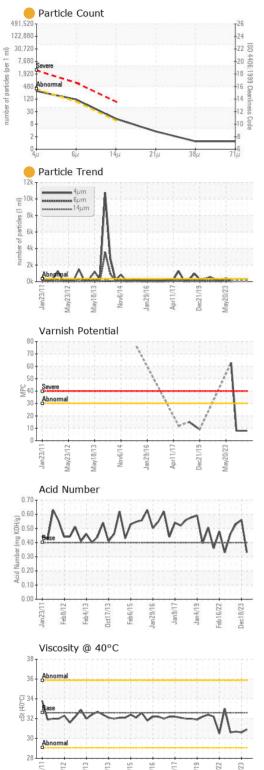

FILUD DECDADA	TION	on a the e of	line it /le e e e		la i a ta mud	hiotow.O
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	.40	0.33		
MPC Varnish Potential	Scale	ASTM D7843(m)*	>15	8	8	8
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32.6	30.9		
SAMPLE IMAGES	}	method	limit/base	current	history1	history2
Color						
Bottom					O O O O O O O O O O O O O O O O O O O	
MPC						994



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02643402 Unique Number : 5800941 Test Package : IND 2 (Additional Tests: MPC)

: PP0899848

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received

: 21 Jun 2024 **Tested** : 24 Jun 2024 Diagnosed : 24 Jun 2024 - Wes Davis

FLIGHTSAFETY CANADA LIMITED

95 GARRATT BOULEVARD TORONTO, ON CA M3K 2A5

Contact: Mark Gris mark.gris@flightsafety.com T: (416)638-9313

F: (416)638-3348

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.





Report Id: FLITOR [WCAMIS] 02643402 (Generated: 06/24/2024 13:10:31) Rev: 1

This page left intentionally blank