

# **OIL ANALYSIS REPORT**

Sample Rating Trend

WEAR

Area **[177499] M-700** Component **Gearbox** Fluid **{not provided} (1 GAL)** 

## DIAGNOSIS

#### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### 🔺 Wear

PQ levels are abnormal. Iron ppm levels are abnormal. Gear wear is indicated. The high ferrous density (PQ) index indicates that abnormal wear is occurring.

### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0898870		
Sample Date		Client Info		19 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<u> </u>		
Iron	ppm	ASTM D5185(m)	>200	<u> </u>		
Chromium	ppm	ASTM D5185(m)	>10	8		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		<1		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	<1		
Lead	ppm	ASTM D5185(m)	>50	0		
Copper	ppm	ASTM D5185(m)	>200	2		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		2		
Barium	ppm	ASTM D5185(m)		2		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		4		
Magnesium	ppm	ASTM D5185(m)		1		
Calcium	ppm	ASTM D5185(m)		8		
Phosphorus	ppm	ASTM D5185(m)		164		
Zinc	ppm	ASTM D5185(m)		1		
Sulfur	ppm	ASTM D5185(m)		402		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	13		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.20		



Pio 0.0

0.00

30

25

150

100


(40°( 200


cSt(

Viscosity @ 40°C

ormal A

# **OIL ANALYSIS REPORT**

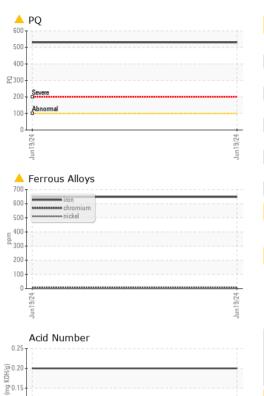

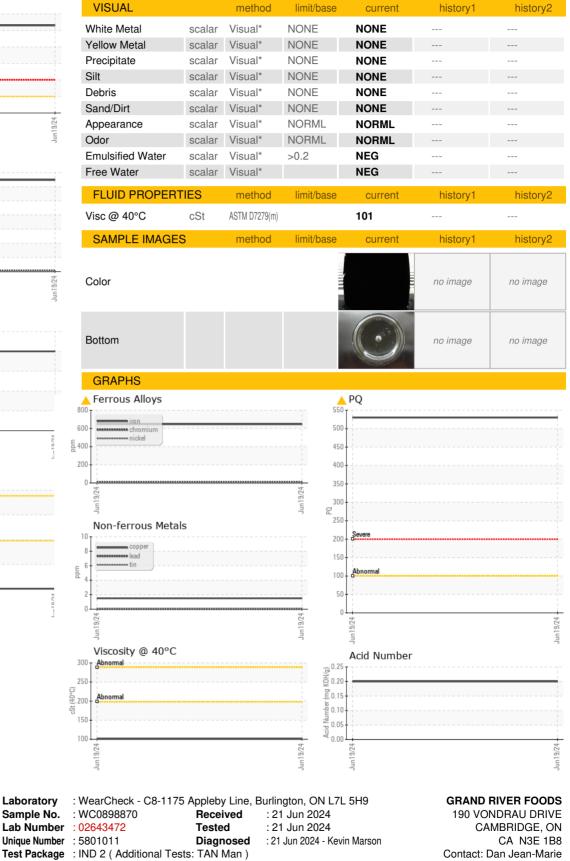

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

5

Laboratory

Sample No.

Lab Number

djeanmarie@grandriverfoods.com T: (519)653-3577 E:

Report Id: GRA685CAM [WCAMIS] 02643472 (Generated: 06/21/2024 16:28:53) Rev: 1

CALA

ISO 17025:2017 Accredited

Laboratory

Contact/Location: Dan Jean-Marie - GRA685CAM