




# OIL ANALYSIS REPORT

Sample Rating Trend

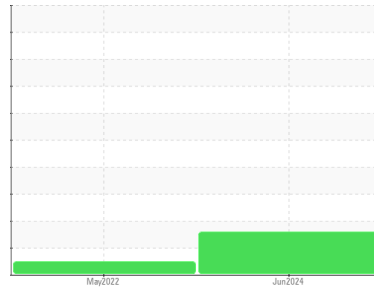

WEAR PARTICLES



Area  
**CWPI**  
 Machine Id  
**QUEBEC COH - QUEBEC**  
 Component  
**Gearbox**  
 Fluid  
**PHILLIPS 150 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

Wear particle analysis indicates that the ferrous cutting particles are marginal. All other component wear rates are normal. Cutting wear particles are caused by either hard protuberances (mis-aligned components, etc.), or abrasives entering the system and embedding themselves in softer materials (sand, etc.), and gouging out mating surfaces.

### Contaminants

There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0815874</b>	WC0612308	---
Sample Date	Client Info		<b>05 Jun 2024</b>	04 May 2022	---
Machine Age	yrs	Client Info	<b>0</b>	16	---
Oil Age	yrs	Client Info	<b>0</b>	1	---
Oil Changed	Client Info		<b>N/A</b>	Not Changd	---
Sample Status			<b>MARGINAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	---
Iron	ppm	ASTM D5185(m) >200	<b>3</b>	2	---
Chromium	ppm	ASTM D5185(m) >15	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185(m) >100	<b>&lt;1</b>	1	---
Copper	ppm	ASTM D5185(m) >200	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185(m) >25	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>52</b>	56	---
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185(m)	<b>2</b>	2	---
Phosphorus	ppm	ASTM D5185(m)	<b>292</b>	325	---
Zinc	ppm	ASTM D5185(m)	<b>2</b>	2	---
Sulfur	ppm	ASTM D5185(m)	<b>6545</b>	6832	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>3</b>	3	---
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	---
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	<1	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.69</b>	0.09	---




# OIL ANALYSIS REPORT

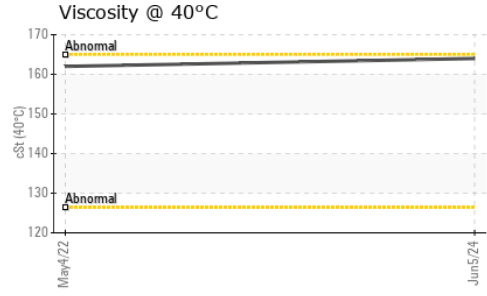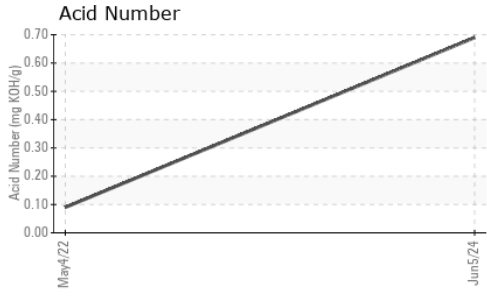






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	164	162	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

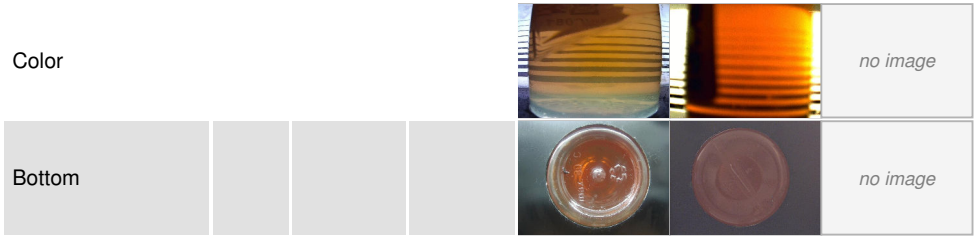

## GRAPHS

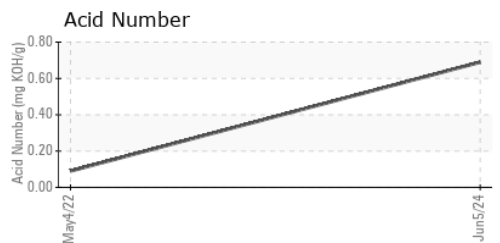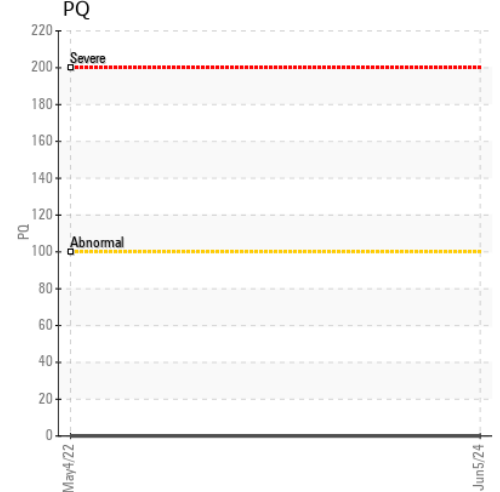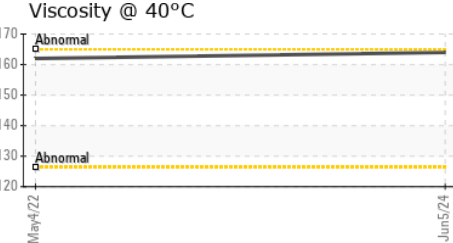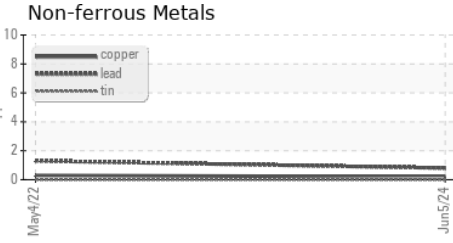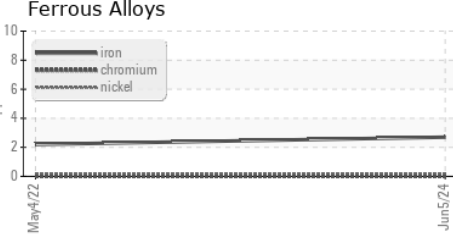

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0815874      **Received** : 21 Jun 2024  
**Lab Number** : 02643484      **Tested** : 27 Jun 2024  
**Unique Number** : 5801023      **Diagnosed** : 27 Jun 2024 - Kevin Marson  
**Test Package** : IND 3 ( Additional Tests: TAN Man )




**Portage Power - Energy Ottawa**  
 4 Booth Street  
 Ottawa, ON  
 CA K1R 6K8  
 Contact: Cheryl Gharib  
 info@portagepower.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:   
 F: x

# FERROGRAPHY REPORT

Area  
**CWPI**  
 Machine Id  
**QUEBEC COH - QUEBEC**  
 Component  
**Gearbox**  
 Fluid  
**PHILLIPS 150 (--- GAL)**

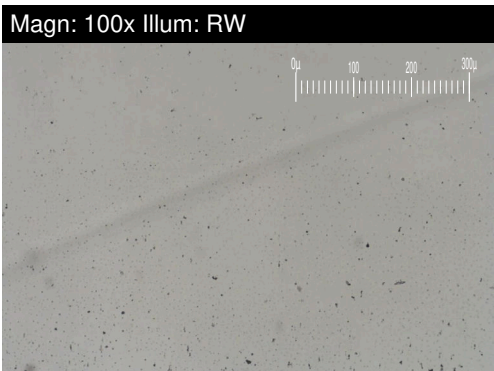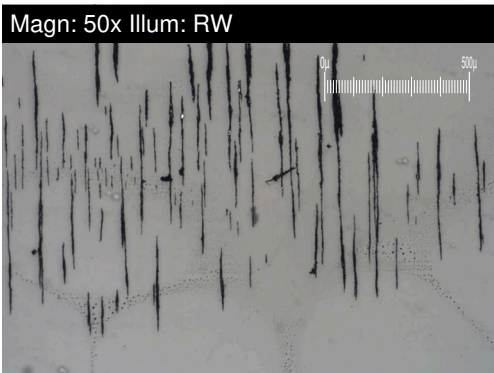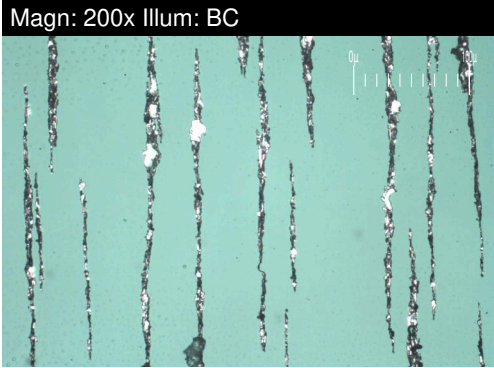


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>28.5</b>	44.2	---
Small Particles		DR-Ferr*		<b>9.5</b>	12.8	---
Total Particles		DR-Ferr*	>---	<b>38</b>	57	---
Large Particles Percentage	%	DR-Ferr*		<b>50</b>	55.1	---
Severity Index		DR-Ferr*		<b>542</b>	1388	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<b>3</b>	3	
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*		▲ <b>1</b>		
Ferrous Rolling	Scale 0-10	ASTM D7684*		■ <b>1</b>	1	
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		■ <b>1</b>	1	
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*		■ <b>1</b>	1	
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		■ <b>1</b>	1	
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		■ <b>1</b>	1	

### WEAR

Wear particle analysis indicates that the ferrous cutting particles are marginal. All other component wear rates are normal. Cutting wear particles are caused by either hard protuberances (mis-aligned components, etc.), or abrasives entering the system and embedding themselves in softer materials (sand, etc.), and gouging out mating surfaces.

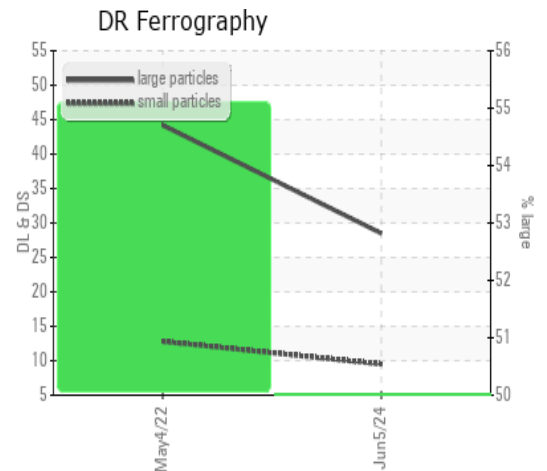

*This page left intentionally blank*