



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Area  
**F F Soucy - 888047**  
 Machine Id  
**PG100**  
 Component  
**Unknown Component**  
 Fluid  
**TOTAL HISOLA ZS 220 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 We certify this oil to be clean and dry.






SAMPLE INFORMATION		method	limit/base	current	history1	history2
Machine ID	Client Info			<b>New Oil Tank</b>	---	---
Department	Client Info			<b>Sales</b>	---	---
Sample From	Client Info			<b>Machine</b>	---	---
Production Stage	Client Info			<b>Virgin</b>	---	---
Sent to WC	Client Info			<b>06/19/2024</b>	---	---
Sample Number	Client Info			<b>E30002444</b>	---	---
Sample Date	Client Info			<b>13 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		<b>0</b>	---	---
Chromium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)		<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)		<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>1</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>119</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>690</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>918</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>1741</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<b>0</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Water	%	ASTM D6304*		<b>0.001</b>	---	---
ppm Water	ppm	ASTM D6304*		<b>7</b>	---	---

# OIL ANALYSIS REPORT

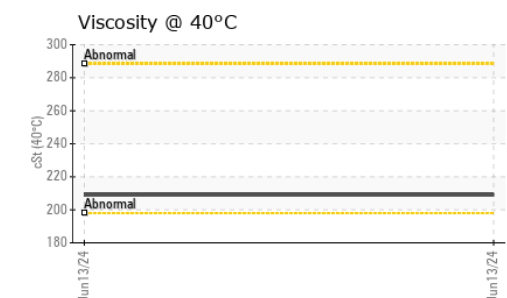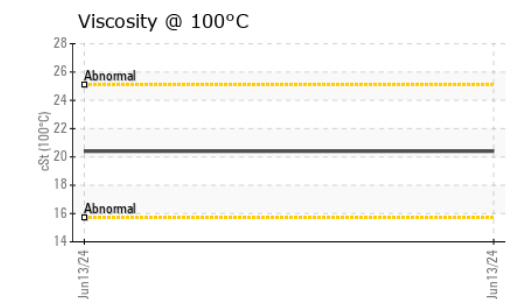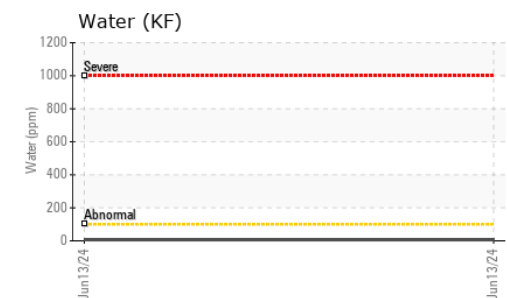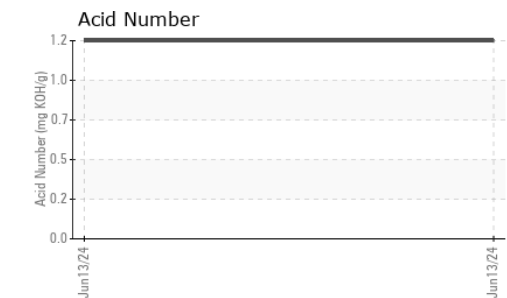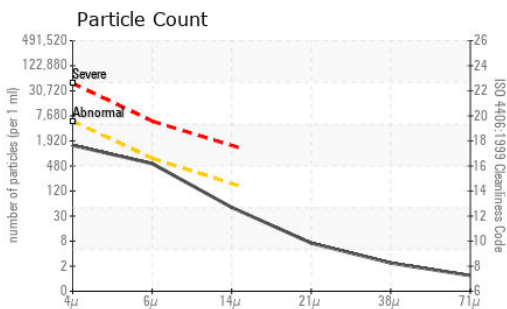

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>1319</b>	---	---
Particles >6µm	ASTM D7647	>640	<b>482</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>43</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>6</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>2</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	<b>18/16/13</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>1.20</b>	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---
Emulsified Water	scalar	Visual*	<b>NEG</b>	---	---
Free Water	scalar	Visual*	<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>209</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	<b>20.4</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	<b>113</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : E30002444  
**Lab Number** : **02643490**  
**Unique Number** : 5801029  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PrtCount, TAN Man, VI )

**Environmental 360 Solutions Ltd.**  
 640 Victoria Street  
 Cobourg, ON  
 CA K9A 5H5  
 Contact: Tatiana Sorkina  
 tsorkina@e360s.ca  
 T: (800)263-3939  
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.