OIL ANALYSIS REPORT

Sample Rating Trend

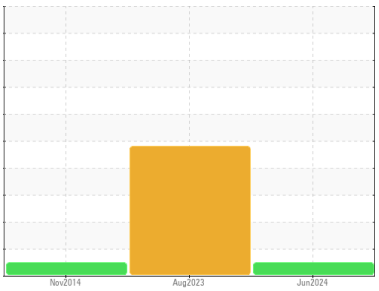

NORMAL

Machine Id
EURODRIVE R92 #2 ELEVATOR GEARBOX
Component
Gearbox
Fluid
CHEVRON TEGRA SYN GEAR ISO 220 (6 LTR)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0951878**	WC0795502	WC925163
Sample Date		Client Info		**19 Jun 2024**	09 Aug 2023	03 Nov 2014
Machine Age	hrs	Client Info		**0**	0	62747
Oil Age	hrs	Client Info		**0**	0	31969
Oil Changed		Client Info		**Not Changd**	Not Changd	Not Changd
Sample Status				**NORMAL**	SEVERE	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.2	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		**53**	71	0
Iron	ppm	ASTM D5185(m)	>200	**40**	93	7
Chromium	ppm	ASTM D5185(m)	>15	**<1**	1	0
Nickel	ppm	ASTM D5185(m)	>15	**<1**	0	0
Titanium	ppm	ASTM D5185(m)		**0**	<1	0
Silver	ppm	ASTM D5185(m)		**<1**	0	0
Aluminum	ppm	ASTM D5185(m)	>25	**<1**	4	<1
Lead	ppm	ASTM D5185(m)	>100	**0**	0	0
Copper	ppm	ASTM D5185(m)	>200	**<1**	<1	<1
Tin	ppm	ASTM D5185(m)	>25	**0**	0	0
Antimony	ppm	ASTM D5185(m)	>5	**0**	0	<1
Vanadium	ppm	ASTM D5185(m)		**0**	0	0
Beryllium	ppm	ASTM D5185(m)		**0**	0	0
Cadmium	ppm	ASTM D5185(m)		**0**	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		**1**	2	2
Barium	ppm	ASTM D5185(m)		**0**	<1	0
Molybdenum	ppm	ASTM D5185(m)		**0**	1	0
Manganese	ppm	ASTM D5185(m)		**<1**	<1	<1
Magnesium	ppm	ASTM D5185(m)		**3**	58	<1
Calcium	ppm	ASTM D5185(m)		**11**	22	22
Phosphorus	ppm	ASTM D5185(m)		**389**	387	384
Zinc	ppm	ASTM D5185(m)		**5**	14	<1
Sulfur	ppm	ASTM D5185(m)		**2338**	4956	2286
Lithium	ppm	ASTM D5185(m)		**<1**	2	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	**20**	▲ 145	17
Sodium	ppm	ASTM D5185(m)		**1**	9	0
Potassium	ppm	ASTM D5185(m)	>20	**<1**	2	1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		**0.80**	0.68	0.895

OIL ANALYSIS REPORT

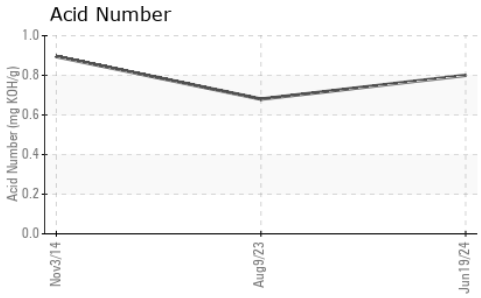

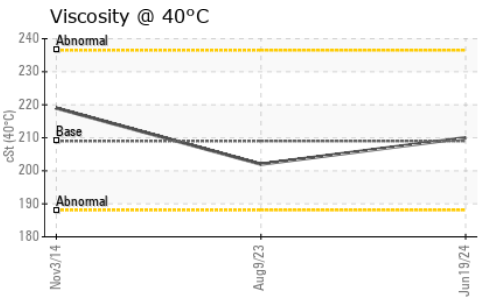

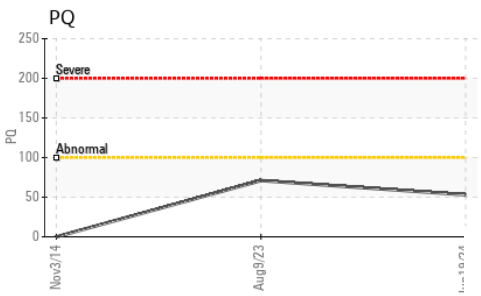

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**VLITE**	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Precipitate	scalar	Visual*	NONE	**NONE**	NONE	NONE
Silt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Debris	scalar	Visual*	NONE	**NONE**	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Appearance	scalar	Visual*	NORML	**NORML**	NORML	NORML
Odor	scalar	Visual*	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	**NEG**	NEG	NEG
Free Water	scalar	Visual*		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	209	**210**	202	219

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

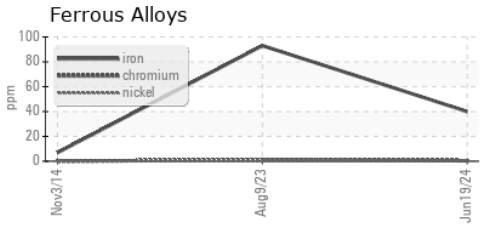

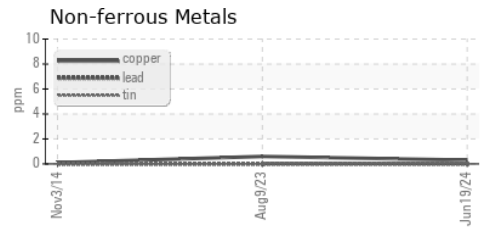

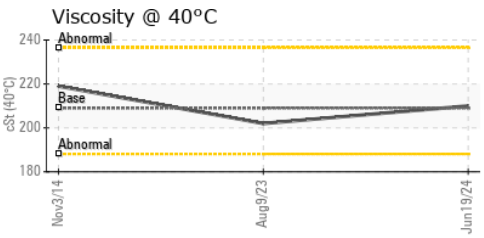

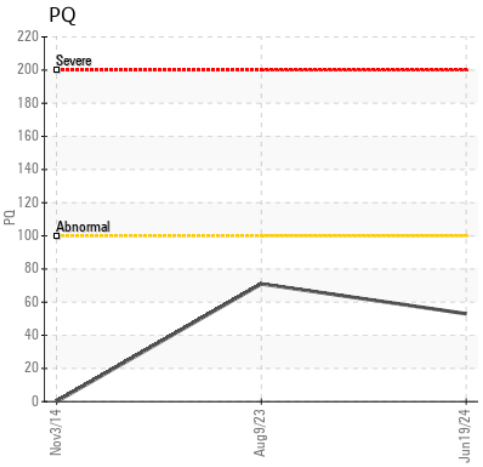

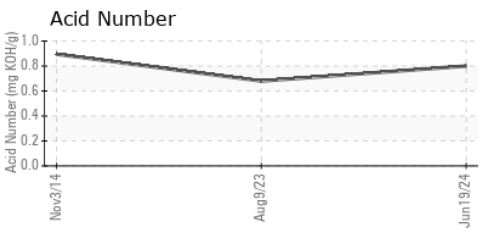

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0951878 **Received** : 21 Jun 2024
Lab Number : 02643500 **Tested** : 21 Jun 2024
Unique Number : 5801039 **Diagnosed** : 21 Jun 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

CARMEUSE LIME CANADA LTD.
BOX 1690,, HWY 17 EAST
BLIND RIVER, ON
CA P0R 1B0
Contact: Rejean Baillargeon
rejean.baillargeon@carmeusena.com
T: (705)849-2201
F: (705)849-2355