

OIL ANALYSIS REPORT

Infasco - 102400 A2406128

Unknown Component

FORM & LUBE (--- GAL)

Sample Rating Trend **WEAR**

DIAGNOSIS

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.


Wear

Copper and iron ppm levels are noted.

		L	,	Jun 2024		
SAMPLE INFORM	MATION	method	limit/base	ourront	history1	hictory?
	MATION		IIIIIII/Dase	current		history2
Batch #		Client Info		2024 05 0911		
Department		Client Info		Production Machine		
Sample From		Client Info				
Production Stage Sent to WC		Client Info		Final 06/19/2024		
Sample Number		Client Info		E30002450		
Sample Number		Client Info		19 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status		Ollotte IIIIo		ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		452		
Chromium	ppm	ASTM D5185(m)		<1		
Nickel	ppm	ASTM D5185(m)		10		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		4		
Lead	ppm	ASTM D5185(m)		2		
Copper	ppm	ASTM D5185(m)		9 79		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		<1		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		5		
Magnesium	ppm	ASTM D5185(m)		5		
Calcium	ppm	ASTM D5185(m)		340		
Phosphorus	ppm	ASTM D5185(m)		285		
Zinc	ppm	ASTM D5185(m)		57		
Sulfur	ppm	ASTM D5185(m)		1973		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	,	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		4		
Sodium	ppm	ASTM D5185(m)		4		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.009		
ppm Water	ppm	ASTM D6304*		91		



OIL ANALYSIS REPORT

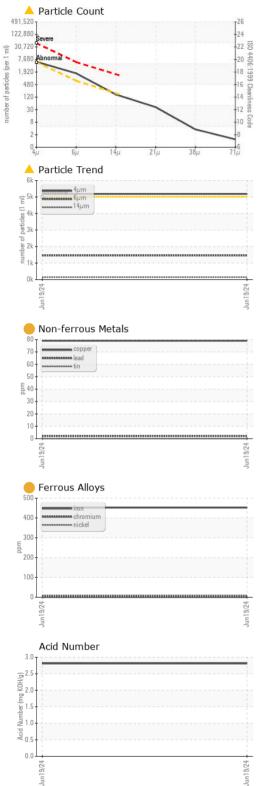

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	5187		
Particles >6µm		ASTM D7647	>640	<u> </u>		
Particles >14µm		ASTM D7647	>160	140		
Particles >21µm		ASTM D7647	>40	35		
Particles >38µm		ASTM D7647	>10	3		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	<u>^</u> 20/18/14		
FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		2.81		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		186		
Visc @ 100°C	cSt	ASTM D7279(m)		17.4		
Viscosity Index (VI)	Scale	ASTM D2270*		100		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: E30002450 Lab Number : 02643518

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received

: 21 Jun 2024 **Tested** : 25 Jun 2024

: 02 Jul 2024 - Aylwin Lee Unique Number : 5801057 Diagnosed Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950