




OIL ANALYSIS REPORT

Sample Rating Trend

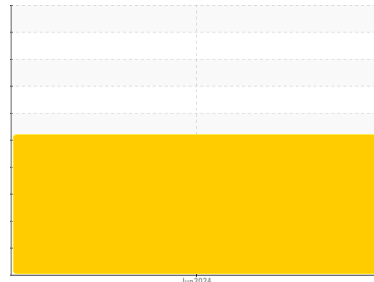

FUEL



Area

[1034]

Machine Id

HATZ 1840622 002662

Component

Diesel Engine

Fluid

{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. There is a trace of moisture present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Test for glycol is negative. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0957977	---	---
Sample Date	Client Info	21 Jun 2024	---	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	N/A	---	---
Sample Status		SEVERE	---	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>100	17	---	---
Chromium	ppm	ASTM D5185(m)	>20	1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	8	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Antimony	ppm	ASTM D5185(m)		<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)		266	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		74	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)		271	---	---
Calcium	ppm	ASTM D5185(m)		1134	---	---
Phosphorus	ppm	ASTM D5185(m)		735	---	---
Zinc	ppm	ASTM D5185(m)		871	---	---
Sulfur	ppm	ASTM D5185(m)		2230	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>25	▲ 31	---	---
Sodium	ppm	ASTM D5185(m)		3	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel	%	ASTM D7593*	>5	▲ 28	---	---
Water	%	ASTM D6304*	>0.2	▲ 0.132	---	---
ppm Water	ppm	ASTM D6304*	>2000	▲ 1328	---	---
Glycol	%	ASTM D7922*		0.0	---	---

INFRA-RED






method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.5	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.6	---	---











OIL ANALYSIS REPORT

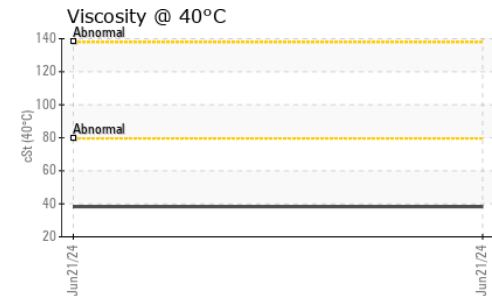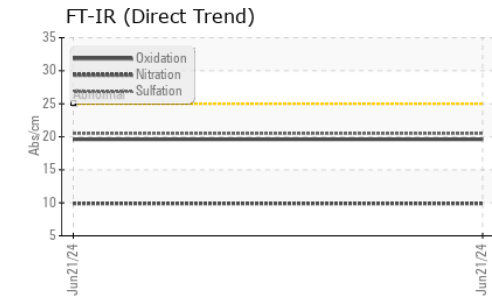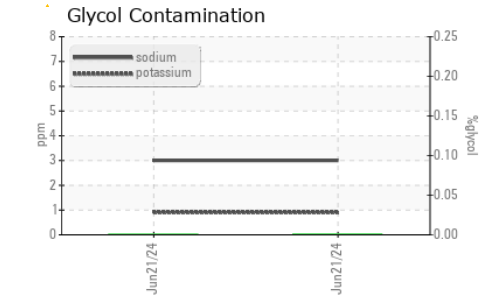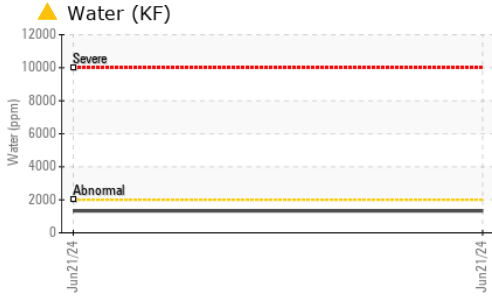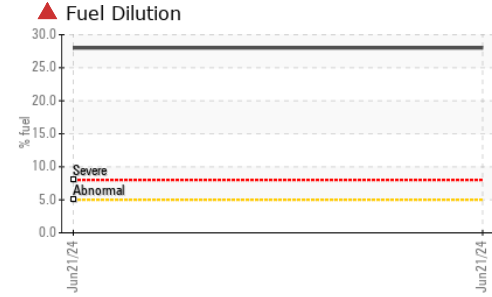

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	▲.5%	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	38.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	140	---	---

GRAPHS

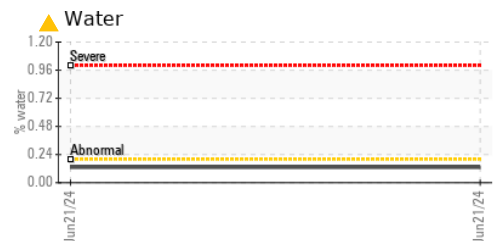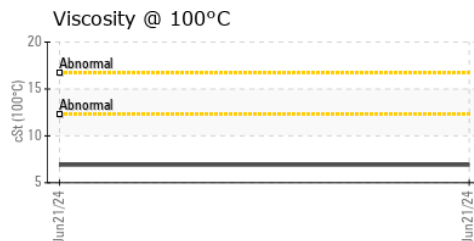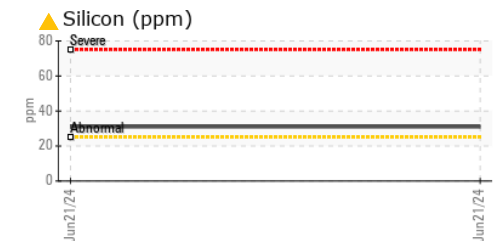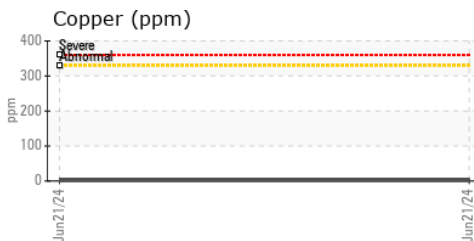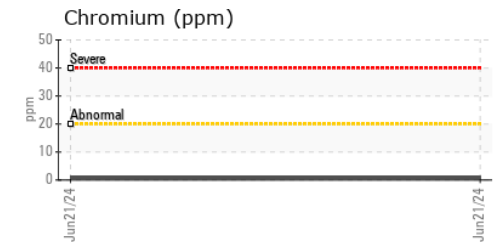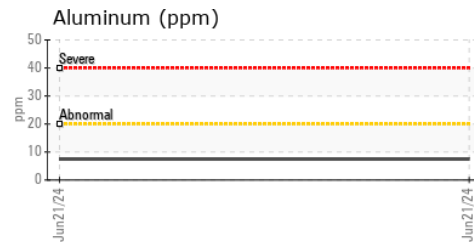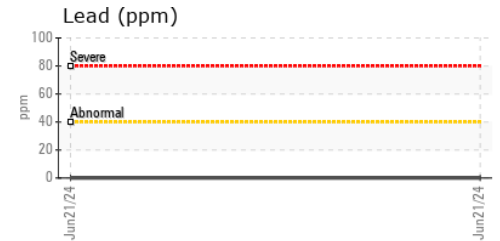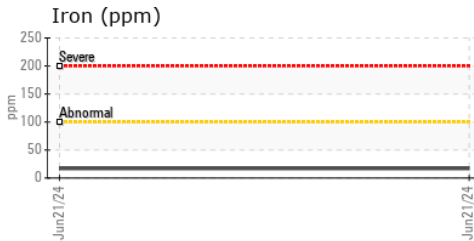

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0957977 **Received** : 24 Jun 2024
Lab Number : 02643613 **Tested** : 25 Jun 2024
Unique Number : 5801152 **Diagnosed** : 26 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, Glycol, KF, KV40, PercentFuel, VI, Visual)

MARINDUSTRIAL
 4090 Ridgeway Drive, Unit 8
 Mississauga, ON
 CA L5L 5X5
 Contact: Chantal Kelly
 ckelly@marind.ca
 T: (905)607-5052
 F: (905)607-8013

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.