


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id **SL09** Component **Rear Right Planetary** Fluid **SAE 75W140 (--- GAL)**

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION method limit/base current history1 history2					Jun2024		
Sample Number Client Info WC0952392							
Sample Date Client Info 17 Jun 2024	SAMPLE INFORM	MATION	method				history2
Machine Age hrs Client Info 9989	Sample Number		Client Info		WC0952392		
Oil Age hrs Client Info 500	•		Client Info		17 Jun 2024		
Oil Changed Sample Status Client Info Not Changd NORMAL	Machine Age	hrs	Client Info		9989		
Sample Status	Oil Age	hrs	Client Info		500		
CONTAMINATION method limit/base current history1 history2 Water WC Method >0.2 NEG WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185(m) >500 62 Chromium ppm ASTM D5185(m) >10 <1 Nickel ppm ASTM D5185(m) >10 <1 Silver ppm ASTM D5185(m) >0 Aluminum ppm ASTM D5185(m) >25 1 Aluminum ppm ASTM D5185(m) >25 0 Lead ppm ASTM D5185(m) >10 0 April MD5185(m) >5 0 Tin ppm ASTM D5185(m) 0 V	Oil Changed		Client Info		Not Changd		
Water WC Method >0.2 NEG WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185(m) >500 62 Chromium ppm ASTM D5185(m) >10 <1 Nickel ppm ASTM D5185(m) >10 <1 Titanium ppm ASTM D5185(m) 0 Silver ppm ASTM D5185(m) >25 1 Aluminum ppm ASTM D5185(m) >25 0 Aluminum ppm ASTM D5185(m) >75 <1 Copper ppm ASTM D5185(m) >10 0 Vanadium ppm ASTM D5185(m) 0 Vanadium ppm ASTM D5185(m) 0	Sample Status				NORMAL		
WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185(m) >500 62 Chromium ppm ASTM D5185(m) >10 <1	CONTAMINATIO	N	method	limit/base	current	history1	history2
Iron	Water		WC Method	>0.2	NEG		
Chromium ppm ASTM D5185(m) > 10 <1 Nickel ppm ASTM D5185(m) > 10 <1	WEAR METALS		method	limit/base	current	history1	history2
Nickel	Iron	ppm	ASTM D5185(m)	>500	62		
Titanium ppm ASTM D5185(m) 0 Silver ppm ASTM D5185(m) 0 Aluminum ppm ASTM D5185(m) >25 1 Lead ppm ASTM D5185(m) >75 <1	Chromium	ppm	ASTM D5185(m)	>10	<1		
Silver	Nickel	ppm	ASTM D5185(m)	>10	<1		
Aluminum	Titanium	ppm	ASTM D5185(m)		0		
Lead ppm ASTM D5185(m) >25 0 Copper ppm ASTM D5185(m) >75 <1	Silver	ppm	ASTM D5185(m)		0		
Copper ppm ASTM D5185(m) >75 <1 Tin ppm ASTM D5185(m) >10 0 Antimony ppm ASTM D5185(m) >5 0 Vanadium ppm ASTM D5185(m) 0 Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 166 Boron ppm ASTM D5185(m) 1 Barium ppm ASTM D5185(m) 0 Molybdenum ppm ASTM D5185(m) 0 Magnesium ppm ASTM D5185(m) 17 Calcium ppm ASTM D5185(m)	Aluminum	ppm	ASTM D5185(m)	>25	1		
Tin ppm ASTM D5185(m) >10 0 Antimony ppm ASTM D5185(m) >5 0 Yanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 166 Barium ppm ASTM D5185(m) 0 Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) 1 Magnesium ppm ASTM D5185(m) 1 Calcium ppm ASTM D5185(m) 17 Calcium ppm ASTM D5185(m) 17 Phosphorus ppm ASTM D5185(m) 1286 Zinc ppm ASTM D5185(m) 19388 Sulfur ppm ASTM D5185(m) 19388 CONTAMINANTS method limit/base current history1 history2 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) >75 3	Lead	ppm	ASTM D5185(m)	>25	0		
Antimony ppm ASTM D5185(m) >5 0 Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 166 Barium ppm ASTM D5185(m) 0 Molybdenum ppm ASTM D5185(m) 0 Magnesium ppm ASTM D5185(m) 1 Magnesium ppm ASTM D5185(m) 17 Phosphorus ppm ASTM D5185(m) 1286 Zinc ppm ASTM D5185(m) 19388 Sulfur ppm ASTM D5185(m) <1	Copper	ppm	ASTM D5185(m)	>75	<1		
Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 166 Barium ppm ASTM D5185(m) 0 Molybdenum ppm ASTM D5185(m) 0 Magnesium ppm ASTM D5185(m) 1 Magnesium ppm ASTM D5185(m) 17 Calcium ppm ASTM D5185(m) 1286 Phosphorus ppm ASTM D5185(m) 19388 Sulfur ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current	Tin	ppm	ASTM D5185(m)	>10	0		
Beryllium	Antimony	ppm	ASTM D5185(m)	>5	0		
Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 166 Barium ppm ASTM D5185(m) <1	Vanadium	ppm	ASTM D5185(m)		0		
ADDITIVES	Beryllium	ppm	ASTM D5185(m)		0		
Boron ppm ASTM D5185(m) 166 Barium ppm ASTM D5185(m) <1	Cadmium	ppm	ASTM D5185(m)		0		
Barium ppm ASTM D5185(m) <1	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) <1 Magnesium ppm ASTM D5185(m) 17 Calcium ppm ASTM D5185(m) 1286 Phosphorus ppm ASTM D5185(m) 34 Zinc ppm ASTM D5185(m) 19388 Sulfur ppm ASTM D5185(m) <1 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) 37	Boron	ppm	ASTM D5185(m)		166		
Manganese ppm ASTM D5185(m) <1 Magnesium ppm ASTM D5185(m) 1 Calcium ppm ASTM D5185(m) 17 Phosphorus ppm ASTM D5185(m) 1286 Zinc ppm ASTM D5185(m) 34 Sulfur ppm ASTM D5185(m) 19388 Lithium ppm ASTM D5185(m) <1	Barium	ppm	ASTM D5185(m)		<1		
Magnesium ppm ASTM D5185(m) 1 Calcium ppm ASTM D5185(m) 17 Phosphorus ppm ASTM D5185(m) 1286 Zinc ppm ASTM D5185(m) 34 Sulfur ppm ASTM D5185(m) 19388 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) 37	Molybdenum	ppm	ASTM D5185(m)		0		
Calcium ppm ASTM D5185(m) 17 Phosphorus ppm ASTM D5185(m) 1286 Zinc ppm ASTM D5185(m) 34 Sulfur ppm ASTM D5185(m) 19388 Lithium ppm ASTM D5185(m) <1	Manganese	ppm	ASTM D5185(m)		<1		
Phosphorus ppm ASTM D5185(m) 1286 Zinc ppm ASTM D5185(m) 34 Sulfur ppm ASTM D5185(m) 19388 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) 37	Magnesium	ppm	ASTM D5185(m)		1		
Zinc ppm ASTM D5185(m) 34 Sulfur ppm ASTM D5185(m) 19388 Lithium ppm ASTM D5185(m) <1	Calcium	ppm	ASTM D5185(m)		17		
Sulfur ppm ASTM D5185(m) 19388 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) 37	Phosphorus	ppm	ASTM D5185(m)		1286		
Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) 37	Zinc	ppm	. ,		34		
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) 37	Sulfur	ppm	ASTM D5185(m)		19388		
Silicon ppm ASTM D5185(m) >75 3 Sodium ppm ASTM D5185(m) 37	Lithium	ppm	ASTM D5185(m)		<1		
Sodium ppm ASTM D5185(m) 37	CONTAMINANTS	\$	method	limit/base	current	history1	history2
Sodium ppm ASTM D5185(m) 37	Silicon	ppm	ASTM D5185(m)	>75	3		
Potassium ppm ASTM D5185(m) >20 <1	Sodium		ASTM D5185(m)		37		
	Potassium	ppm	ASTM D5185(m)	>20	<1		



OIL ANALYSIS REPORT

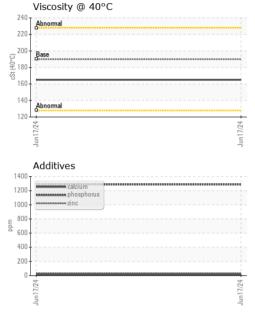

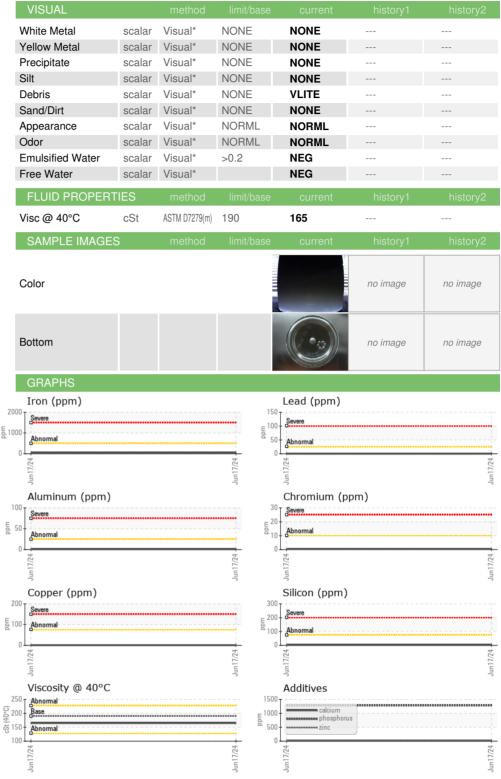



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02643814

: WC0952392 Unique Number : 5801353 Test Package : MOB 1

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Received **Tested** Diagnosed

: 24 Jun 2024 : 24 Jun 2024 : 24 Jun 2024 - Wes Davis

1350 Government Rd. W, MACASSA COMPLEX Kirkland Lake, ON CA P2N 3J1

Agnico Eagle Canada

Contact: Mitch Lamontagne AEM_KL_macassaoilsampleresults@agnicoeagle.com

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F: (705)567-5221 Contact/Location: Mitch Lamontagne - KIR370KIR

T: (705)567-5208