




# OIL ANALYSIS REPORT

## Sample Rating Trend

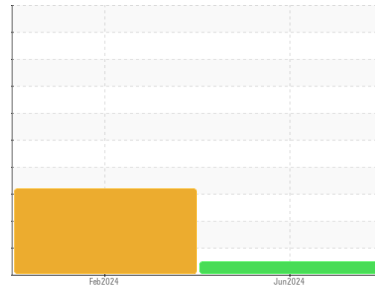

**NORMAL**



Machine Id

**#7 SCREW**

Component

**Gearbox**

Fluid

**MOBIL MOBILGEAR SHC 220 (--- LTR)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0886537</b>	WC0886523	---
Sample Date	Client Info			<b>19 Jun 2024</b>	01 Feb 2024	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	45	---
Iron	ppm	ASTM D5185(m)	>200	<b>18</b>	▲ 227	---
Chromium	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	11	---
Nickel	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	4	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	8	---
Lead	ppm	ASTM D5185(m)	>100	<b>0</b>	0	---
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185(m)	>25	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>2</b>	15	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	2	---
Magnesium	ppm	ASTM D5185(m)		<b>3</b>	● 44	---
Calcium	ppm	ASTM D5185(m)		<b>80</b>	● 985	---
Phosphorus	ppm	ASTM D5185(m)		<b>404</b>	349	---
Zinc	ppm	ASTM D5185(m)		<b>2</b>	18	---
Sulfur	ppm	ASTM D5185(m)		<b>1848</b>	6549	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	3	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>27</b>	▲ 75	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	2	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	4	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.66</b>	0.08	---




# OIL ANALYSIS REPORT

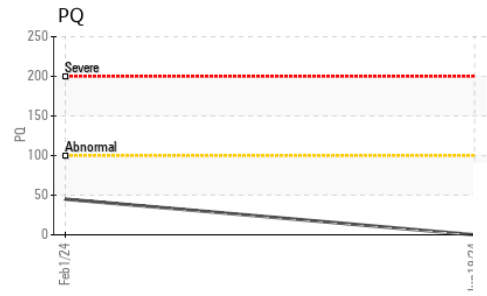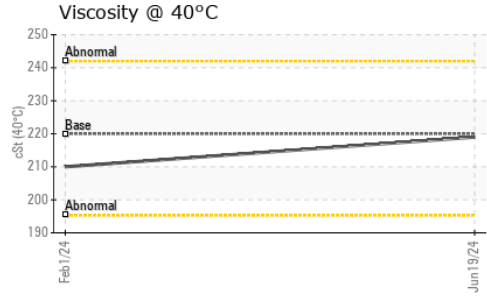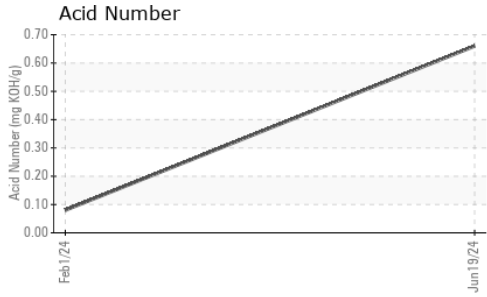






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	220	<b>219</b>	210	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

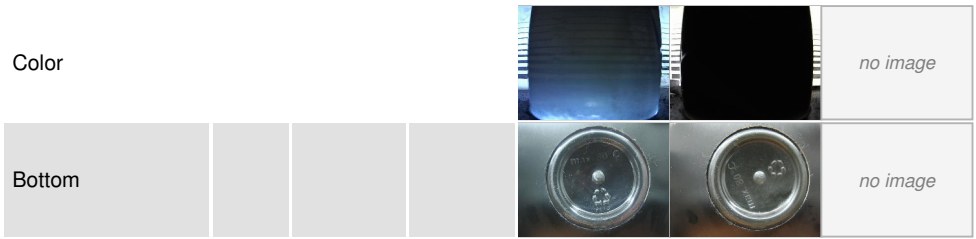

## GRAPHS

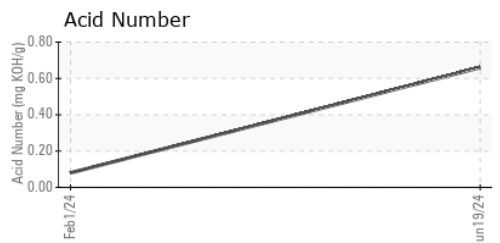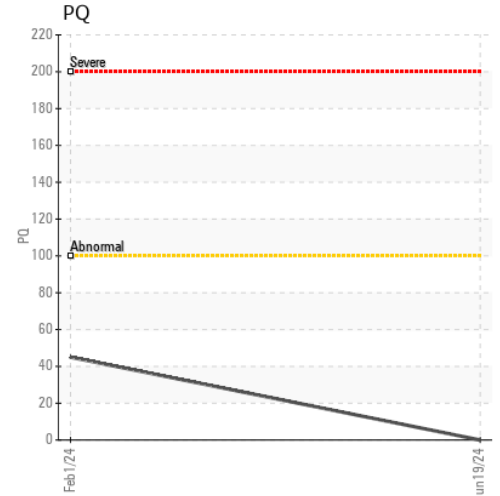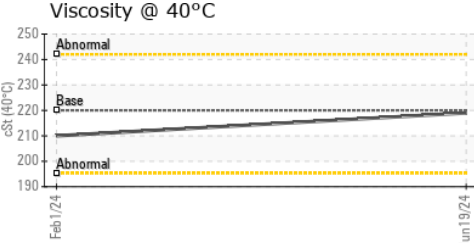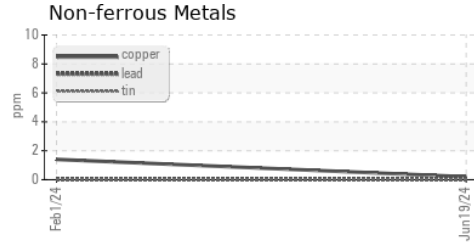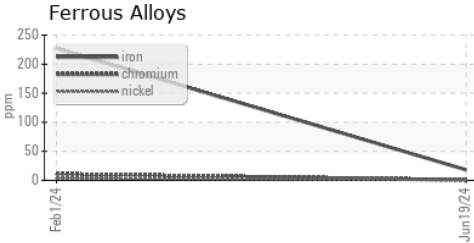

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0886537  
**Lab Number** : 02643836  
**Unique Number** : 5801375  
**Test Package** : IND 2  
**Received** : 24 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Kevin Marson

**CARMEUSE LIME CANADA LTD.**  
 BOX 1690., HWY 17 EAST  
 BLIND RIVER, ON  
 CA P0R 1B0  
 Contact: Rejean Baillargeon  
 rejean.baillargeon@carmeusena.com  
 T: (705)849-2201  
 F: (705)849-2355

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.