




OIL ANALYSIS REPORT

Sample Rating Trend

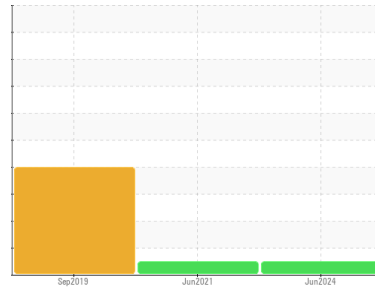

NORMAL



Machine Id

9519

Component

Diesel Engine

Fluid

CHEVRON DELO 400 SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0924247	WC0580877	WC0385112
Sample Date	Client Info			21 Jun 2024	16 Jun 2021	09 Sep 2019
Machine Age	hrs	Client Info		0	8356	3945
Oil Age	hrs	Client Info		0	517	500
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>130	11	19	▲ 191
Chromium	ppm	ASTM D5185(m)	>10	0	<1	2
Nickel	ppm	ASTM D5185(m)	>4	0	<1	1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	2
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	5
Lead	ppm	ASTM D5185(m)	>20	0	0	<1
Copper	ppm	ASTM D5185(m)	>125	<1	<1	11
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	<1	<1
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		52	67	30
Barium	ppm	ASTM D5185(m)		0	<1	<1
Molybdenum	ppm	ASTM D5185(m)		81	5	4
Manganese	ppm	ASTM D5185(m)		0	<1	2
Magnesium	ppm	ASTM D5185(m)		44	680	760
Calcium	ppm	ASTM D5185(m)		1971	1298	1397
Phosphorus	ppm	ASTM D5185(m)	1260	942	675	718
Zinc	ppm	ASTM D5185(m)	1400	1112	778	835
Sulfur	ppm	ASTM D5185(m)		3180	2473	2543
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	8	4	▲ 33
Sodium	ppm	ASTM D5185(m)		3	4	2
Potassium	ppm	ASTM D5185(m)	>20	1	3	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.5	0.7	1.8
Nitration	Abs/cm	ASTM D7624*	>20	9.5	10.3	15.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	21.6	▲ 33.1



OIL ANALYSIS REPORT

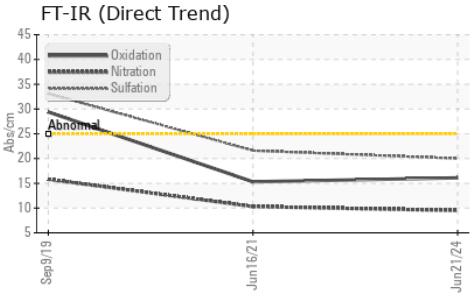

FLUID DEGRADATION

Parameter	Method	Limit/Base	Current	History1	History2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.1	15.3 ▲ 29.4











VISUAL

Parameter	Method	Limit/Base	Current	History1	History2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES

Parameter	Method	Limit/Base	Current	History1	History2
Visc @ 100°C	cSt	ASTM D7279(m)	11.1	11.5	12.8

GRAPHS

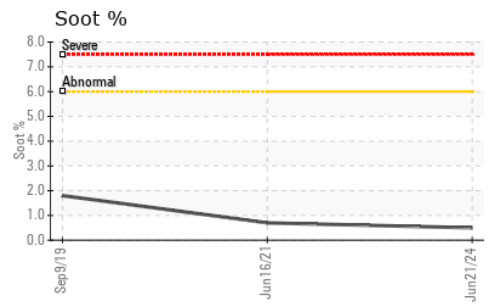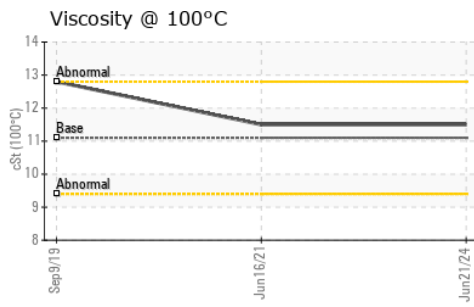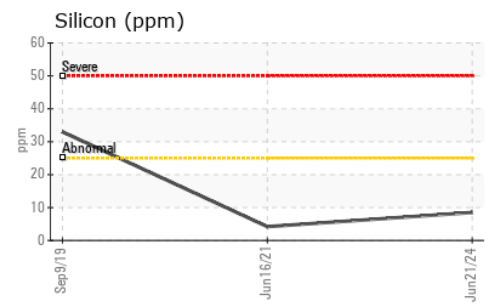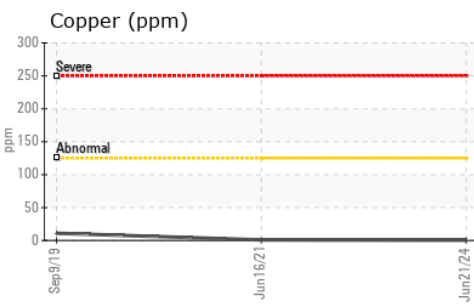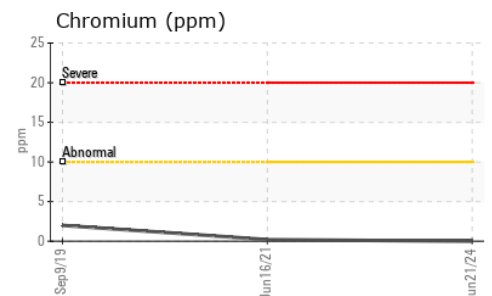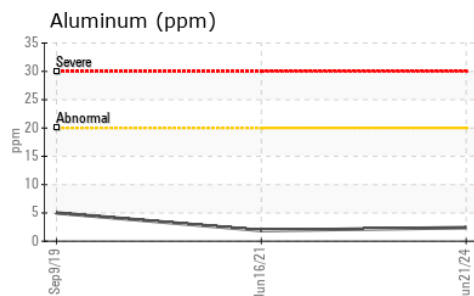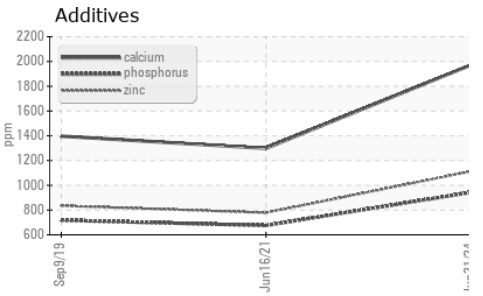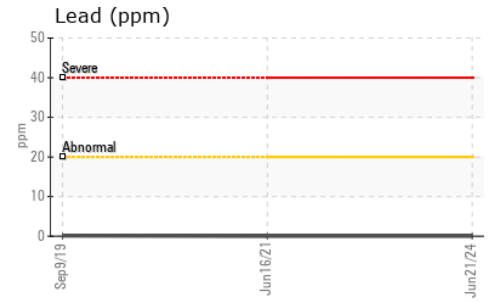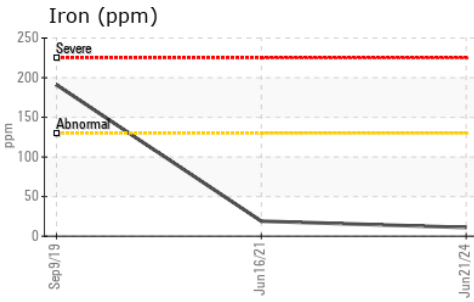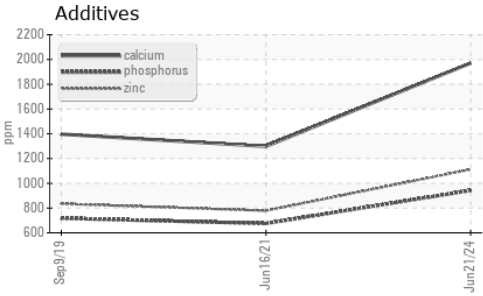

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0924247 **Received** : 25 Jun 2024
Lab Number : 02643883 **Tested** : 25 Jun 2024
Unique Number : 5801422 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : MOB 1

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.