



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Area  
**[44192202]**  
 Machine Id  
**9707**  
 Component  
**Diesel Engine**  
 Fluid  
**SAE 10W30 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 Metal levels are typical for a new component breaking in.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0924035</b>	---	---
Sample Date	Client Info		<b>13 Apr 2024</b>	---	---
Machine Age	kms	Client Info	<b>93887</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	<b>34</b>	---
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>5</b>	---
Lead	ppm	ASTM D5185(m)	>40	<b>9</b>	---
Copper	ppm	ASTM D5185(m)	>330	<b>4</b>	---
Tin	ppm	ASTM D5185(m)	>15	<b>1</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>29</b>	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---
Molybdenum	ppm	ASTM D5185(m)		<b>1</b>	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185(m)		<b>696</b>	---
Calcium	ppm	ASTM D5185(m)		<b>1265</b>	---
Phosphorus	ppm	ASTM D5185(m)		<b>580</b>	---
Zinc	ppm	ASTM D5185(m)		<b>688</b>	---
Sulfur	ppm	ASTM D5185(m)		<b>2316</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	---
Sodium	ppm	ASTM D5185(m)	>228	<b>3</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>6</b>	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.3</b>	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.7</b>	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>27.7</b>	---



# OIL ANALYSIS REPORT






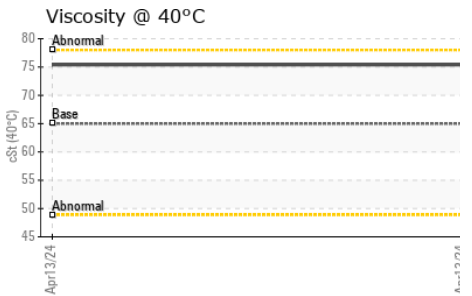
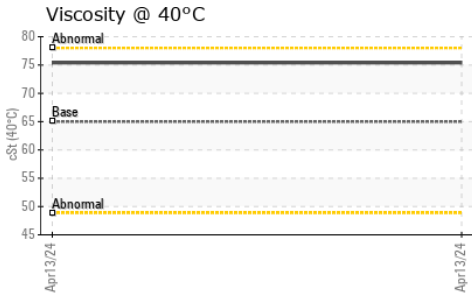
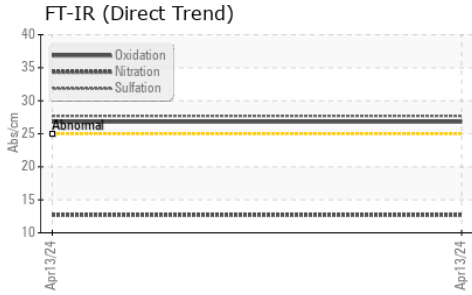


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>26.8</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	65.0	<b>75.4</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.0	<b>10.9</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	161	<b>132</b>	---	---

### GRAPHS

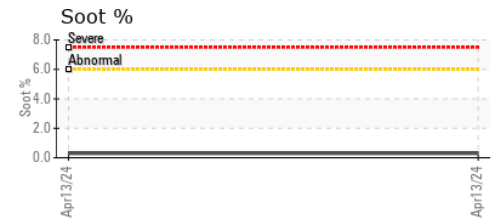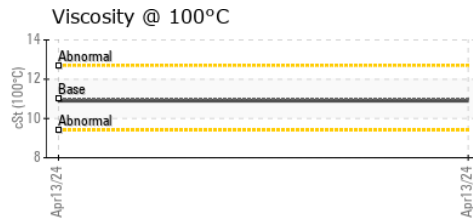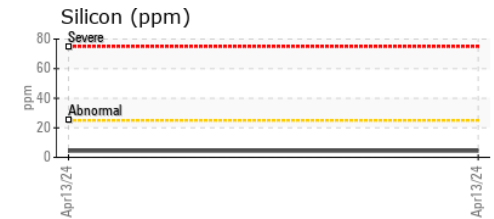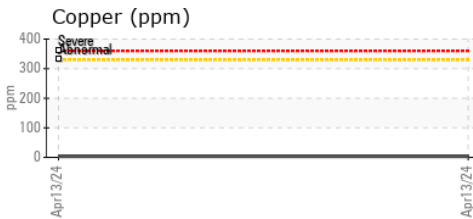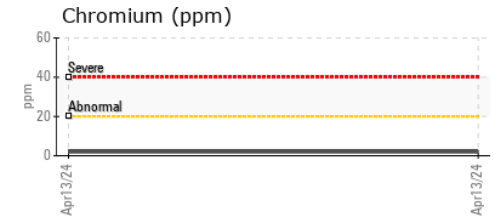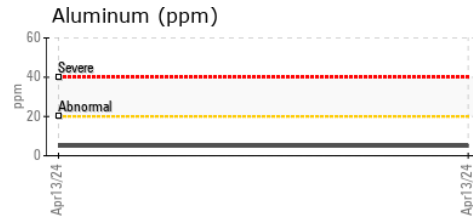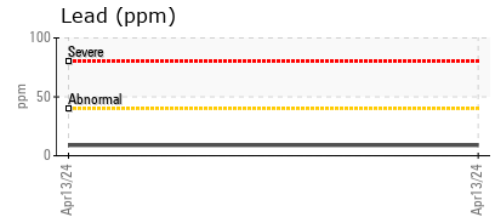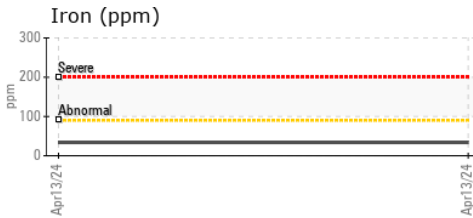

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0924035      **Received** : 25 Jun 2024  
**Lab Number** : **02643893**      **Tested** : 26 Jun 2024  
**Unique Number** : 5801432      **Diagnosed** : 26 Jun 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI, Visual )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F: