




OIL ANALYSIS REPORT

Sample Rating Trend

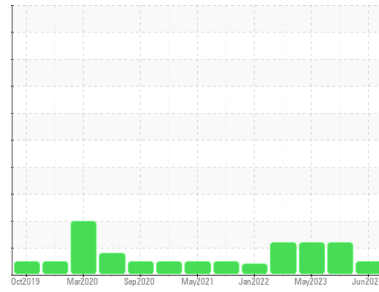

NORMAL



Machine Id

9556

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0924178	WC0853449	WC0796339
Sample Date	Client Info		06 Jun 2024	05 Mar 2024	04 May 2023
Machine Age	kms	Client Info	0	134437	121557
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	▲ 1.1	▲ 2.4
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>130	20	12	60
Chromium	ppm	ASTM D5185(m)	>10	<1	0	1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	9	5	28
Lead	ppm	ASTM D5185(m)	>20	0	0	0
Copper	ppm	ASTM D5185(m)	>125	<1	<1	2
Tin	ppm	ASTM D5185(m)	>4	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	75	83	42
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	2	1	4
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	450	700	703	713
Calcium	ppm	ASTM D5185(m)	3000	1290	1254	1426
Phosphorus	ppm	ASTM D5185(m)	1150	654	664	703
Zinc	ppm	ASTM D5185(m)	1350	767	744	767
Sulfur	ppm	ASTM D5185(m)	4250	2406	2430	2561
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	3	6
Sodium	ppm	ASTM D5185(m)		3	2	4
Potassium	ppm	ASTM D5185(m)	>20	10	7	40

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	0.1	0	0.4
Nitration	Abs/cm	ASTM D7624*	>20	8.5	7.2	12.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.8	18.3	25.5



OIL ANALYSIS REPORT








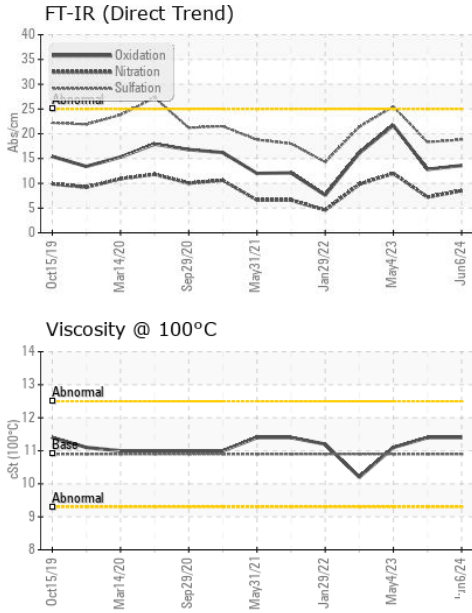


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	13.6	12.8	21.7

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.4	▲ 11.4	▲ 11.1

GRAPHS

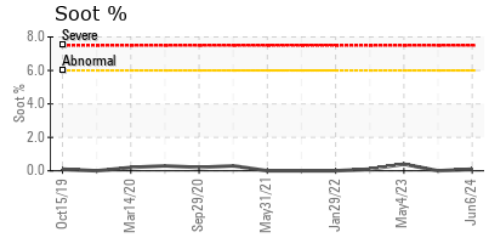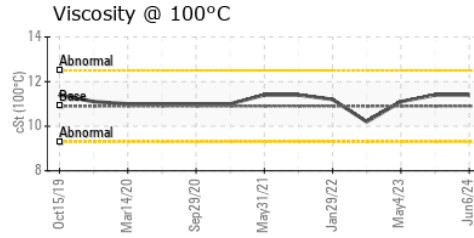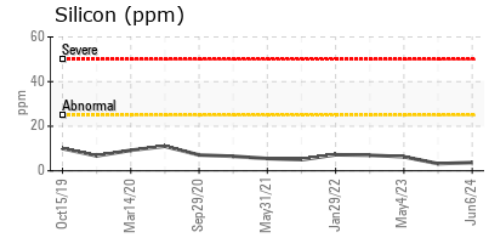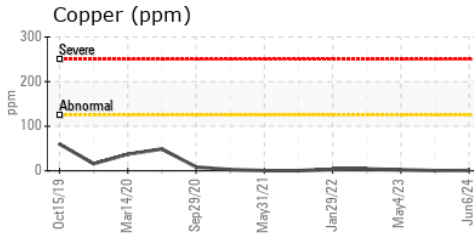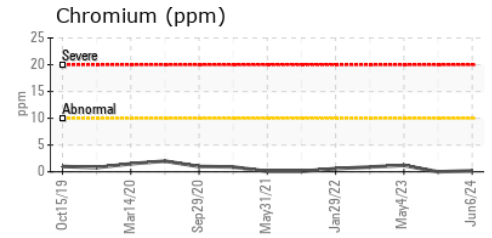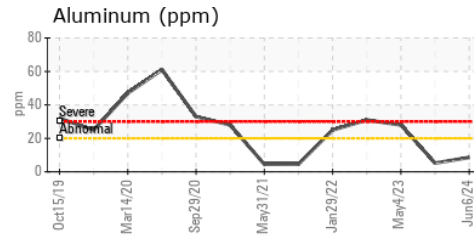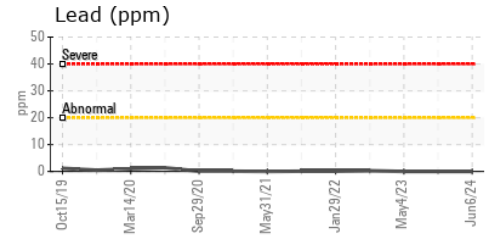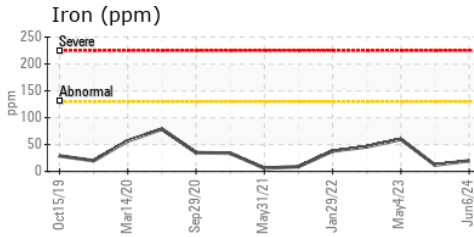

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0924178 **Received** : 25 Jun 2024
Lab Number : 02643929 **Tested** : 25 Jun 2024
Unique Number : 5801468 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.