




# OIL ANALYSIS REPORT

## Sample Rating Trend

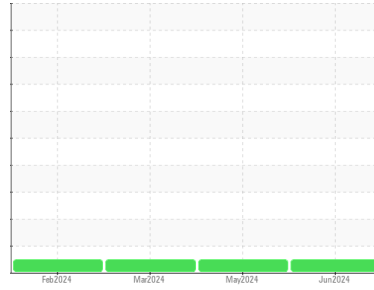

**NORMAL**



Machine Id

**2273**

Component

**Natural Gas Engine**

Fluid

**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0937111</b>	WC0937351	WC0917567
Sample Date	Client Info			<b>20 Jun 2024</b>	01 May 2024	17 Mar 2024
Machine Age	kms	Client Info		<b>32773</b>	25441	16417
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.1		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>---</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>50	<b>8</b>	10	14
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	2	2
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>35	<b>&lt;1</b>	1	3
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>11</b>	15	12
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>53</b>	55	57
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185(m)		<b>773</b>	819	803
Calcium	ppm	ASTM D5185(m)		<b>1177</b>	1257	1253
Phosphorus	ppm	ASTM D5185(m)		<b>597</b>	634	681
Zinc	ppm	ASTM D5185(m)		<b>830</b>	863	856
Sulfur	ppm	ASTM D5185(m)		<b>1853</b>	1912	2078
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>+100	<b>5</b>	4	11
Sodium	ppm	ASTM D5185(m)		<b>4</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.1</b>	12.6	12.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.9</b>	22.1	22.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.6</b>	19.0	19.4











# OIL ANALYSIS REPORT

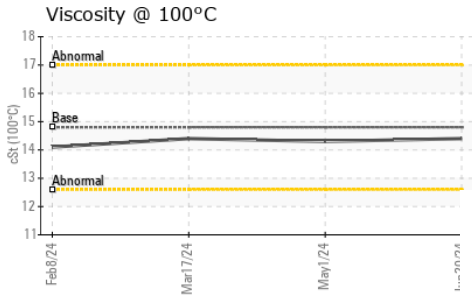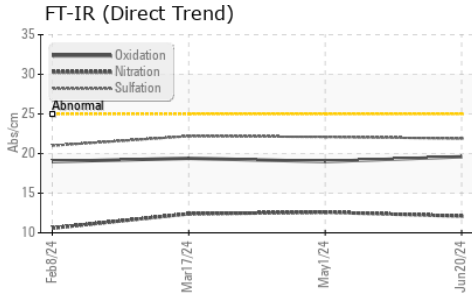

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>14.4</b>	14.3	14.4

### GRAPHS

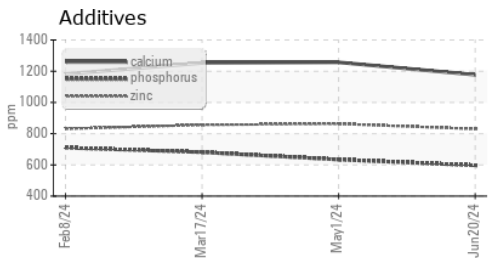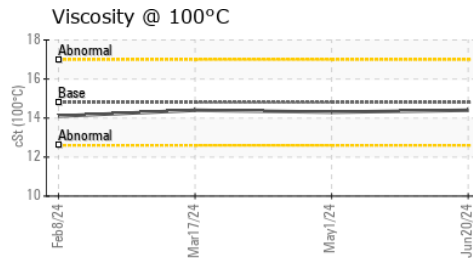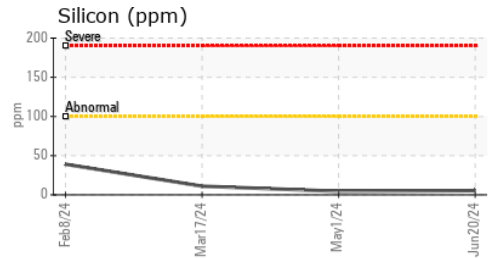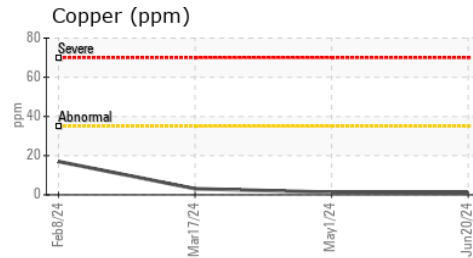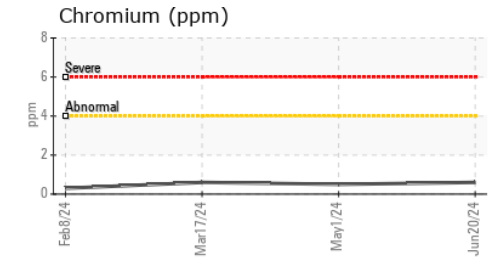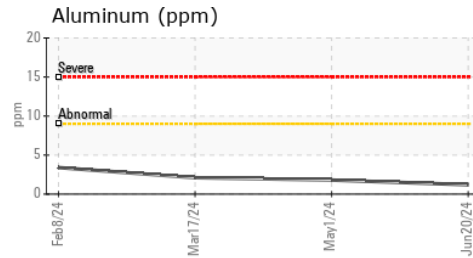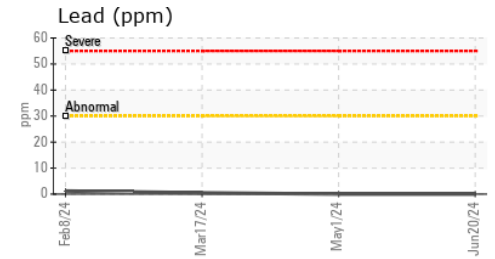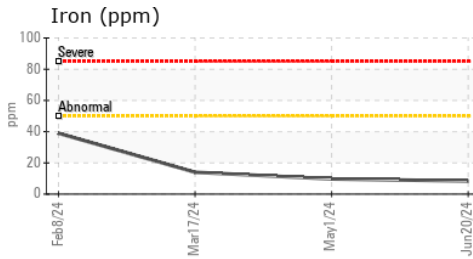

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0937111      **Received** : 25 Jun 2024  
**Lab Number** : **02644015**      **Tested** : 25 Jun 2024  
**Unique Number** : 5801554      **Diagnosed** : 25 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.