




OIL ANALYSIS REPORT

Sample Rating Trend

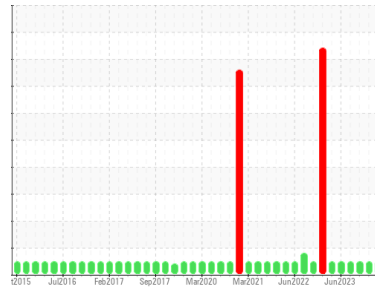

NORMAL



Machine Id
NEW FLYER 1424
 Component
Natural Gas Engine
 Fluid
VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0937170	WC0917672	WC0878158
Sample Date	Client Info		11 Jun 2024	26 Mar 2024	22 Dec 2023
Machine Age	kms	Client Info	649232	630573	620415
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	22	10	10
Chromium	ppm	ASTM D5185(m)	>4	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>9	2	1	2
Lead	ppm	ASTM D5185(m)	>30	1	0	<1
Copper	ppm	ASTM D5185(m)	>35	2	3	2
Tin	ppm	ASTM D5185(m)	>4	1	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		6	44	7
Barium	ppm	ASTM D5185(m)		<1	7	0
Molybdenum	ppm	ASTM D5185(m)		56	47	56
Manganese	ppm	ASTM D5185(m)		2	4	0
Magnesium	ppm	ASTM D5185(m)		825	781	844
Calcium	ppm	ASTM D5185(m)		1264	1166	1325
Phosphorus	ppm	ASTM D5185(m)		668	691	707
Zinc	ppm	ASTM D5185(m)		881	790	919
Sulfur	ppm	ASTM D5185(m)		1903	1944	2079
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	18	23	4
Sodium	ppm	ASTM D5185(m)		10	27	4
Potassium	ppm	ASTM D5185(m)	>20	3	3	2

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	12.9	6.7	13.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.4	19.7	25.6


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	23.4	16.4	22.9




OIL ANALYSIS REPORT

FT-IR (Direct Trend)

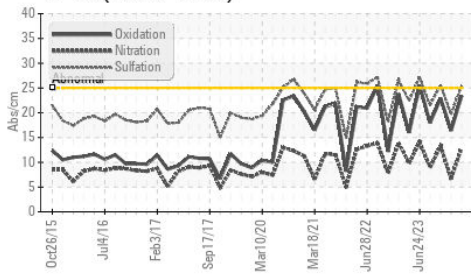

Viscosity @ 100°C

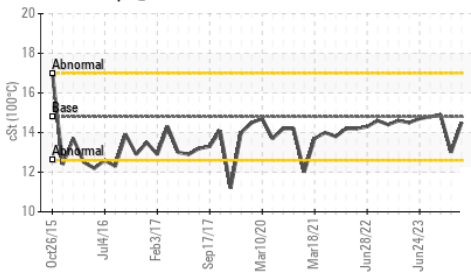


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	---	NONE
Yellow Metal	scalar	Visual*	NONE	---	NONE
Precipitate	scalar	Visual*	NONE	---	NONE
Silt	scalar	Visual*	NONE	---	NONE
Debris	scalar	Visual*	NONE	---	NONE
Sand/Dirt	scalar	Visual*	NONE	---	NONE
Appearance	scalar	Visual*	NORML	---	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.5	13.0

GRAPHS


Iron (ppm)

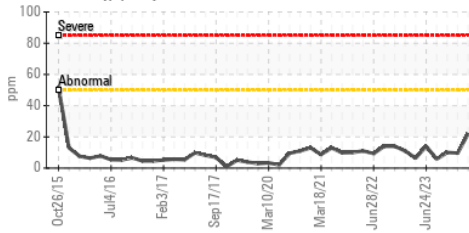


Lead (ppm)

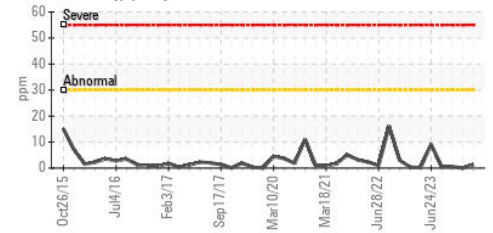


Aluminum (ppm)

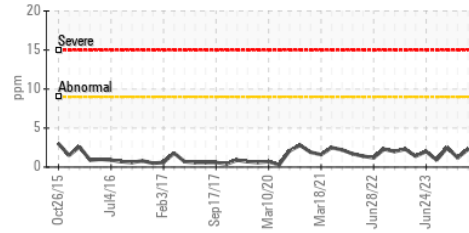


Chromium (ppm)

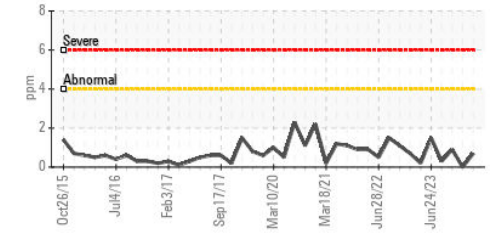


Copper (ppm)

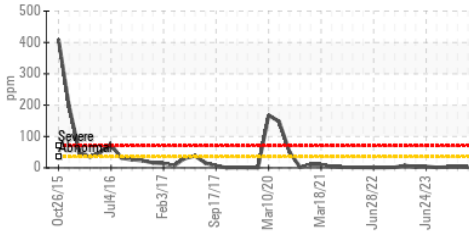


Silicon (ppm)

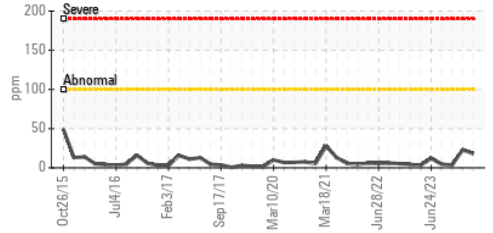

Viscosity @ 100°C

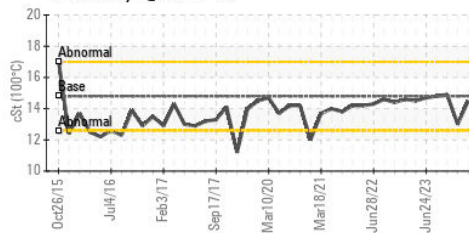

Additives

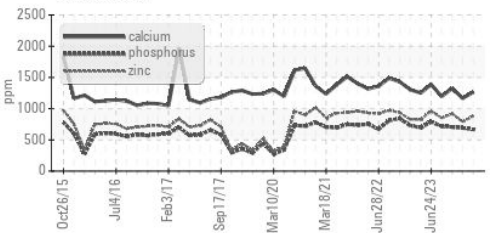

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0937170 **Received** : 26 Jun 2024
Lab Number : 02644126 **Tested** : 26 Jun 2024
Unique Number : 5801665 **Diagnosed** : 27 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Visual)

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Jeff Parr
 jeff.parr@hamilton.ca
 T: (905)546-2424
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.