

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Area Chem-Ecol Machine Io A2406155 Component Unknown Component Fluid CHEM-ECOL GREENLUBE 46 (--- GAL)

## DIAGNOSIS


## Recommendation


We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Batch #		Client Info		3122-A		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		06/24/2024		
Sample Number		Client Info		E30002468		
Sample Date		Client Info		24 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		24		
Chromium	ppm	ASTM D5185(m)		<1		
Nickel	ppm	ASTM D5185(m)		1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)		4		
Lead	ppm	ASTM D5185(m)		10		
Copper	ppm	ASTM D5185(m)		73		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		65		
Calcium	ppm	ASTM D5185(m)		74		
Phosphorus	ppm	ASTM D5185(m)		621		
Zinc	ppm	ASTM D5185(m)		576		
Sulfur	ppm	ASTM D5185(m)		2208		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		7		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.001		
ppm Water	ppm	ASTM D6304*		14		




## **OIL ANALYSIS REPORT**

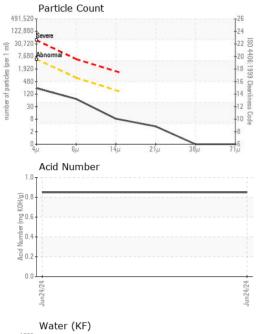

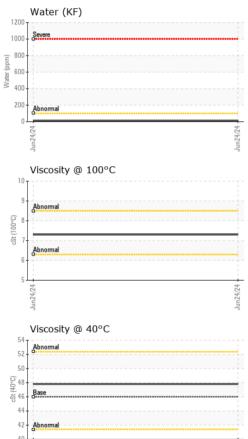

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	203		
Particles >6µm		ASTM D7647	>640	62		
Particles >14µm		ASTM D7647	>160	7		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	15/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.85		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	47.8		
Visc @ 100°C	cSt	ASTM D7279(m)		7.3		
Viscosity Index (VI)	Scale	ASTM D2270*		113		
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

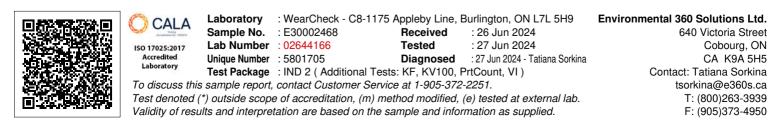

Report Id: CHECOB [WCAMIS] 02644166 (Generated: 06/27/2024 09:55:10) Rev: 1

Jun24/24

Contact/Location: Tatiana Sorkina - CHECOB Page 2 of 2