




OIL ANALYSIS REPORT

Sample Rating Trend

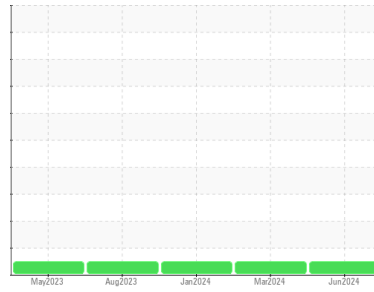

NORMAL



Machine Id
John Deere 210G JM210G
 Component
Diesel Engine
 Fluid
BOSS LUBRICANTS BLUE RAM DIESEL 15W40 (21 LTR)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0901556	WC0818956	WC0818954
Sample Date	Client Info			10 Jun 2024	12 Mar 2024	10 Jan 2024
Machine Age	hrs	Client Info		6056	5837	5619
Oil Age	hrs	Client Info		219	139	225
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.1		<1.0	<1.0	<1.0
Water	WC Method	>0.21		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	24	19	33
Chromium	ppm	ASTM D5185(m)	>11	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>31	4	4	7
Lead	ppm	ASTM D5185(m)	>26	0	<1	<1
Copper	ppm	ASTM D5185(m)	>26	<1	<1	1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		7	3	77
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		5	2	93
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)		32	17	308
Calcium	ppm	ASTM D5185(m)		2246	2272	2027
Phosphorus	ppm	ASTM D5185(m)		789	842	862
Zinc	ppm	ASTM D5185(m)		985	948	1005
Sulfur	ppm	ASTM D5185(m)		2701	2988	2890
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	3	6	5
Sodium	ppm	ASTM D5185(m)	>31	2	2	4
Potassium	ppm	ASTM D5185(m)	>20	2	2	12

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.5	0.3	0.5
Nitration	Abs/cm	ASTM D7624*	>20	7.4	6.8	7.9
Sulfation	Abs./1mm	ASTM D7415*	>30	17.6	17.1	19.6



OIL ANALYSIS REPORT







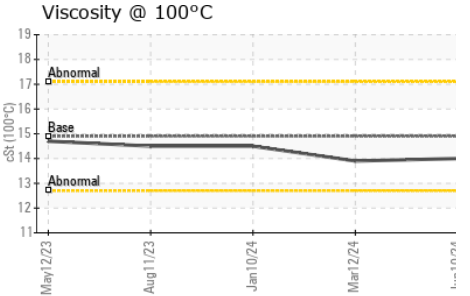
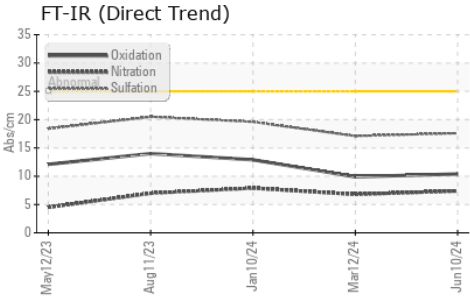


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	10.4	9.9	12.9

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.21	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.9	14.0	13.9	14.5

GRAPHS

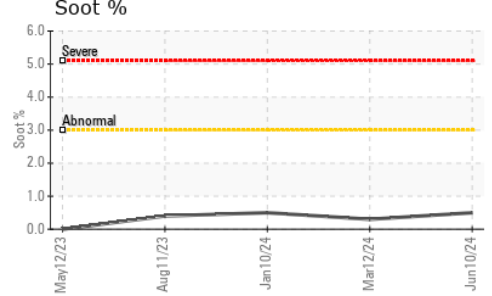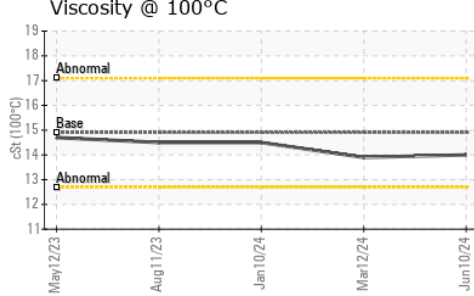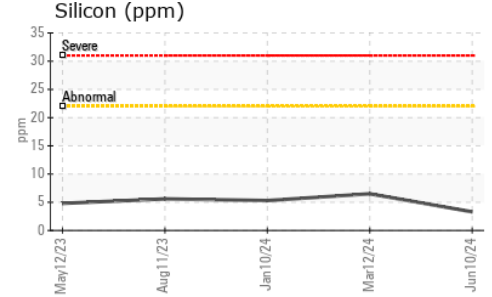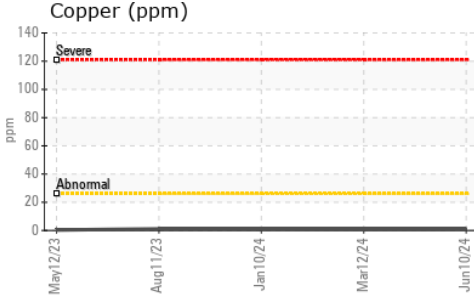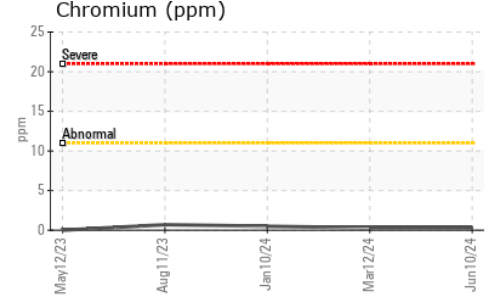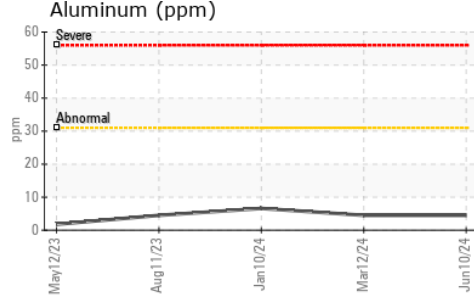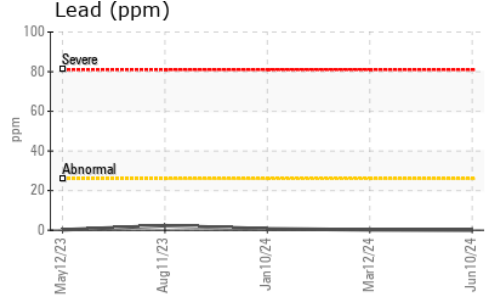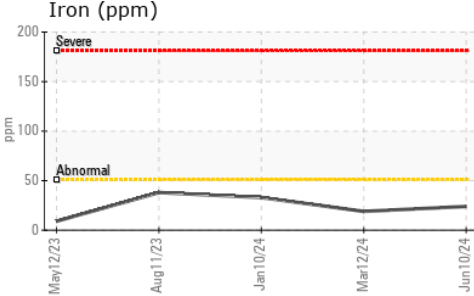

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0901556 **Received** : 27 Jun 2024
Lab Number : 02644294 **Tested** : 27 Jun 2024
Unique Number : 5801833 **Diagnosed** : 27 Jun 2024 - Kevin Marson
Test Package : MOB 1

JD MOBILE REPAIR SERVICE
 183841 GREY ROAD #9
 HOLSTEIN, ON
 CA N0G 2A0
 Contact: John Dowling
 dozerdoctor@hotmail.com
 T: (519)604-8247
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.