




OIL ANALYSIS REPORT

Sample Rating Trend

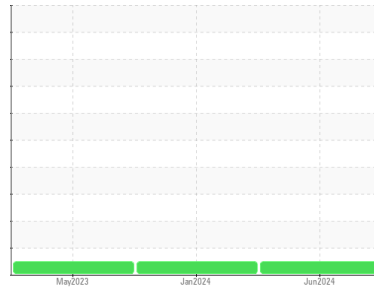

NORMAL



Machine Id
John Deere 210G JM210G
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0818957	WC0818955	WC0818949
Sample Date	Client Info		10 Jun 2024	10 Jan 2024	12 May 2023
Machine Age	hrs	Client Info	6056	5619	5228
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	16	16	11
Chromium	ppm	ASTM D5185(m) >10	1	<1	<1
Nickel	ppm	ASTM D5185(m) >10	0	<1	0
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m)	0	0	0
Aluminum	ppm	ASTM D5185(m) >10	4	4	3
Lead	ppm	ASTM D5185(m) >10	0	<1	<1
Copper	ppm	ASTM D5185(m) >75	4	3	2
Tin	ppm	ASTM D5185(m) >10	0	0	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<1	<1	<1
Barium	ppm	ASTM D5185(m) 5	0	0	0
Molybdenum	ppm	ASTM D5185(m) 5	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	<1
Magnesium	ppm	ASTM D5185(m) 25	<1	<1	<1
Calcium	ppm	ASTM D5185(m) 200	2	5	2
Phosphorus	ppm	ASTM D5185(m) 300	482	514	554
Zinc	ppm	ASTM D5185(m) 370	93	65	41
Sulfur	ppm	ASTM D5185(m) 2500	373	201	182
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<1	<1	1
Sodium	ppm	ASTM D5185(m)	<1	0	<1
Potassium	ppm	ASTM D5185(m) >20	<1	3	0




OIL ANALYSIS REPORT

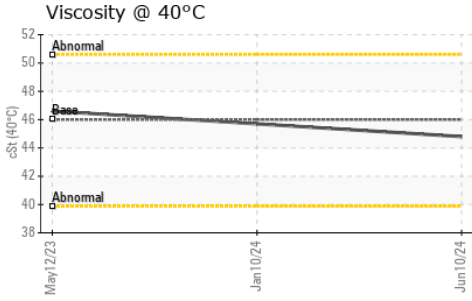









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	46	44.8	45.7	46.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

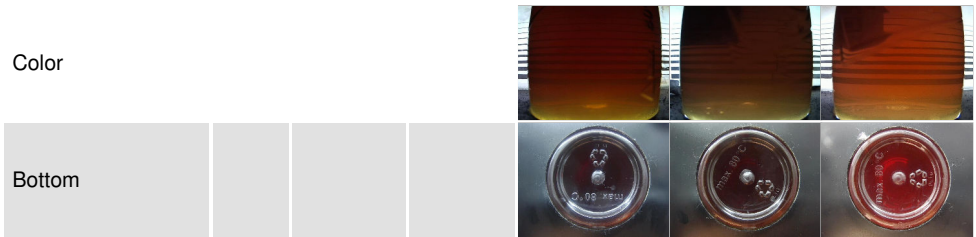

GRAPHS

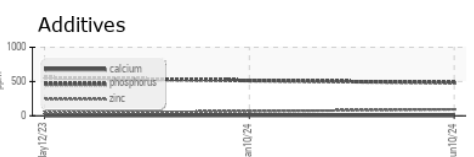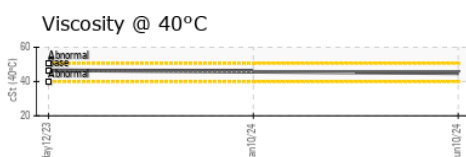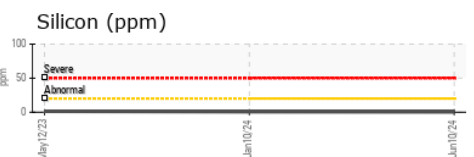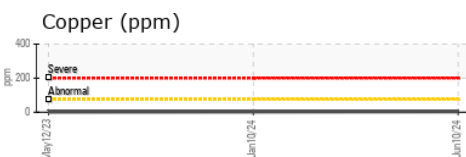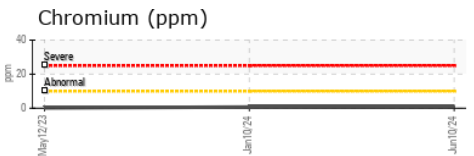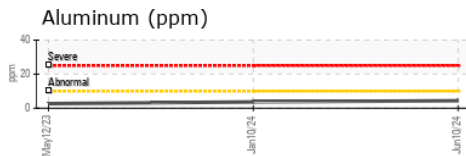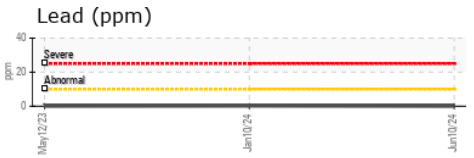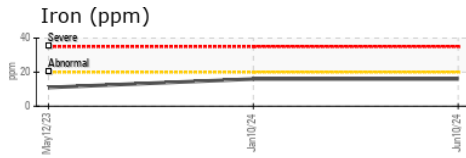

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0818957 **Received** : 27 Jun 2024
Lab Number : **02644364** **Tested** : 27 Jun 2024
Unique Number : 5801903 **Diagnosed** : 27 Jun 2024 - Kevin Marson
Test Package : MOB 1

JD MOBILE REPAIR SERVICE
 183841 GREY ROAD #9
 HOLSTEIN, ON
 CA N0G 2A0
 Contact: John Dowling
 dozerdoctor@hotmail.com
 T: (519)604-8247
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.