

FUEL REPORT



Lower Jet Fuel

JET FUEL Type A (--- GAL)

Sample Rating Trend



DIAGNOSIS

Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

Contamination

The water content is negligible. The fuel phase was tested for microbes, as there was no separate water phase present in the sample. The MicrobMonitor2 test kit was used to test for microbiological contamination in the sample. There is no indication of any contamination in the jet fuel.


Fluid Condition

All laboratory tests indicate that this sample appears to be Jet Fuel Type A.

SAMPLE INFORM	MATION	mothod	limit/bass	ourront.	hiotonyi	history?
	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0653016		
Sample Date	In	Client Info		26 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0 N/A		
Oil Changed		Client Info		NORMAL		
Sample Status				NORWAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*		0.806		
Fuel Color	text	Visual Screen*		Yllow		
Visc @ 40°C	cSt	ASTM D7279(m)	<8.0	1.5		
Pensky-Martens Flash Point	°C	ASTM D7215*	38	43.8		
Pour Point	°C	ASTM D97*	-45	-60		
SULFUR CONTE	NΤ	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	<3000	394		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*		152		
5% Distillation Point	°C	ASTM D2887*		166		
10% Distill Point	°C	ASTM D2887*	205	172		
15% Distillation Point	°C	ASTM D2887*		177		
20% Distill Point	°C	ASTM D2887*		182		
30% Distill Point	°C	ASTM D2887*		190		
40% Distill Point	°C	ASTM D2887*		200		
50% Distill Point	°C	ASTM D2887*		209		
60% Distill Point	°C	ASTM D2887*		219		
70% Distill Point	°C	ASTM D2887*		228		
80% Distill Point	°C	ASTM D2887*		242		
85% Distillation Point	°C	ASTM D2887*		253		
90% Distill Point	°C	ASTM D2887*		264		
95% Distillation Point	°C	ASTM D2887*		283		
Final Boiling Point	°C	ASTM D2887*	300	334		
IGNITION QUALIT	ΓΥ	method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	44	44		
Cetane Index		ASTM D4737*	<40.0	48		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	0		
Sodium	ppm	ASTM D5185(m)	<0.1	0		
Potassium	ppm	ASTM D5185(m)	<0.1	0		
Water	%	ASTM D6304*	< 0.05	0.003		
ppm Water	ppm	ASTM D6304*	<500	36		
MICROBIAL		method	limit/base	current	history1	history2
Microbes	CFU/L	ASTM D6469*	>=100000	0		



FUEL REPORT

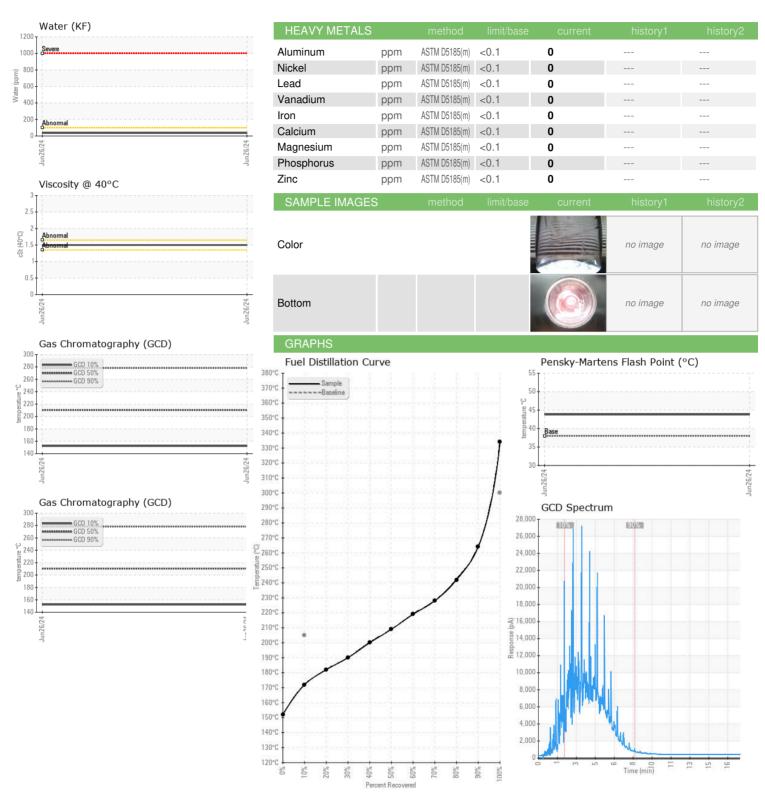



CALA ISO 17025:2017 Accredited Laboratory

Report Id: PORTORTOR [WCAMIS] 02644442 (Generated: 07/04/2024 05:30:48) Rev: 1

Laboratory Sample No.

Lab Number : 02644442 Unique Number : 5801981

: WC0653016

To discuss this sample report, contact Customer Service at 1-800-268-2131.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Tested Diagnosed Test Package : FUEL (Additional Tests: CC Flash)

: 27 Jun 2024 : 04 Jul 2024

: 04 Jul 2024 - Kevin Marson

PORTER AIRLINES INC BILLY BISHOP TORONTO CITY AIRPORT, HANGAR 5 TORONTO, ON

CA M5V 1A1 Contact: Jason Thibault jason.thibault@flyporter.com

T: (647)454-7933 F: (416)203-9198

Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Jason Thibault - PORTORTOR