

OIL ANALYSIS REPORT

Stadacona - S11900 A2406163

Unknown Component

MOBIL SHC 634 (--- GAL)

Sample Rating Trend

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

Contamination

Silicon ppm levels are notably high.

Fluid Condition

Zinc ppm levels are notably high. Sulfur ppm levels are notably low.

				Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		2024 06 0450		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		06/26/2024		
Sample Number		Client Info		E30002509		
Sample Date		Client Info		25 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		2		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		6		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES	''	method	limit/base	current	history1	history2
	10 10 100			<1		
Boron Barium	ppm	ASTM D5185(m) ASTM D5185(m)	3.6			
	ppm	ASTM D5185(m)		<1 0		
Molybdenum	ppm	ASTM D5185(m)	0.0	0		
Manganese Magnesium	ppm	ASTM D5185(m)	0.0	2		
-	ppm		0.0			
Calcium	ppm	ASTM D5185(m) ASTM D5185(m)		2 347		
Phosphorus Zinc	ppm	ASTM D5185(m) ASTM D5185(m)		347		
zinc Sulfur	ppm	, ,				
Lithium	ppm	ASTM D5185(m) ASTM D5185(m)	386	169		
		(/	lippit/le a c			
CONTAMINANTS		method	limit/base		history1	history2
Silicon	ppm	ASTM D5185(m)		14		
Sodium	ppm	ASTM D5185(m)		1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Motor	0/	ACTM DC204*		0.00		

ASTM D6304*

ASTM D6304*

ppm

Water


ppm Water

0.00

0



OIL ANALYSIS REPORT

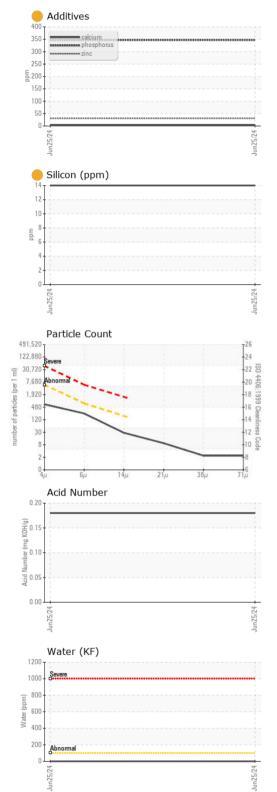

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	579		
Particles >6µm		ASTM D7647	>640	212		
Particles >14µm		ASTM D7647	>160	25		
Particles >21µm		ASTM D7647	>40	8		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647	>3	2		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	16/15/12		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.18		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	436.4	422		
Visc @ 100°C	cSt	ASTM D7279(m)	44.9	49.5		
Viscosity Index (VI)	Scale	ASTM D2270*	159	179		
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color					no image	no image
Bottom				mar. St.	no image	no image
			_			



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: E30002509 Lab Number : 02644588 Unique Number : 5802127

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received

: 28 Jun 2024 **Tested** : 02 Jul 2024 : 02 Jul 2024 - Aylwin Lee Diagnosed

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950