




OIL ANALYSIS REPORT

Sample Rating Trend

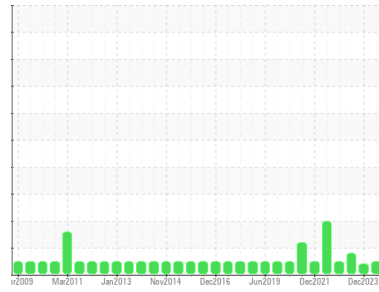

NORMAL



Area
OZR/BD09
 Machine Id
101904 Central
 Component
Hydraulic System
 Fluid
ESSO NUTO H ISO 46 (200 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The oil viscosity is higher than typical. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0940097	WC0855088	WC0790640
Sample Date	Client Info	25 Jun 2024	19 Dec 2023	20 Jun 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	ABNORMAL	ATTENTION

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>40	<1	<1	<1
Chromium	ppm	ASTM D5185(m)	>4	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>4	<1	<1	0
Lead	ppm	ASTM D5185(m)	>10	0	0	0
Copper	ppm	ASTM D5185(m)	>60	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	0	0	0	0
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	5	0	<1	<1
Calcium	ppm	ASTM D5185(m)	50	52	51	52
Phosphorus	ppm	ASTM D5185(m)	330	324	336	372
Zinc	ppm	ASTM D5185(m)	410	429	415	441
Sulfur	ppm	ASTM D5185(m)	2700	5707	6081	5843
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>20	0	0	<1
Sodium	ppm	ASTM D5185(m)		0	0	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1


FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>5000	1066	2076	4236
Particles >6µm	ASTM D7647	>1300	364	778	1312
Particles >14µm	ASTM D7647	>160	46	80	147
Particles >21µm	ASTM D7647	>40	11	24	53
Particles >38µm	ASTM D7647	>10	1	2	3
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/16/13	18/17/13	19/18/14




OIL ANALYSIS REPORT


Particle Trend

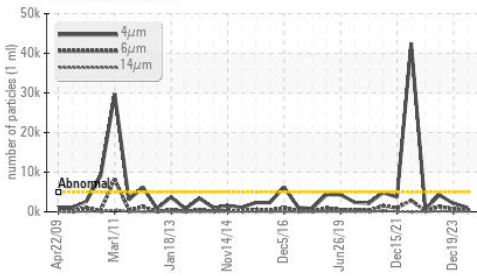


Acid Number

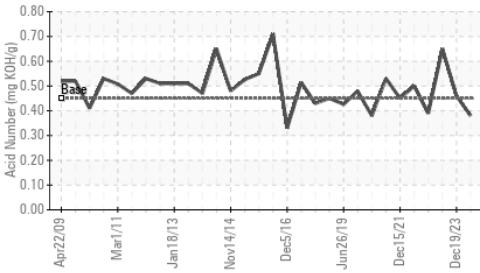

Viscosity @ 40°C

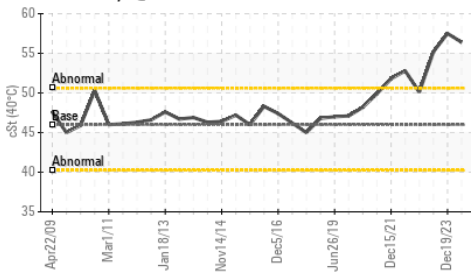

Particle Trend

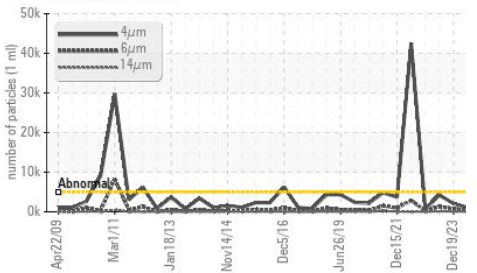

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g ASTM D974*	0.45	0.38	0.46	0.65


VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar Visual*	NONE	NONE	NONE	NONE
Silt	scalar Visual*	NONE	NONE	NONE	NONE
Debris	scalar Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar Visual*	NONE	NONE	NONE	NONE
Appearance	scalar Visual*	NORML	NORML	NORML	NORML
Odor	scalar Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D7279(m)	46	56.4	▲ 57.5	55.2

SAMPLE IMAGES

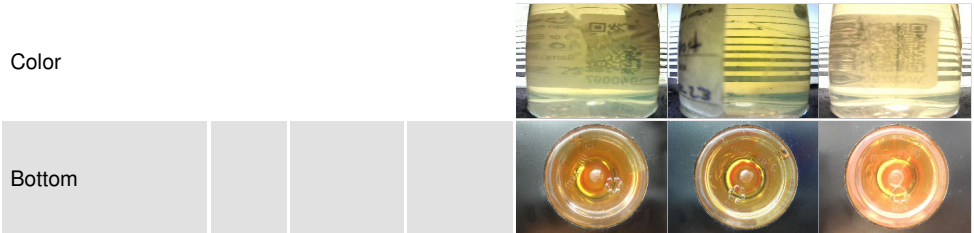


GRAPHS


Ferrous Alloys

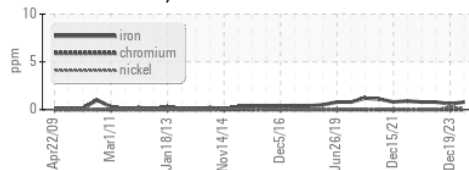


Non-ferrous Metals

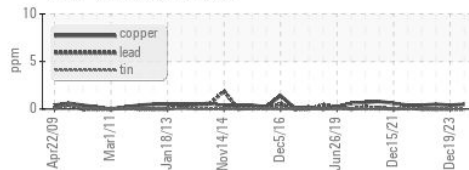


Viscosity @ 40°C

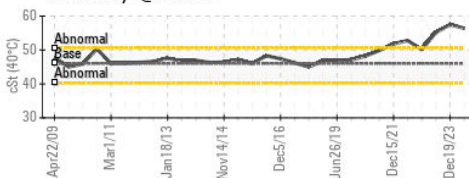

Particle Count

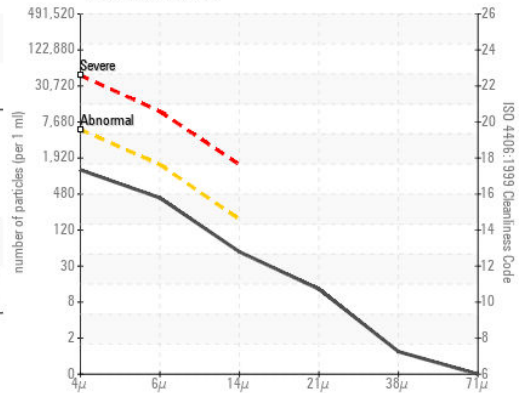

Acid Number

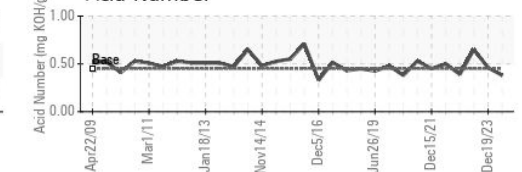

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0940097
Lab Number : 02644597
Unique Number : 5802136
Test Package : IND 2

Received : 28 Jun 2024
Tested : 02 Jul 2024
Diagnosed : 02 Jul 2024 - Kevin Marson

MICHELIN TIRE
 866 RANDOLPH RD
 WATERVILLE, NS
 CA B0P 1V0

Contact: Alan Davies
 alan.davies@michelin.com

T: (902)534-3590

F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.