




OIL ANALYSIS REPORT

Sample Rating Trend

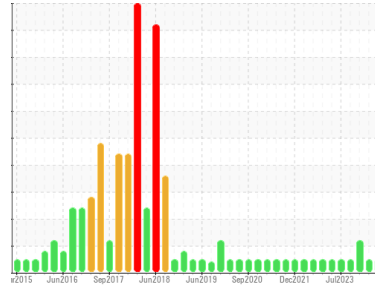

NORMAL



Area
6 Calender Line
 Machine Id
39-0413 Calender
 Component
Bearing
 Fluid
MOBIL GLYGOYLE 30 (116 GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0926949	WC0892249	WC0837284
Sample Date	Client Info	06 Jun 2024	20 Mar 2024	04 Jan 2024
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	ATTENTION

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	<1	<1	1
Chromium	ppm ASTM D5185(m) >20	0	0	0
Nickel	ppm ASTM D5185(m) >20	<1	0	<1
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	0	0	0
Aluminum	ppm ASTM D5185(m) >20	<1	0	<1
Lead	ppm ASTM D5185(m) >20	0	0	0
Copper	ppm ASTM D5185(m) >20	<1	<1	<1
Tin	ppm ASTM D5185(m) >20	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<1	<1	<1
Barium	ppm ASTM D5185(m)	0	<1	0
Molybdenum	ppm ASTM D5185(m)	0	0	0
Manganese	ppm ASTM D5185(m)	0	0	0
Magnesium	ppm ASTM D5185(m)	<1	0	0
Calcium	ppm ASTM D5185(m)	<1	<1	1
Phosphorus	ppm ASTM D5185(m)	1071	1115	1195
Zinc	ppm ASTM D5185(m)	2	2	2
Sulfur	ppm ASTM D5185(m)	16	18	53
Lithium	ppm ASTM D5185(m)	<1	<1	<1





CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	4	3	6
Sodium	ppm ASTM D5185(m)	2	2	1
Potassium	ppm ASTM D5185(m) >20	1	1	5

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	4508	3036	14975
Particles >6µm	ASTM D7647 >2500	1331	823	3656
Particles >14µm	ASTM D7647 >160	76	79	154
Particles >21µm	ASTM D7647 >40	18	29	35
Particles >38µm	ASTM D7647 >10	2	4	4
Particles >71µm	ASTM D7647 >3	1	0	1

Oil Cleanliness	ISO 4406 (c) >20/18/14	19/18/13	19/17/13	21/19/14
-----------------	------------------------	-----------------	----------	----------

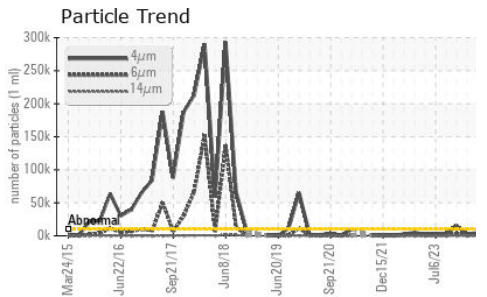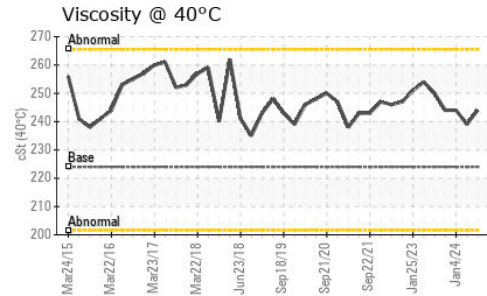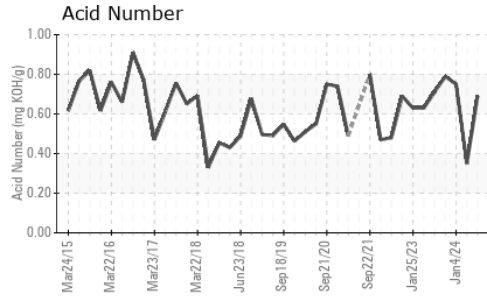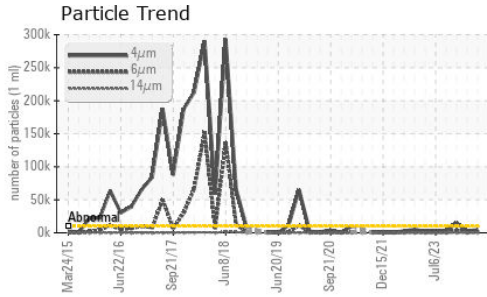


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.69	0.35	0.75






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	224	244	239	244

SAMPLE IMAGES

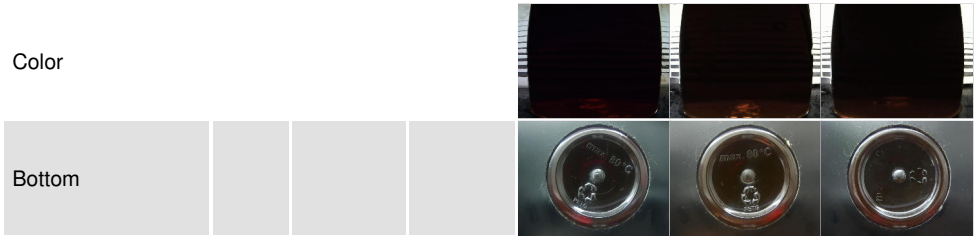

GRAPHS

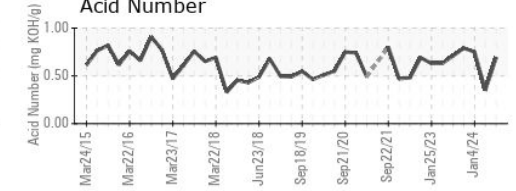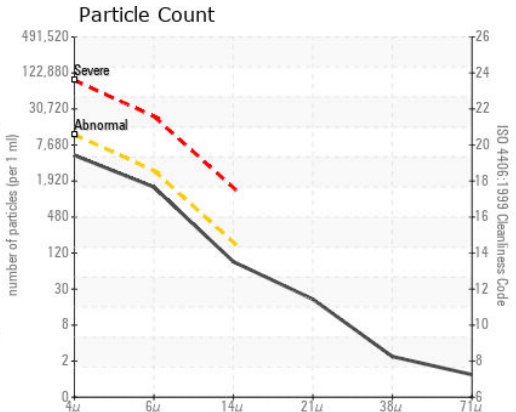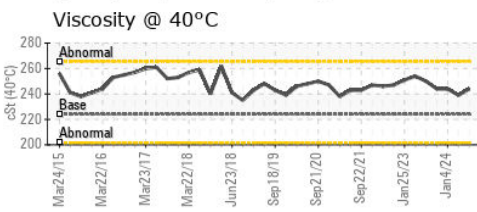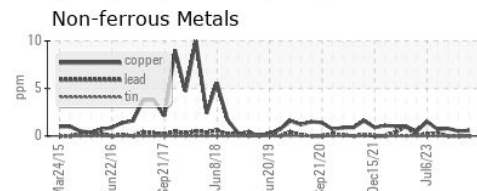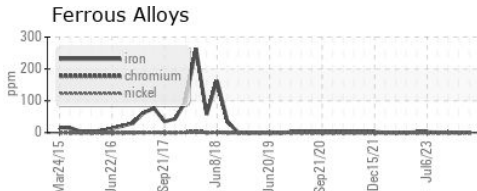

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0926949
Lab Number : 02644904
Unique Number : 5802443
Test Package : IND 2 (Additional Tests: TAN Man)

CANADIAN GENERAL TOWER LTD.
 52 MIDDLETON STREET, P.O. BOX 160
 CAMBRIDGE, ON
 CA N1S 2R4
 Contact: Bob Abell
 bob.abell@cgtower.com
 T: (519)623-1630
 F: (519)623-7018

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.