

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

9 MILL SIZING GEAR REDUCER

Gear Reducer

Fluid

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2021	May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0957332	WC0583355	
Sample Date		Client Info		29 May 2024	01 May 2021	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	SEVERE	
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	3	
Iron	ppm	ASTM D5185(m)	>150	7	22	
Chromium	ppm	ASTM D5185(m)	>10	0	<1	
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	<1	
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	
Lead	ppm	ASTM D5185(m)	>100	0	<1	
Copper	ppm	ASTM D5185(m)	>50	<1	1	
Tin	ppm	ASTM D5185(m)	>10	0	0	
Antimony	ppm	ASTM D5185(m)	>5	0	<1	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
					•	,
Boron	ppm	ASTM D5185(m)		<1	3	
Barium	ppm	ASTM D5185(m)		0	0	
Molybdenum	ppm	ASTM D5185(m)		0	<1	
Manganese	ppm	ASTM D5185(m)		0	<1	
Magnesium	ppm	ASTM D5185(m)		2	2	
Calcium	ppm	ASTM D5185(m)		52	101	
Phosphorus	ppm	ASTM D5185(m)		332	354	
Zinc	ppm	ASTM D5185(m)		429	435	
Sulfur	ppm	ASTM D5185(m)		1535	1671	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	0	1	
Sodium	ppm	ASTM D5185(m)		<1	3	
Potassium	ppm	ASTM D5185(m)	>20	0	<1	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.31	0.51	



OIL ANALYSIS REPORT

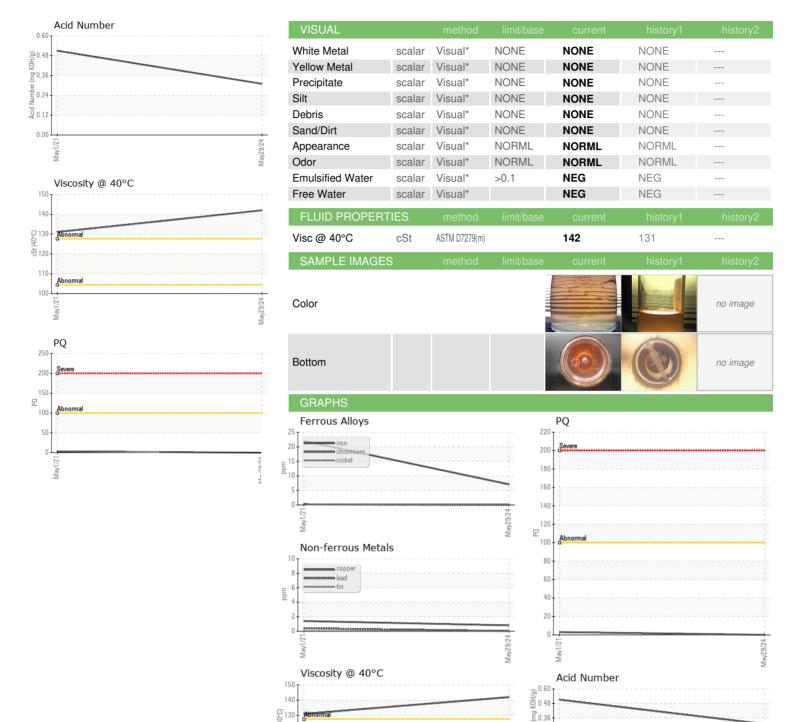



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number : 5802524 Test Package : IND 2

: WC0957332 : 02644985

ਲੂੱ 120

110

100

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Validity of results and interpretation are based on the sample and information as supplied.

Received **Tested** Diagnosed

: 02 Jul 2024 : 04 Jul 2024 : 04 Jul 2024 - Wes Davis

은 0.24

0.12

0.00

ArcelorMittal 193 Givins Street, P.O.Box 1589,, Central Sotres - Door 44 Woodstock, ON

CA N4S 5Y8 Contact: Jeff Pottruff jeff.pottruff@arcelormittal.com

> T: (519)537-6671 F: (519)537-7384

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Contact/Location: Jeff Pottruff - DOFWOO